



ARIEL Facility Safety Report



This report is submitted to the CNSC in support of a licence to commission ARIEL I








Document Type: **Quality Plan**

Release: **3** **Release Date:** **2015/07/06**

Author(s): **A. Trudel - with contributions from the ARIEL project team**

Note: Before using a copy (electronic or printed) of this document you must ensure that your copy is identical to the released document, which is stored on TRIUMF's document server.

ARIEL Facility Safety Report		
Document-51332	Release No. 3	Release Date.: 2015/07/06

	Name:	Signature:	Date:
Author:	A. Trudel		2015-06-28
Reviewed By:	S. Koscielniak		2015/July/06
Reviewed By:	F. Ames		2015-07-06
Reviewed By:	Y. Bylinsky		3-JUL-2015
Reviewed By:	R. Kruecken		2015-06-30
Reviewed By:	M. Trinczek		3 July 2015
Approved By:	L. Merminga		July 6, 2015

ARIEL Facility Safety Report		
Document-51332	Release No. 3	Release Date.: 2015/07/06

History of Changes

Release Number	Date	Description of Changes	Author(s)
1	2012/03/26	Application for Construction Licence	A. Trudel
2	2014/03/10	Revised to include program of commissioning	A. Trudel
3	2015/07/06	Revised to include 10 kW dump operation and an update for commissioning	A. Trudel

ARIEL Facility Safety Report		
Document-51332	Release No. 3	Release Date.: 2015/07/06

TABLE OF CONTENTS

Chapter 1: General Information	11
1.1 Purpose.....	11
1.2 Scope	11
1.3 Referenced Documents	11
Chapter 2: General Description and Organization	14
2.1 General Description	14
2.2 Organization	15
2.2.1 Governance	15
2.2.2 Design and Construction	15
2.2.3 Operational	16
2.2.4 Safety Management	17
Chapter 3: Facility Description	19
3.1 ARIEL Site and Buildings.....	19
3.1.1 Location	19
3.1.2 Layout	20
3.1.3 Elevations	20
3.1.4 Building Description	22
3.1.5 Occupancy in ARIEL	26
Chapter 4: Accelerator Design	27
4.1 Design	28
4.2 Staging	28
4.3 E-linac Major Components.....	29
4.3.1 E-Gun	29
4.3.2 Low-Energy Beam Transport	29
4.3.3 Buncher Cavity	29
4.3.4 Injector Cryomodule (EINJ)	29
4.3.5 Medium-Energy Beam Transport (MEBT)	30
4.3.6 Accelerator Cryomodules (EACs)	30
4.3.7 High-Energy Beam Transport	30
4.3.8 Beam Diagnostics	30
4.3.9 Machine Protection System (MPS)	31
4.3.10 Operating Envelope Current Monitoring System– RF Shields	32

ARIEL Facility Safety Report		
Document-51332	Release No. 3	Release Date.: 2015/07/06

4.3.11 RF Power Sources and Distribution	32
4.3.12 Cryogenic System	33
4.3.13 Vacuum System	34
4.3.14 Electrical Services	34
4.3.15 Control System	34
4.3.16 100 kW Beam Dump (EHD) Design & Services	35
4.4 Building Services.....	35
4.4.1 Electron Hall Building Services	35
4.4.2 ARIEL Building Services	36
4.5 E-linac Control Room & Human Factors Engineering	36
Chapter 5: Hazard Analysis	37
5.1 Electron Linear Accelerator Radiation Hazards.....	37
5.1.1 Prompt Radiation – Photons	37
5.1.2 Prompt Radiation – Neutrons	38
5.1.3 Air Activation for the Electron Hall	39
5.1.4 Residual Radiation & Activation	41
5.2 Non-radiological Hazards.....	43
5.2.1 Seismic Hazard	43
5.2.2 Conventional Electrical Hazards	44
5.2.3 Ozone Production	44
5.2.4 Radiolysis for the 100 kW Beam Dump	45
5.2.5 Thermal Considerations for the Beam Dump	46
5.2.6 Oxygen Deficiency Hazard	47
Chapter 6: Mitigation Measures	50
6.1 Shielding for the Electron Hall	50
6.1.1 Shielding Requirements	50
6.1.2 Photon and Neutron Shielding Requirements	51
6.1.3 100 kW Beam Dump Shielding	55
6.1.4 De-rated (10kW) Beam Dump Shielding	58
6.1.5 Dismantling the 10 kW Beam Dump Shielding	62
6.1.6 Shielding Verification using FLUKA	62
6.2 Access Control and Radiation Monitoring System	70
6.2.1 Interlocked Access Control System	70
6.2.2 E-Linac Radiation Monitoring System	73

ARIEL Facility Safety Report		
Document-51332	Release No. 3	Release Date.: 2015/07/06

6.2.3	Emergency Power	75
6.3	Operating Mode Definitions	75
6.4	Electron Hall Air Monitoring.....	75
6.5	Radiation Surveys and Area Dosimeters.....	76
6.6	Personnel Dose Monitoring.....	76
6.7	Mitigation of Other Hazards	77
6.7.1	Ozone Monitoring	77
6.7.2	Hydrogen Monitoring for the Beam Dump	77
6.7.3	Oxygen Deficiency Monitoring System & Cryogen Safeguards	77
6.7.4	SF ₆ Mitigation Measures	78
6.7.5	Fire Suppression Systems	78
6.7.6	Communication Systems	78
6.8	Excursions from Normal Operation.....	78
6.8.1	Radiation Monitoring System Failure	78
6.8.2	Oxygen Deficiency Monitoring System Failure	79
6.8.3	Cooling Water Failure	79
6.8.4	Electrical Power Failure	79
6.8.5	Fire	79
6.8.6	Explosion	79
6.8.7	Design Level Earthquake	80
Chapter 7:	Commissioning	81
7.1	E-Linac Commissioning	81
7.2	Administrative Procedures	83
7.3	E-Linac Radiation Safety System Commissioning	83
7.4	Oxygen Deficiency Monitoring System Commissioning	83
7.5	Shielding and Radiological Assessment.....	84
7.6	E-Linac Control Room Human Factors Engineering	84
7.7	Training Implementation.....	84
Appendix A		85

ARIEL Facility Safety Report		
Document-51332	Release No. 3	Release Date.: 2015/07/06

TABLE OF FIGURES

Figure 2-1 ARIEL I Project Governance Chart	15
Figure 2-2 ARIEL Project Design Team Organizational Chart.	16
Figure 2-3 Operations Group Organizational Chart May 2015	17
Figure 3-1 Architect rendition of the ARIEL building nestled between the Main Office Building and the ISAC building	20
Figure 3-2 Architectural Plan at the B2 Level of ARIEL	21
Figure 3-3 Architectural plan showing a section through the ARIEL building as well as the Electron Hall	22
Figure 4-1 E-Linac equipment layout for the Electron Hall. The schematic is at the 264' elevation except for the maze exit in the NE (top right) corner which is at the 284' elevation on top of the BL4N shielding blocks. [An up to date beamline layout showing the locations of analyzing dumps is included in the Appendix A drawing list.]	27
Figure 5-1 Bremsstrahlung dose rate angular distribution normalized to 0° for electrons striking a thick high Z target.	38
Figure 5-2 Equilibrium airborne activity concentration in DAC and total exhausted airborne activity in DRL as a function of Electron Hall exhaust rate.	41
Figure 5-3 Dose rate at 6 m above the uncovered 100 kW beam dump as a function of time after the end of bombardment (EOB). The irradiation profile assumes twenty years of irradiation for 1 month annually with 1.33 mA, 75 MeV electrons..	42
Figure 5-4 The dose rate at 1 m from the 100 kW water package as a function of time after the end of two months of bombardment (EOB)..	43
Figure 6-1 Plan view of the e-Linac and the shielding enclosure that makes up the Electron Hall. The inner north-south shielding wall is ten feet tall and provides prompt radiation shielding for the equipment gallery on the east side of the wall. Additional shielding added to the south wall to protect occupants at the B2 level (location F) is also shown.	51
Figure 6-2 Attenuation of neutrons in concrete from different energy electrons impinging on different material targets	53
Figure 6-3 Elevation view taken at the accelerator axis looking towards the Cyclotron Vault. The tunnel extending North of the Electron Hall can be seen on the left. The letters refer to locations discussed in the text. This section is to the West of the Service Annex space to the South of the Hall, and as a result shows the soil fill at the B2 and B1 level.	54
Figure 6-4 Elevation view looking North showing the West Service Tunnel located below the Electron Hall. It will be used for routing North to South cryogenic pipes and cable trays for the electrical services for the e-Linac. The inside concrete shielding wall is shown in the middle of the hall. The additional shielding at the ends of the roof beams is also shown.	55

ARIEL Facility Safety Report		
Document-51332	Release No. 3	Release Date.: 2015/07/06

- Figure 6-5 Elevation view of the simulation geometry for the shielded dump showing the layers of steel (brown) and concrete (green). The layers in the Electron hall poured-in-place concrete for the west wall and floor were used for biasing in the simulation. 56
- Figure 6-6 Elevation view of the 10kW dump shielding sectioned through the beam line showing the aluminum insert, the surrounding lead shielding, and the bulk and upstream concrete shielding. 59
- Figure 6-7 Plan view showing the total dose rate for the 10 kW dump bulk and upstream shielding. Neutron dose rates at concrete and soil boundaries are noted. The south side dose rate is a total dose rate. 60
- Figure 6-8 Elevation view showing the total dose rate for the 10 kW dump bulk and upstream shielding. Neutron dose rates at concrete and soil boundaries are noted. The dose rate above is a total dose rate. 60
- Figure 6-9 Attenuation through the dogleg shielding void in the North wall for different elevations. The horizontal dashed line is at 50 mSv/h and the vertical dashed line indicates the total thickness of concrete shielding used in the simulation 64
- Figure 6-10 Specification for the BL4N/ARIEL tunnel shielding. 65
- Figure 6-11 Total dose rate for a 50 MeV, 100 kW beam loss immediately downstream of the second cryomodule. 66
- Figure 6-12 Elevation view showing the photon & neutron ambient dose rate at Location B for a 50 MeV, 500 kW electron beam loss just inside the north shielding wall. Location B above the slab is indicated. 67
- Figure 6-13 Attenuation of the dose equivalent through the six foot thick slab at the 284' elevation. The red arrow marks the top of the slab. 67
- Figure 6-14 Elevation view looking South showing the penetration of photons and neutrons for the roof beams for a 50 MeV, 500 kW electron beam loss. The region right of the West shielding wall ($X > 1.2\text{m}$) is normally filled with soil below grade ($Y < 7.6\text{m}$) 68
- Figure 6-15 Elevation view looking West showing the photon and neutron penetration for the roof beams for a 50 MeV, 500 kW electron beam loss. Locations B and C are also indicated. 68
- Figure 6-16 Dose equivalent attenuation through the roof beams for an accidental full loss of 75 MeV, 500 kW electrons in the e-Hall. The red line indicates the outside of the roof beam. 69
- Figure 6-17 Elevation view looking West showing the photon and neutron dose rate on the South side at different elevations 69
- Figure 6-18 Neutron dose rates at the B2 level (264'elevation) and the 284' elevation showing the attenuation along each of the access mazes for the Electron Hall 70
- Figure 6-19 Schematic of the e-Linac Access Control Systems and the interface to the different components and the e-Linac Radiation Monitoring System 73
- Figure 6-20 Schematic showing the location of e-Hall gamma monitors. These are located on the roof at elevation 297' and one is on the lower elevation roof (284') at the

ARIEL Facility Safety Report		
Document-51332	Release No. 3	Release Date.: 2015/07/06

north end of the e-Hall. [N.b. The gap in the south wall is where the 4-foot thick shielding door will be located.]	74
Figure 6-21 Schematic showing the location of the neutron/gamma monitor pairs. One is located at the 264' elevation south exit maze, and the other is located at the 284' elevation north exit maze from the Electron Hall. [N.b. The gap in the south wall is where the 4-foot thick shielding door will be located.]	75
Figure 7-1 Electron Hall beam line component layout January 2014	82

ARIEL Facility Safety Report		
Document-51332	Release No. 3	Release Date.: 2015/07/06

LIST OF TABLES

Table 5-1 Air activation for a chronic beam loss in the Electron Hall	39
Table 5-2 Cryogenic liquid and gas volumes required to create an oxygen deficiency hazard in the e-Hall and Compressor Building. LN2 is not shaded and LHe is in the shaded rows,	48
Table 6-1 Different material Tenth Value Layer (TVL) thicknesses for 50 MeV electrons incident on a thick, high-Z target	52
Table 6-2 attenuation factors for gamma and neutron through the thickness shielding for different locations and the associated dose rates outside shielding	53
Table 6-3 Local shielding thickness for the 100 kW dump	56
Table 6-4 Maximum dose rates at the inner and outer boundary of the poured-in-place concrete in the Electron hall	57
Table 6-5 10 kW dump shielding thicknesses	59
Table 6-6 - Neutron dose rates at the soil boundaries outside the north and west walls and the floor for the 10 kW dump and in the last row for the 100 kW dump (see Table 6-4)	61

ARIEL Facility Safety Report		
Document-51332	Release No. 3	Release Date.: 2015/07/06

Chapter 1: General Information

The ARIEL (Advanced Rare IsotopE Laboratory) facility at TRIUMF is a new rare isotope beam (RIB) facility complementing the existing ISAC and ISAC-II facilities. This chapter describes the purpose and scope of this report.

1.1 Purpose

This report has been prepared for submission to the Canadian Nuclear Safety Commission (CNSC) in support of an application to commission the first phase of ARIEL, a Class II electron linear accelerator (e-Linac) housed in the Electron Hall at TRIUMF, on the campus of the University of British Columbia (UBC) in Vancouver, BC. The report describes the facility and its environmental impact; the potential hazard associated with its operation, and includes a safety assessment of the mitigation of those hazards.

1.2 Scope

This report describes the layout of the full ARIEL facility but otherwise the scope of the hazard analysis is limited to the e-Linac and its operation in the Electron Hall. Release 3 has incorporated the following additional information:

- a section on operation of the tuning dump de-rated to 10 kW operation that does not include rastering of the beam;
- more complete information on the thermal analysis of the tuning dump;
- a revised section on the machine protection system;
- new sections on beam diagnostics and the non-intercepting current monitoring system; and
- an update on the e-Linac Control Room Human Factors Engineering Program Plan.

The scope of the next release will be expanded to include the ARIEL building and associated services for beam delivery to a rare isotope beam production target..

The safety analysis along with the additional assessments presented in the report demonstrates that the operation of this facility can be conducted in a safe manner.

1.3 Referenced Documents

[ARIEL I Project Plan](http://documents.triumf.ca/docushare/dsweb/Get/Document-43266) (http://documents.triumf.ca/docushare/dsweb/Get/Document-43266)

[TRIUMF Quality Manual](http://documents.triumf.ca/docushare/dsweb/Get/Document-611) (http://documents.triumf.ca/docushare/dsweb/Get/Document-611)

[TSOP-02 Nonconformity Reporting and Resolution](http://documents.triumf.ca/docushare/dsweb/Get/Document-4758)
(http://documents.triumf.ca/docushare/dsweb/Get/Document-4758)

[TSOP-10 TRIUMF Site Access](http://documents.triumf.ca/docushare/dsweb/Get/Document-1733) (http://documents.triumf.ca/docushare/dsweb/Get/Document-1733)

ARIEL Facility Safety Report		
Document-51332	Release No. 3	Release Date.: 2015/07/06

[TSOP-11 Operations Management](http://documents.triumf.ca/docushare/dsweb/Get/Document-5604) – (<http://documents.triumf.ca/docushare/dsweb/Get/Document-5604>)

IAEA Technical Report Series No. 188 (TRS188) Radiological Safety Aspects of the Operation of Electron Linear Accelerators, 1979

National Council on Radiation Protection Report No. 51 (NCRP51) Radiation Protection Guidelines for 0.1 – 100 MeV Particle Accelerator Facilities, 1977

National Council on Radiation Protection Report No. 144 (NCRP144) *Radiation Protection for Particle Accelerator Facilities*, 2003

[TSOP-12 Configuration Management](http://documents.triumf.ca/docushare/dsweb/Get/Document-5605) (<http://documents.triumf.ca/docushare/dsweb/Get/Document-5605>)

[TSOP-13 Commissioning](#)

(<http://documents.triumf.ca/docushare/dsweb/Get/Document-5708>)

[TSN 5.8 - Electrical Safety at TRIUMF](http://documents.triumf.ca/docushare/dsweb/Get/Document-870) (<http://documents.triumf.ca/docushare/dsweb/Get/Document-870>)

[TSN 5.11 - High Voltage Safety](http://documents.triumf.ca/docushare/dsweb/Get/Document-10581) (<http://documents.triumf.ca/docushare/dsweb/Get/Document-10581>)

[TSN 1.3 - TRIUMF Lock-out Policy and Procedures](#)

(<http://documents.triumf.ca/docushare/dsweb/Get/Document-539>)

[TSN 1.8 - TRIUMF's Policy for Maximum Allowable Dose Rates in Accessible Areas](#)

(<http://documents.triumf.ca/docushare/dsweb/Get/Document-544>)

[TSN 1.2 TRIUMF Policy on Radiation Exposure](#)

(<http://documents.triumf.ca/docushare/dsweb/Get/Document-545>)

[TRIUMF Fire Protection Program](#) (<http://documents.triumf.ca/docushare/dsweb/Get/Document-29313>)

[TRIUMF Emergency Response Plan](http://documents.triumf.ca/docushare/dsweb/Get/Document-5856) (<http://documents.triumf.ca/docushare/dsweb/Get/Document-5856>)

[Specifications for the ARIEL eHall Shielding, TRI-DN-13-11](#)

(<http://documents.triumf.ca/docushare/dsweb/Get/Document-77790>)

[E-linac 100 kW Tuning Beam Dump Local & Upstream Shielding, TRI-DN-13-29](#)

(<http://documents.triumf.ca/docushare/dsweb/Get/Document-103968>)

[E-linac Commissioning Plan](http://documents.triumf.ca/docushare/dsweb/Get/Document-108335) (<http://documents.triumf.ca/docushare/dsweb/Get/Document-108335>)

[E-linac Shielding Assessment Plan](http://documents.triumf.ca/docushare/dsweb/Get/Document-108545) (<http://documents.triumf.ca/docushare/dsweb/Get/Document-108545>)

[Commissioning Plan for the E-linac Radiation Safety System](#)

(<http://documents.triumf.ca/docushare/dsweb/Get/Document-108174>)

[Human Factors Engineering Program Plan for the E-linac Control Room](#)

(<https://documents.triumf.ca/docushare/dsweb/Get/Document-108553>)

[E-hall & Compressor Building Oxygen deficiency Hazard Analysis and Mitigation](#)

(<http://documents.triumf.ca/docushare/dsweb/Get/Document-108576>)

[Training Plan-Working in Exclusion Areas \(Document-114192\)](#)

[E-Linac Commissioning Team Training Program \(Document-120509\)](#)

ARIEL Facility Safety Report		
Document-51332	Release No. 3	Release Date.: 2015/07/06

[E-Linac Operating Envelope Current Monitoring System \(Document-117036\)](#)

[TRI-DN-13-03 Preliminary Design of Target/Cooling Plate and Raster Pattern for a 100 kW Electron Beam Dump at 25-75 MeV \(Document-70781\)](#)

[TRI-DN-13-24 Design Considerations for Quadrant Monitor for E-Linac 100 kW Electron Beam Dump \(Document-103722\)](#)

[E-Linac Electron High Energy Beam Dump \(EHD\) System Requirement Specifications \(Document-57707\)](#)

[E-Hall & Compressor Building Oxygen Deficiency Hazard Analysis and Mitigation \(Document-108576\)](#)

[TRI-DN-13-29 E-Linac 100 kW Tuning Beam Dump Local and Upstream \(EHDT beamline\) Shielding Design \(Document-103968\)](#)

[De-rated e-Linac Tuning Beam Dump Shielding Design, Prompt and Residual Dose Rates and Activation \(Document-111865\)](#)

[E-Linac Access Control System Requirements \(Document-43329\)](#)

[Review of MPS Detector Tests \(Document-121169\)](#)

ARIEL Facility Safety Report		
Document-51332	Release No. 3	Release Date.: 2015/07/06

Chapter 2: General Description and Organization

This chapter provides a general description of the proposed ARIEL facility and discusses the overall responsibilities for the conduct of this project. An overview of the organizational structure related to the operation of ARIEL through the commissioning phase is included.

2.1 General Description

In 1995, the Canadian government funded the construction of a new rare-isotope beam (RIB) facility at TRIUMF called ISAC (Isotope Separator and Accelerator). ISAC, an ISOL-type (Isotope Separation On-Line) facility, has provided beams of rare isotopes at low energies since 1998 and at energies up to 1.5 MeV/u since 2001. A high-energy extension to ISAC, ISAC-II, has been in operation since 2006. This document describes ARIEL (Advanced Rare IsotopE Laboratory), a complementary ISOL-type facility that will provide additional RIB to be delivered to the existing ISAC experimental areas through a combination of new and existing beamlines.

In June 2010 funding was received from the National Research Council (NRC), the Canadian Foundation for Innovation (CFI) and the province of BC to provide the go ahead for ARIEL, a project that will extend TRIUMF's current Rare Isotope Beam (RIB) program for Nuclear Physics and Astrophysics, Nuclear Medicine and Materials Science. ARIEL will be similar in many ways to the existing ISAC facility. At ISAC, high-energy protons from TRIUMF's main cyclotron are impinged on thick production targets to generate rare isotopes by spallation and other processes. These isotopes are then extracted and transported electrostatically to a low-energy research area or reaccelerated to several MeV/u for experiments at higher energies. At ARIEL, a new electron linear accelerator (or "e-Linac") with an energy of 49 MeV¹ and total power of 500 kW will be used as a driver accelerator for the production of rare isotopes by photon-induced fission ("photofission") in one of two separate, new, target stations. New mass separator facilities and low-energy beam transport will couple the ARIEL target station to the ISAC experimental halls. This will allow the combined ISAC and ARIEL facilities to deliver multiple RIB to experiments at high and low energies simultaneously, greatly increasing TRIUMF's research capabilities. The technical aspects of the facility, including the new beamlines, target area, and RIB transport, are described in Section 4.3.

ARIEL includes about 3728 m² of constructed area. The location and layout of the facility and its associated infrastructure are described in Chapter 3.

TRIUMF is responsible for the manufacture of the SRF e-Linac, including beam transport lines, control system, installation and commissioning.

ARIEL is being constructed in phases. With the present funding, ARIEL I will comprise an e-Linac to deliver a 30 MeV, 100 kW accelerated beam on a beam dump in the Electron Hall, and a beamline from the Electron Hall to the Target Hall along the new ARIEL tunnel. TRIUMF has secured funding for part of the next phase of ARIEL and is in the process of preparing its application to CFI for the funding the

¹ 49 MeV is used in the report as the design energy for the e-Linac as it is licensed as a Class II facility and as such should not exceed 50 MeV beam energy. All the analysis has been done at 50 MeV for simplicity.

ARIEL Facility Safety Report		
Document-51332	Release No. 3	Release Date.: 2015/07/06

next stages of ARIEL II that will include two new target stations and the low energy beam transports to the ISAC experimental halls.

Although the ARIEL facility will only have a 49 MeV, 500 kW electron driver, the facility has been designed to allow for potential future expansion to accommodate a second driver of 100 uA, 500 MeV protons. A separate licence application and safety analysis would be submitted when funding for such an expansion becomes available.

2.2 Organization

2.2.1 Governance

The governance for the ARIEL Project is in accordance with documentation supplied to CFI via the University of Victoria to meet conditions for the project award. A chart showing the lines of responsibility for governance is shown in Figure 2-1. More information is provided in the [ARIEL I Project Plan](#).

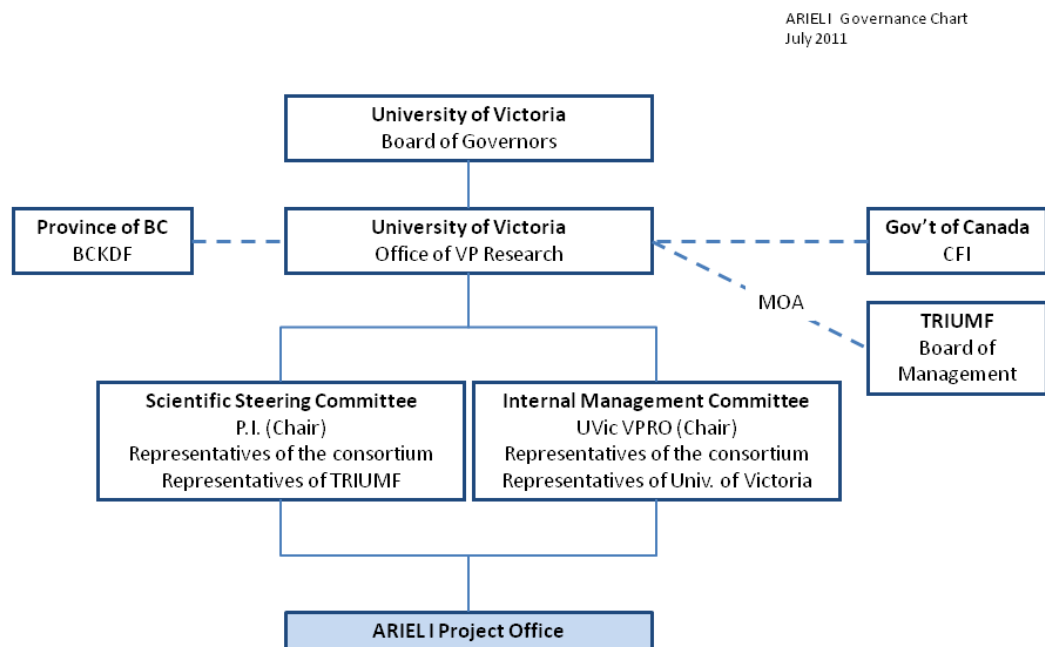


Figure 2-1 ARIEL I Project Governance Chart

2.2.2 Design and Construction

The organization of the Project Design Team for the design and construction of ARIEL is shown in Figure 2-2. Overall project coordination is shared between the head of the Accelerator Division and the head of the Engineering Division. The

ARIEL Facility Safety Report		
Document-51332	Release No. 3	Release Date.: 2015/07/06

Project Management Office positions are specified (A0) and a number of TRIUMF engineers and physicists have been seconded as Work Package (WP) Leaders (A1 – A5) with responsibilities for the design of various subsystems. Chernoff Thompson Architects were responsible for the building design and the Conventional Facilities WP Leader was responsible for the construction management. Details of the definition of the project, the responsibilities of members of the design team and the control of approvals for design, construction, fabrication, installation, commissioning and other project activities were defined in the [ARIEL I Project Plan](#). The ARIEL building construction was completed in mid- 2013 and the building handed over to TRIUMF in September 2013.

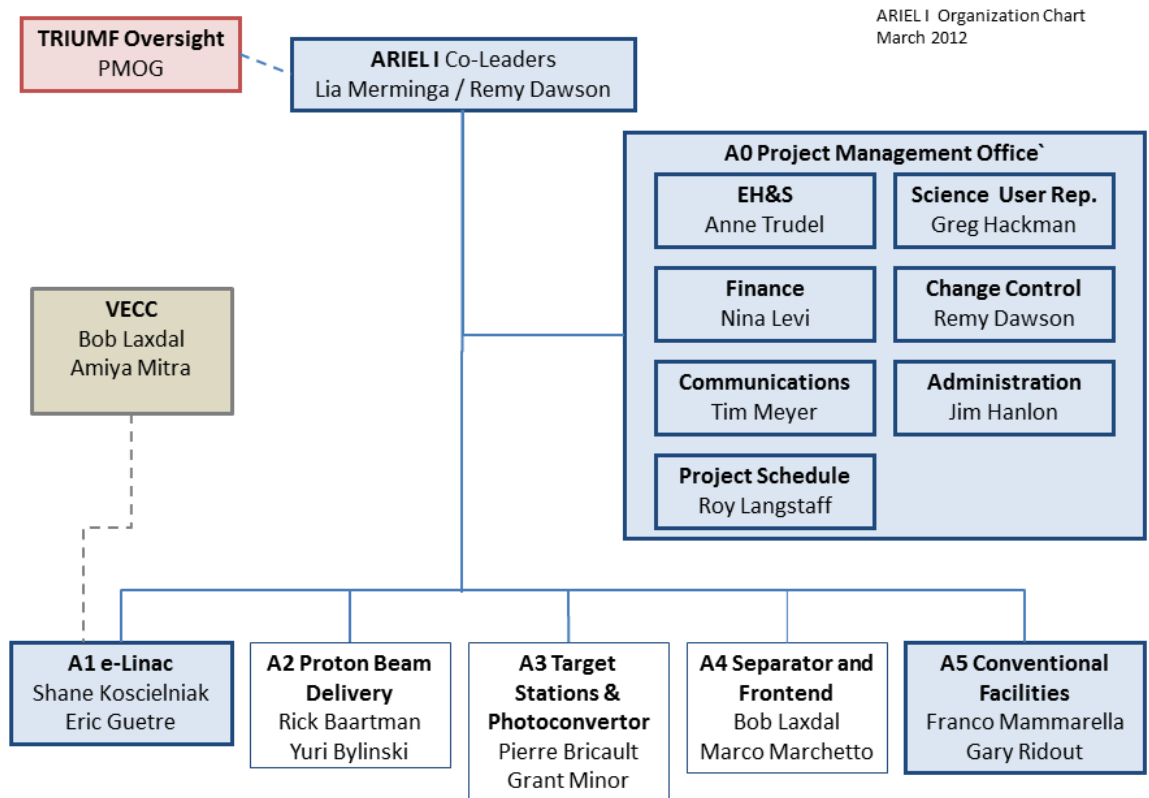


Figure 2-2 ARIEL Project Design Team Organizational Chart.

2.2.3 Operational

Operation for the e-Linac will be the responsibility of the Operations Group within the Accelerator Division. This group operates TRIUMF's 520 MeV cyclotron, ISAC and TR13 facilities. The Operations Group organizational chart is included in Figure 2-3. Ms. V. Toma who has been Acting Manager of Operations since July 2014, reports to the Head of the Accelerator Operations who in turn reports to the Head of Accelerator Division.

ARIEL Facility Safety Report		
Document-51332	Release No. 3	Release Date.: 2015/07/06

The head of the commissioning team for operation of the e-Linac in the Electron Hall, S. Koscielniak, will be the lead for the e-Linac Work Package.. The team shall consist of equipment experts in each sub-system area, as well as beam optics and dynamics experts for each of the accelerator and beam transport systems.

Commissioning will be carried out according to the requirements of TRIUMF's [TSOP-13](#) for Commissioning. In addition, operation for the purposes of commissioning shall follow the processes in TSOP-11 for the two basic activities at commissioned facilities, beam delivery and equipment maintenance. A commissioning plan (Document-108335) is in place and more information is provided in Chapter 7.

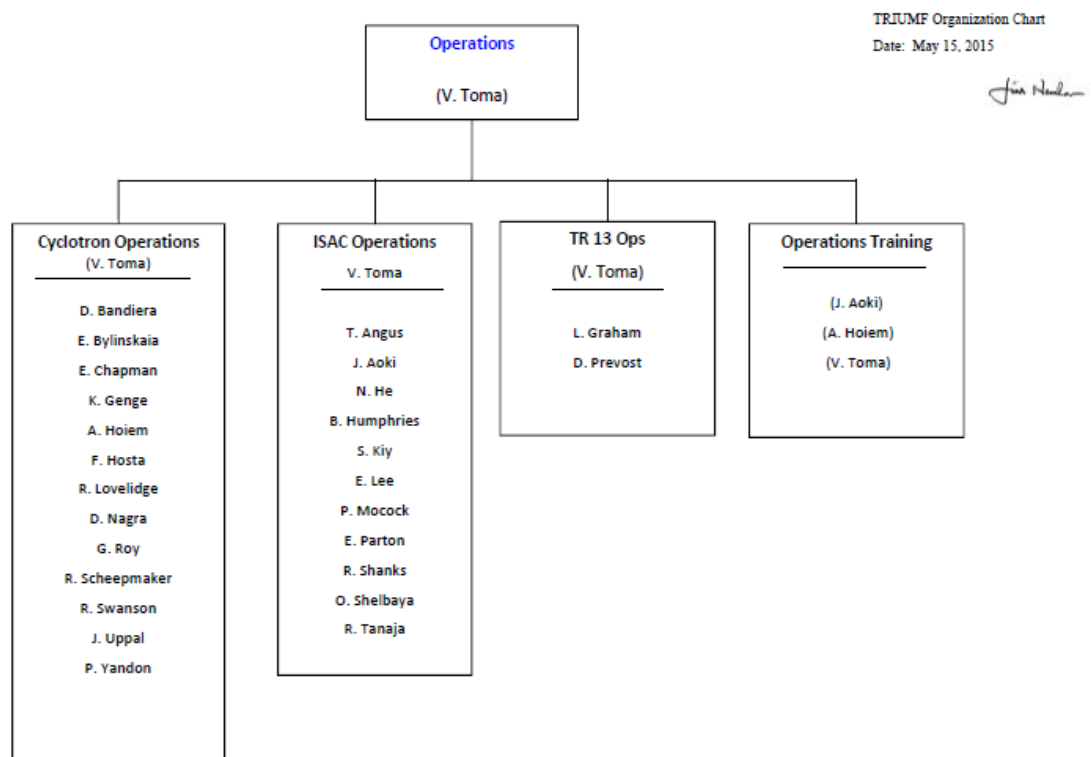


Figure 2-3 Operations Group Organizational Chart May 2015

2.2.4 Safety Management

The safety committees within the TRIUMF organizational structure that presently oversee the operation of the existing accelerator and experimental facilities programs are described in the [TRIUMF Quality Manual](#). The same organizational structure will apply to the ARIEL facility.

Operation of ARIEL will be reviewed regularly at the TRIUMF Quarterly Safety Management Meetings where the manager of Accelerator Operations reports on operational performance and safety for all accelerator facilities. Additionally the Accelerator Division Safety Review Committee will review ongoing operation and ensure adequate safeguards are in place for safe operation of the facility. The Radiation Protection Group will monitor operation through their regular survey

ARIEL Facility Safety Report		
Document-51332	Release No. 3	Release Date.: 2015/07/06

schedule and with on-demand surveys as required by the Work Permit process for access to high radiation areas at ARIEL.

The TRIUMF Joint Health and Safety Committee (JHSC), is the provincially-mandated workplace safety committee and has members from the management and technical staff. The committee inspects the entire TRIUMF site at regular intervals and deficiencies with respect to the regulations of Work Safe BC are filed as nonconformities and tracked for corrective action according to [TSOP-02 Nonconformity Reporting and Resolution](#). JHSC members also perform follow-up inspections to ensure the effectiveness of corrective actions.

ARIEL Facility Safety Report		
Document-51332	Release No. 3	Release Date.: 2015/07/06

Chapter 3: Facility Description

This chapter contains a description of the TRIUMF site and the facilities located on that site. The location of the ARIEL facility with relation to the existing cyclotron facilities is described and a general layout is provided. A description of the adjacent areas and assumed occupancy factors are included.

3.1 ARIEL Site and Buildings

3.1.1 Location

The TRIUMF site is located at 4004 Wesbrook Mall in the South Campus Research Precinct of the University of British Columbia in Vancouver. The ARIEL facility is located near the North boundary of the TRIUMF site nested between the Main Office Building and the existing ISAC-I facility and Remote Handling Building to the East, as shown in Figure 3-1. The e-Linac is located below ground in the Electron Hall, the former Proton Hall of the Main Cyclotron Building. A 45 m long underground tunnel extends from the Electron Hall and encloses the electron transport line to the ARIEL Target Hall.

The ARIEL facility is located within the TRIUMF security fence as is the case for the existing ISAC-I and ISAC-II facilities and all other TRIUMF accelerators. Access to the area within the fence is restricted as described in TRIUMF Standard Operating Procedures, [TSOP-10 TRIUMF Site Access](#).



ARIEL Facility Safety Report		
Document-51332	Release No. 3	Release Date.: 2015/07/06

Figure 3-1 Architect rendition of the ARIEL building nestled between the Main Office Building and the ISAC building

3.1.2 Layout

Architectural plans of ARIEL are shown in Figure 3-2 for a section at the B2 level and in Figure 3-3 for a section further east of the tunnel through the east part of the Electron Hall and the middle of the ARIEL building. ARIEL includes the following functional areas proceeding from South to North:

Helium Compressor Building (not shown in Figure 3-2 and Figure 3-3)

Electron Hall

ARIEL Tunnel

ARIEL Building that includes again from South to North:

Target Preparation Area

Target Hall & Target Support Spaces

RIB Building

RIB Service Annex

3.1.3 Elevations

The site grade elevation is 289' above sea level. Elevations for the different floors in TRIUMF buildings are commonly referred to using the floor designations B2, B1, G and L1. For the Service Annex on the south side of the Electron Hall these designations correspond to the following elevations in feet: B2 – 264', B1 – 276', G – 289' and L1- 301'. The top of the Electron Hall roof beams are at 297' elevation, and the new lower roof area at the north end of the hall will be at 284' elevation. A service tunnel extends north south at the B3 level (255' elevation) below the Electron Hall. Penetrations for accelerator services exist between the Electron Hall and the service tunnel.

The RIB Building on the north end of the ARIEL Building will have the following elevations, B2 at 263', B1 at 276', G at 289' and the Penthouse at 317'. The Target Preparation Annex on the south side of the ARIEL Building will have B2 at 263' elevation, B1 at 281' to match the Target Hall B1 level, G at 293.75', L1 at 306.75' elevation and the penthouse above.

The beamline tunnel floor elevation will be 264'.

ARIEL Facility Safety Report		
Document-51332	Release No. 3	Release Date.: 2015/07/06

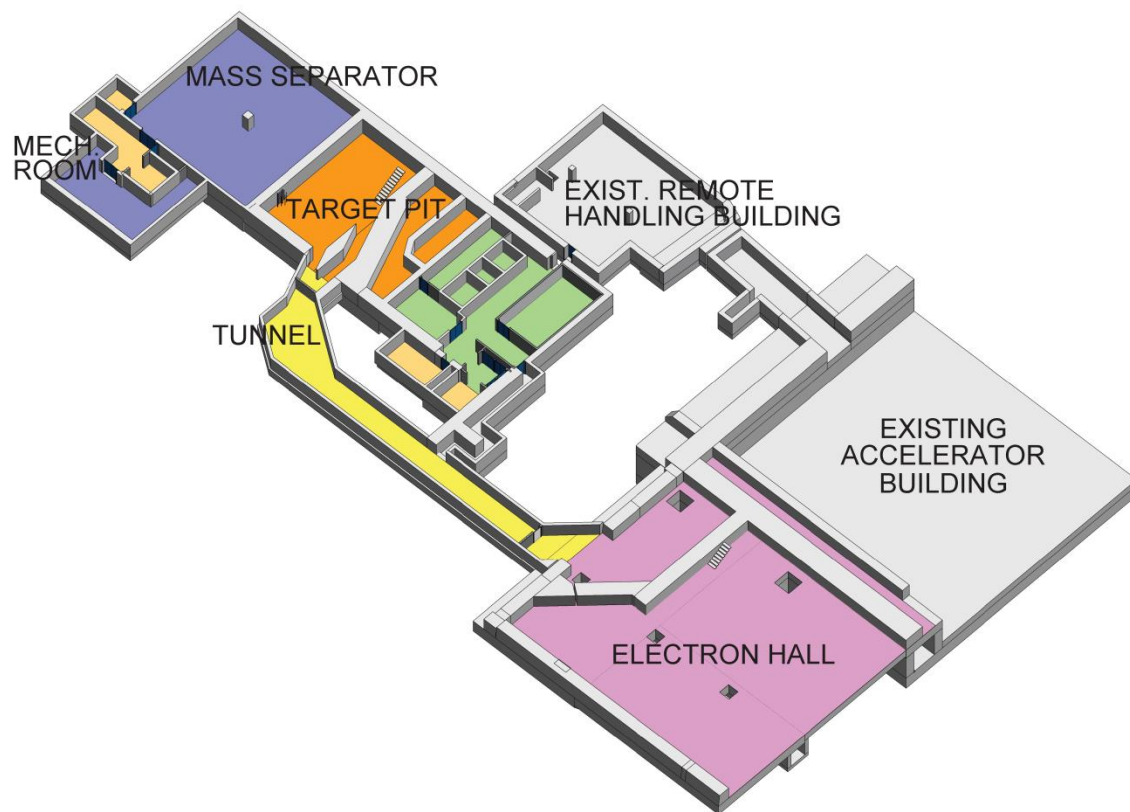


Figure 3-2 Architectural Plan at the B2 Level of ARIEL

ARIEL Facility Safety Report		
Document-51332	Release No. 3	Release Date.: 2015/07/06

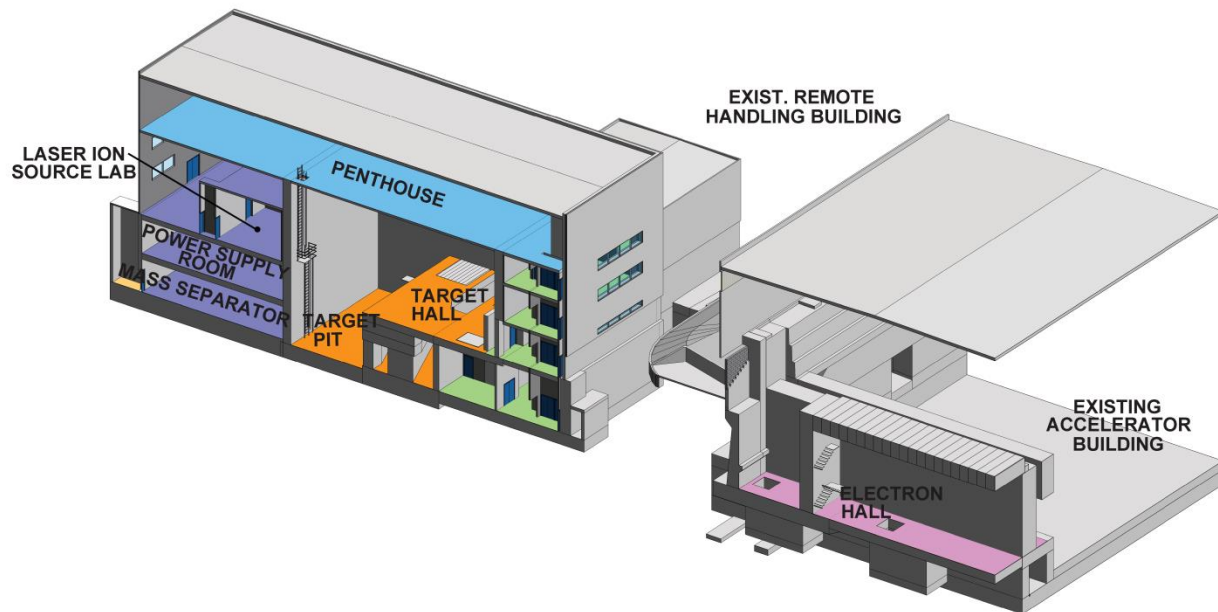


Figure 3-3 Architectural plan showing a section through the ARIEL building as well as the Electron Hall

3.1.4 Building Description

Appendix A contains drawings of ARIEL at each of the main floor elevations that can be consulted to help situate the areas described in this section.

3.1.4.1 Compressor Building

A new two storey Compressor Building (256 m²) has been built South of the roadway bordering the South side of the Main Accelerator Building (MAB). A trunk consisting of three 2"-8" lines carrying pressurized helium to the Electron Hall and recycled warm helium gas back from the Electron Hall, travel South through the MAB Service Annex (SA) at the 287' elevation and then at 3.5 m above the ground South from the Service Annex to the Compressor Building.

3.1.4.2 Electron Hall

The Electron Hall (e-Hall) is located in the old Proton Hall and is the underground space (600 m² at the 264' elevation) adjacent to the West wall of the Cyclotron Vault inside the MAB. It includes a service tunnel at the 255' elevation extending the full length of the e-Hall with an access door at the B3 level of the Main Accelerator Building Service Annex. A schematic of the e-Hall is included in Section 4, Figure 4-1. The e-Hall will contain the e-Linac and its associated equipment, the shielded 100 kW beam dump and associated water and vacuum services, and the first stage of electron-beam transport to the Tunnel. The NE part of the electron hall is reserved for

ARIEL Facility Safety Report		
Document-51332	Release No. 3	Release Date.: 2015/07/06

the future proton beam line BL4N that will provide a second driver for ARIEL. Access to this space is via the ARIEL tunnel for personnel and light material.

The shielding inside the e-Hall was reorganized and augmented over old proton hall shielding. A new shielding wall was added to separate the e-Hall proper from the future BL4N tunnel section. The shielding wall configured with a poured in place section and additional eighteen foot removable blocks will have a minimum thickness of 3.7 m of concrete in order to allow occupancy of the e-Hall for maintenance when the future proton beam line is operational.

A 10 ton² crane was installed in the e-Hall, whose capacity is sufficient to handle the heaviest piece of equipment inside the e-Hall.

The 100 kW beam dump will be housed behind dedicated local shielding. The beam dump will be cooled via a dedicated High Active Low Conductivity Water package (HA-LCW) which is in turn cooled across a heat exchanger by the Low Active – LCW (LA-LCW). The dump has been designed so that the local shielding and servicing of the dump insert will be done with the MAB 50 ton crane through the e-Hall north hatch. The hatch is filled with removable blocks equal in thickness to the 1.8 m thick ceiling over the dump.

Access to the e-Hall is from the South for both material and personnel. An exit at the NE corner of the e-Hall, up a staircase and out onto the 284' elevation BL4N shielding blocks, provides a means of egress in case of emergency. The exit from the cyclotron vault into the proton hall has been retained, but the maze shielding has been reorganized to ensure safety for all modes of operation.

A larger opening needed to be cut in the north wall where the electron beamline branches north and downwards to transport the beam from the e-Hall to the ARIEL Tunnel. Sufficient shielding has been added on the BL4N side of the dogleg shielding void in order to allow occupancy in the tunnel with electron beam operation to the 100 kW dump in the e-Hall. With this shielding in place, there is no access from the Electron Hall to the ARIEL Tunnel. Access for services and cabling to the e-Hall will be via existing penetrations in the West and South wall and several new 'J' type round penetrations built into the new North wall.

The hall is kept at a slight depression with respect to atmospheric pressure in order to limit migration of air activation from chronic losses. The anticipated air activation levels are low (≤ 1 DAC) and an exhaust rate of approximately one volume per hour will limit migration out of the hall.

The roof of the e-Hall consists of 23 x 5 ft thick concrete beams weighing about 104 ton each. The beams have been grouted in place to make a solid slab. The roof top of the e-Hall houses HV power supplies, the ARIEL/e-Linac 12.5 kV switchgear and the 480 V and 208 V distribution systems to support local loads. Located on the northwest corner of the roof are rows of racks for power supplies, controls and diagnostics systems, and beam monitoring and radiation monitoring systems required for operations and safety.

² Unless stated otherwise in the report, all references are to an Imperial ton.
20150820 173500 Template: Document-31139 Rel.1

ARIEL Facility Safety Report		
Document-51332	Release No. 3	Release Date.: 2015/07/06

3.1.4.3 ARIEL Tunnel

The Tunnel is a 3 m wide by 2.7 m high structure with a floor elevation at 264', approximately 7.6 m below grade. It is ~ 45 m long and connects to the South with the Electron Hall and to the North with the Target Hall. Eventually, it will house both the electron beam and proton beam transport systems in a top-bottom arrangement. It is kept at a slight depression relative to atmospheric pressure. Access to this space is via the B2 level of the ARIEL building Target Preparation Annex.

Access for services from the South is through an array of 6" conduits that start just above grade outside the Main Accelerator Building and drop down following an S-shape into the top of the ARIEL Tunnel. Cabling and services from the North will come from the RIB Annex Power Supply room at the B1 level via an array of conduit external to the building and enter the North end of the ARIEL tunnel at an elevation below the proton beam plane.

3.1.4.4 ARIEL – Target Hall

The Target Pit at the North end of the Target Hall will house the heavily shielded RIB production target stations into which electron beams will be directed. Once the target shielding is installed, the Hall will be a contained volume through which access to the top of the target assemblies and their service connections will be gained from the south B1 Level of the Target Preparation Annex. Access to the top of the target assemblies will be achieved by removing demountable shielding with a 20-ton overhead crane.

The Hall will also house some of the target and basic service components such as air exhaust filters, closed-circuit target cooling water systems and vacuum system pumps and exhaust holding tanks. At the South end of the Hall there will be three hot cells for handling irradiated targets and target modules in much the same way that is done at ISAC. The hall will also house a spent target storage facility where irradiated targets will decay before disposing off-site for long-term storage, as well as a shielded enclosure for the activated target modules. The Hall will be an access controlled area with a PLC requiring that the area be secured before the crane controls are enabled for transport of target modules.

3.1.4.5 ARIEL - RIB Building

The RIB Building located North of the Target Hall will house the Mass Separator Room (MSR) at the B2 level where beam extracted from the target stations in the Target Hall will be separated by mass/charge state before being directed up to the RIB General Purpose Hall on the ground floor and into the ISAC-I Experimental Hall. The Mass Separator Room will also eventually house the Laser Ion Source laser beam optics table. For full power operation, it is expected that the MSR will be under access control.

At the B1 level above the MSR, is the Power Supply Room which will house the power supplies, controls and diagnostics, safety monitoring and HV stations for both

ARIEL Facility Safety Report		
Document-51332	Release No. 3	Release Date.: 2015/07/06

the East and West target stations. In addition, space in this room is allocated to power supplies, controls and diagnostics for the North sections of both the electron and proton beam lines. This area is designed for occupancy at full power operation.

The General Purpose Hall is on the ground floor of the RIB Building. RIB species separated in the Mass Separator Room are directed via two vertical transport lines up to the grade level GP Hall, where they will be directed via a switchyard, or after being subject to further charge stripping by a Charge State Booster, into the ISAC-I Experimental Hall. The RIB Building ground floor also includes the Laser Clean Room, a laboratory housing the laser beam equipment. The Laser beam is transported to the Target (both East and West) via a laser pipe going vertically down into the mass separator room and then horizontally South to the target stations through the laser ion source beam ports.

Access to the RIB Building will be via a staircase and elevator at the northwest corner of the building in the RIB Service Annex. This annex will also house electrical and ventilation chases supplying the B1 and B2 level of the RIB Building. The Mechanical Services Room located at the B2 level of the RIB Service Annex will contain the sumps for the ARIEL building. The Electrical Services Room located in the RIB Service Annex B1 level will house the ARIEL main 480v distribution and 208 V services as well emergency and UPS panels.

3.1.4.6 ARIEL – Target Preparation Area

This is a four storey wing on the South side of the Target Hall that contains a Target Preparation Room (B2 level), a Radiochemistry Lab (B1 Level), a cold Chemistry Lab (G Level) and the Target Hall Crane Control Room for remote handling of target modules (L1 Level). At the B2 level adjacent to the Target Hall hot cells is the hot cell support area where the hot cell technician operates the manipulators. Around the west side of the hot cells there is access to the Hot Cell Access area where contamination control is effected when maintenance is carried out for the hot cells and associated equipment.

Located North of the Hot Cell Access Area, essentially below the B1 level of the Target Hall, are the Target Support Services areas. These areas will be locked out as part of the Target Hall lock up in preparation for moving an irradiated target module. The Radioactive Gas Storage room is below the shielded enclosure for the target modules and contains the hot cell HEPA and charcoal filters, as well as the decay storage tanks for the target station vacuum exhaust. The other area is the Target Pit Service Room that will contain the services for the high power target station (east target) converter.

3.1.4.7 ARIEL – Penthouse

The Penthouse houses HVAC services including the nuclear exhaust, and the building mechanical services. The room at the south end of the penthouse above the Target Preparation Area will house the continuous air monitors for the nuclear exhaust.

ARIEL Facility Safety Report		
Document-51332	Release No. 3	Release Date.: 2015/07/06

3.1.5 Occupancy in ARIEL

Access controlled spaces interlocked to protect from the prompt radiation hazard associated with e-Linac beam operation will be, starting from the south: the Electron Hall; the Beamline Tunnel and its access maze; and the Mass Separator Room. Sufficient shielding is planned for the targets in the Target Pit that occupancy will be allowed in the Target Hall during beam operation. A 100 kW mode of operation for the Electron Hall with beam directed to the beam dump in the NW corner of the hall, is planned for the first phase of ARIEL. In this mode sufficient temporary shielding has been placed around the electron beamline dogleg void in the angled north wall to allow simultaneous e-Linac operation and occupancy in the Tunnel for installing beamline components. Once the beam line is installed in the angled wall and the temporary shielding is removed, the Access Control System will be modified to ensure the tunnel is locked and secured together with the Electron Hall in order to permit beam delivery within the hall. More on this is presented in Chapter 6 on Mitigation of Hazards.

ARIEL Facility Safety Report		
Document-51332	Release No. 3	Release Date.: 2015/07/06

Chapter 4: Accelerator Design

The planned electron linear accelerator is a 500 kW-capable machine to be used as a driver for the production of rare isotope beams by photon-induced fission (photofission). Depending on the target material, rates of up to 10^{13} – 10^{14} fissions per second are expected. The particular emphasis would be on neutron-rich isotopes with low isobaric contamination for nuclear structure physics, and ${}^9\text{Be}(\gamma, p){}^8\text{Li}$ production for β -NMR studies of material properties. The layout of the e-Linac and its attendant equipment gallery is shown in Figure 4-1.

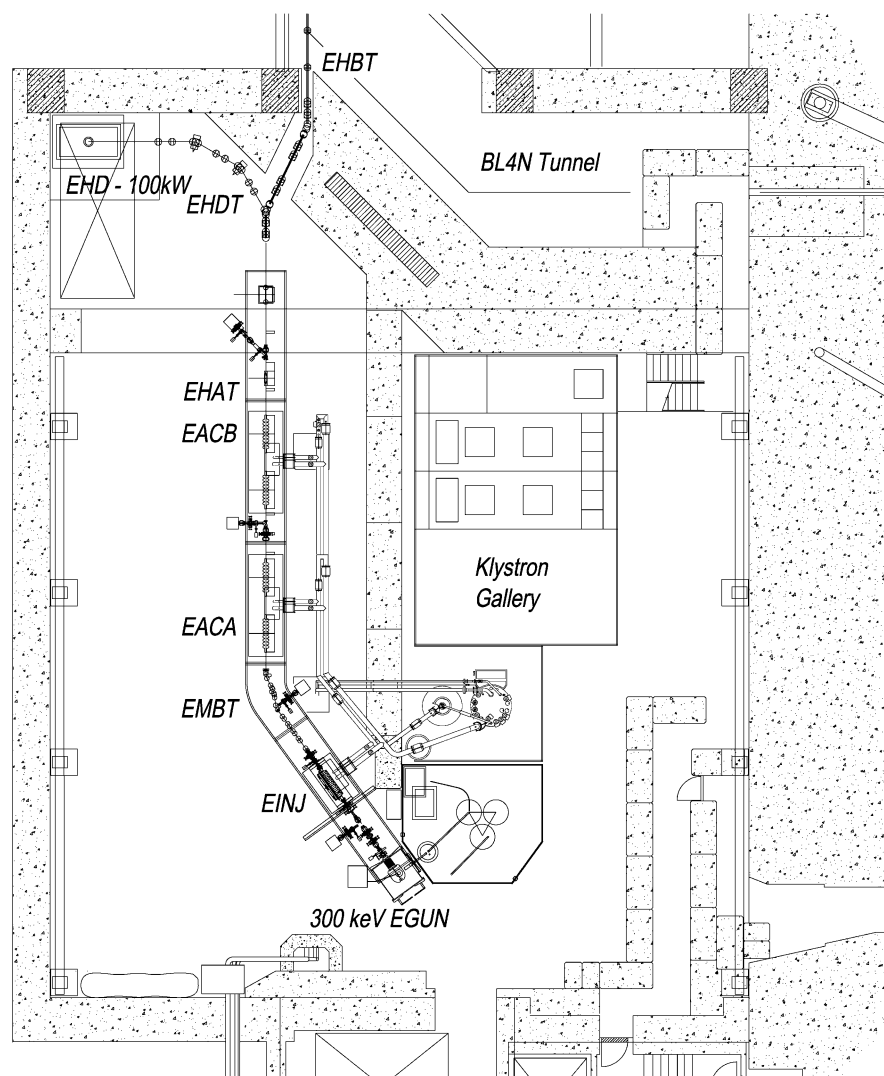


Figure 4-1 E-Linac equipment layout for the Electron Hall. The schematic is at the 264' elevation except for the maze exit in the NE (top right) corner which is at the 284' elevation on top of the

ARIEL Facility Safety Report		
Document-51332	Release No. 3	Release Date.: 2015/07/06

BL4N shielding blocks. [An up to date beamline layout showing the locations of analyzing dumps is included in the Appendix A drawing list.]

4.1 Design

Three main goals have shaped the conceptual design of e-Linac:

- continuous wave (CW) operation at high average power;
- the utilization of existing technology wherever possible; and
- flexibility of operation and configuration.

For a 49 MeV e-Linac, 100% duty factor (CW) operation is inconceivable with normal conducting (i.e. room-temperature) RF cavities: depending on the details of the cavity design, 4–8 MW of wall-plug power would be required in addition to the 0.5 MW of beam power. Using superconducting RF (SRF) technology the wall-plug power, including cryogenic cooling, is less than 2 MW – a dramatic reduction resulting in enormous savings in operational costs. The e-Linac cavity designs are based on existing SRF technology in the GHz range pioneered at DESY and elsewhere. The e-Linac power coupler designs are based on those employed at Cornell University.

A 10 mA beam current and a 10 MV/m accelerating gradient has been chosen as the baseline for the full power machine. This will furnish an electron beam of sufficient intensity at a useful energy for an ISOL type of facility while still relying on conservative design settings for the accelerating gradient.

The e-Linac is being implemented in stages. The nominal specification is to provide up to ~100 kW beam power and beam energy up to 30 MeV in 2016, rising to ~500 kW beam power (10 mA and 49 MeV) with the full implementation of ARIEL II. This aligns the construction and development of the e-Linac with that of the RIB production target stations so as to provide usable beam for the user community at the earliest possible date.

4.2 Staging

The initial e-Linac configuration is a 3 mA, 10 MeV injector cryomodule (EINJ) followed by a single accelerator cryomodule (EACA) providing a nominal beam current of 3.3 mA at 30 MeV. The final configuration will include the injector and two accelerator cryomodules (EACA and EACB) delivering up to 49 MeV electrons with a total beam power on target of 500 kW. While the cryogenic capacity for the final configuration has been installed at the outset, the radio-frequency (RF) power sources driving the accelerator will be added in stages.

The injector comprises a 300 keV electron source (the “e-gun”), a buncher cavity, and the injector cryomodule (EINJ) along with low-energy beam transport (LEBT). Each of the accelerator cryomodules contain two multi-cell RF cavities each capable of increasing the beam energy by nominally 10 MeV. The EINJ and EACs are linked by short medium-energy beam transport (MEBT) sections. The accelerated electron beam is transported by a high-energy beam transport section either to a 100 kW tuning dump in the north-west corner of the Electron Hall (EHDT) or eventually to the

ARIEL Facility Safety Report		
Document-51332	Release No. 3	Release Date.: 2015/07/06

beamline tunnel (EHBT) and transported to the east target station (AETE) in the ARIEL Building. Operation on AETE will be phased and eventually will include a 500 kW converter and target.

4.3 E-linac Major Components

4.3.1 E-Gun

A simple, low-maintenance, 300 kV DC thermionic electron gun is employed to deliver a 10 mA (average) current. The source will output 136 picosecond wide bunches each of 16 pC charge with a bunch repetition rate of 650 MHz. The source consists of a gridded cathode at 300 kV potential separated from an anode at ground by a ceramic insulator. The grid electrode converts the source from diode to triode operation; together with a DC offset the modulation with an RF voltage of the grid causes the gun to be conducting for 16° of the RF cycle allowing a bunched beam to emerge at the anode. The modulation voltage and DC offset are at about 400 V. Additionally low frequency (up to several kHz) pulsing of the beam can be applied by modulating the RF voltage. This allows operation at a lower average power by applying a duty factor to the beam. The source electrodes and ceramic insulator sit in a vessel filled with up to 2 bar of SF₆ gas. The high voltage power supply is located in a locked enclosure or “cage”. The modulation electronics is near ground potential, and the few watts RF power is transmitted via a ceramic waveguide that penetrates through the vessel.

4.3.2 Low-Energy Beam Transport

The e-gun is followed by a LEBT section that uses low field (400 Gauss) solenoid magnets to provide transverse focusing and includes diagnostics to characterize the electron beam and a buncher cavity to shorten the bunches to match the 1.3 GHz RF cavity in the injector cryomodule.

4.3.3 Buncher Cavity

The buncher, a normal conducting RF cavity excited at 1.3 GHz, develops a voltage of 11 kV AC. A reentrant geometry with a 6 cm gap has been adopted. This has two benefits: it provides a transit time factor of 0.75 at $\beta=0.55$ and produces a structure with a high shunt resistance and low ohmic loss. The buncher generates almost no acceleration, but rather imposes an energy modulation from head to tail of the bunch; as a result its power requirements are modest and are met with a 200 W solid-state amplifier.

4.3.4 Injector Cryomodule (EINJ)

The purpose of the EINJ is to accelerate the electron beam to a nominal kinetic energy of 10 MeV. The EINJ contains a single SRF cavity operating at 2 K and 1.3 GHz contained within an insulating cryostat. The cryostat achieves thermal insulation and containment through an insulating vacuum and layers of thermal shielding. The outer layer is cooled to 80 K by liquid nitrogen, and the inner layer to 4 K by liquid helium. The multicell cavity is made from niobium and cooled with liquid helium inside a metal jacket.

The cavity which operates at a nominal gradient of 10 MV/m is similar in design to those developed at DESY for the XFEL but modified for operation at 100% duty factor and lower gradient; and with modified end groups for the input coupler and Higher

ARIEL Facility Safety Report		
Document-51332	Release No. 3	Release Date.: 2015/07/06

Order Modes suppression. The cavity is driven initially by a klystron operating at 100 kW of RF power. This allows operation of the injector to beam currents of 10 mA at 10 MeV.

4.3.5 Medium-Energy Beam Transport (MEBT)

The Injector is followed by the first of two intermediate transport sections: EMBT at 10 MeV and EABT at 30 MeV. Each section is equipped with magnets for focusing and steering, and beam diagnostics for characterization of the electron beam, particularly its energy. The energy measurement will be made in a stub beam line terminating in a shielded high-power Faraday cup (1kW).

4.3.6 Accelerator Cryomodules (EACs)

The purpose of the EACs is to accelerate the 10 MeV electron beam from the EINJ to higher energies. Each EAC provides a nominal energy gain of 19.5 MeV so that the beam will have an energy of 29.5 MeV after EACA and 49 MeV after EACB. The two modules are identical in construction and each consists of two multicell elliptical SRF cavities housed in an insulating cryostat similar to that planned for the EINJ.

The cavities are each 1 m long and made of niobium. Each accelerator cryomodule approaches 4 m in length. The cavities will operate at 2 K and 1.3 GHz with a nominal electric field gradient of 10 MV/m. Thermal shielding and cooling by liquid nitrogen and helium cryogens similar to that in the EINJ has been adopted. Each cavity will supply up to 100 kW of power, generated in a klystron, to the beam.

4.3.7 High-Energy Beam Transport

The EACs are followed by the first of two high energy transport sections. EHDT leads to a 100 kW beam dump used for accelerator tuning. And eventually, EHBT will lead off from EHDT, via a switching magnet, into the Tunnel leading to the RIB production targets located in the ARIEL Target Hall. Transverse focusing in both EHBT sections is provided by a series of DC quadrupole magnets. EHDT and EHBT will be approximately 10 m and 60 m long, respectively, with EHDT lying entirely within the Electron Hall while EHBT lies mostly within the Tunnel as shown in Figure 4-1.

4.3.8 Beam Diagnostics

Between the different types implemented at e-linac, the diagnostics have to measure current, transverse position, profile, and time structure across a variety of physical scales.

Initial electron beam threading through the beamline will be facilitated by profile monitors (a.k.a View Screens, VS). These devices intercept the beam, and produce transverse 2D images that allow determination of beam position and size at their locations. The devices contain either scintillators (less than 10 MeV) or Optical Transition Radiation (OTR) screens (above 10 MeV) and can handle average and instantaneous power of a few Watts; hence they are used at low duty factor. The cameras are triggered synchronously with the pulsing of the electron gun. There are 17 View Screens in the e-hall, and 10 are planned for the ARIEL tunnel.

ARIEL Facility Safety Report		
Document-51332	Release No. 3	Release Date.: 2015/07/06

At power above few W, non-intercepting beam position monitors (BPMs) are used to measure the beam position. Each BPM is essentially four capacitive probes that read out horizontal and vertical position; they also give a relative measure of beam current. These are mated to acquisition electronics that can read beams both with pulsed and C.W. time structure. The BPMs form the backbone diagnostic system. There are 26 units in the e-hall and 28 planned for the tunnel.

At power above a few W, fast wire scanners (FWS) are used to measure beam profile. Unlike the VS, the FWS scan across the beam and so measure profiles rather than provide 2D images. The scan speed is adjustable, and can accommodate beams up to 100kW C.W. Moreover, they may have very large dynamic range such that (in stepping mode) they can resolve “beam halo” when scanned into the tails of the transverse beam intensity distribution. There are a total of four installed in the e-hall, and up to 3 planned for the tunnel.

The beam current is measured in order to quantify beam flux from the source and quantify transport along the beamlines. The beam may be C.W. or repetitively pulsed, and the measurements must cover both. At certain locations, beam intercepting Faraday Cups (FC) are used: up to 1kW in ELBD, up to 1kW in EMBD, up to 100W in EABD, up to 10kW in EHD, and up to 100W in the “in-line beam stops” located in ELBT, EMBT, EHAT and EHBT. Non-intercepting current monitors, capacitive probes (a.k.a. RF shields, RFSH) can be used for pulsed and C.W. over the entire power range from few W to 100kW. These RFSH are not absolute and must be calibrated against an FC. Presently, there are 11 of these devices, but only 3 are instrumented with acquisition electronics. The beam current in the C.W. regime and with long beam pulses (hundreds of ms) will be measured with DC current transformers, which offer high precision and absolute calibration. Presently, one unit is purchased, and is planned to be installed in the EHAT section.

The beam time structure has two scales: pulses from the gun ranging from a few μ s to hundreds of ms; and below the RF structure from ns down to ps. Two broad-band capacitive probes are located in ELBT to resolve the time structure from the thermionic gun from ms down to ns. The individual bunches are much shorter than ns, and hard to resolve with probes. A transverse deflecting mode RF cavity located in the ELBD in combination with a VS is used to measure bunch lengths down to the 10ps level.

4.3.9 Machine Protection System (MPS)

The Machine Protection System (MPS) is necessary for beams above 100W average power. The MPS consists of beam spill monitors and purpose built electronics that will turn off the E-Gun in less than 10 microseconds when a beam spill above threshold is detected. The threshold is 0.1 μ C (of beam) in any 0.1s period. Beam spills are detected using a series of 3m Long Ion Chambers (LIC) along the beam pipe, and scintillators coupled to Photomultiplier Tubes (PMT) located where additional monitoring is required, typically expected to be at the main bending dipoles. The detectors have been tested at the injector linac of the Canadian Light Source in Saskatoon, and have been shown to be satisfactory for the application. ([Document-121169](#)) The MPS provides for a “trip recovery and post-mortem” by enforcing “latch and time stamp” of a variety of equipment. The MPS also interacts with the Control System to determine machine configuration and prevent potentially damaging operation. An operation mode is the combination of a “beam property” (essentially an

ARIEL Facility Safety Report		
Document-51332	Release No. 3	Release Date.: 2015/07/06

accelerated power level) and a “beam path” (a start-through-end in-beamline equipment list). If the selected property is not compatible with path, then the mode is rejected by the control system. The “beam property” values follow a logarithmic scale (i.e. power of 10). For example, all beam-intercepting devices (except appropriately rated dumps) must be withdrawn from the beam pipe for power above 100W C.W.; or 10kW C.W. beam cannot be sent to any dump except EHD.

The machine protection system (MPS) interlocks required to protect the beam dump (EHD) and its associated systems depends on the type of failure and the associated harm which can result. Document-112445 , *List of Interlocks and Alarms for the e-Linac Tuning Dump* specifies all the requirements for 10 kW beam dump operation and indicates others that are foreseen when operation above 10 kW with raster magnets is undertaken. As well as a slow trip which removes the e-Gun enable signal, a hard-wired fast trip is foreseen to prevent damage to the beam dump in the event of a failure of the defocusing quadrupoles.

4.3.10 Operating Envelope Current Monitoring System– RF Shields

Operating within the beam current envelope prescribed in the licensing agreement is essential to personnel and machine safety and is necessary at all times. The licence limit specifies the maximum beam power at a given energy, and the average current limit is the beam power divided by the maximum energy. The maximum current for accelerated beam is limited by at least one calibrated capacitive non-intercepting current monitors (CNIM) in the ELBT and associated threshold electronics that will trip off the e-Gun if limits are exceeded. These CNIMs are known to the EPICS as instrumented RF-shields (RFSH).

The electron beam has a periodic macro-pulse structure with a (constant) in-pulse beam current and an average current which is calculated as the product of the in-pulse current multiplied by the duty factor, the latter can be varied between $\approx 10^{-4}$ and 1. The RF-shield produces a signal that is proportional to the in-pulse current. In order to obtain a current reading the RF-shield must be calibrated against a Faraday cup. Two RF-shields are used for CNIMs; EGUN:RFSH1 immediately downstream of the e-Gun and ELBT:RFSH0 before the bend to ELBD. Both RF-shields are calibrated against the Faraday cup ELBT:FC2 downstream. The calibration is done to the current limit required either by the commissioning licence limits or those defined for a particular beam mode. The beam current limits are defined within a control system interface for the CNIMs. Either exceeding a current limit, or failure of a CNIM will result in removal of the interlock OK signal, turning off the beam at the e-Gun, and inserting Faraday cup ELBT:FC2. A complete description of the system is in *E-Linac Operating Envelope Current Monitoring System* (Document-117036).

4.3.11 RF Power Sources and Distribution

In the final e-Linac configuration, each multicell cavity delivers 100 kW of RF power to the electron beam. Klystrons, very high-gain RF amplifiers, are used to provide this power. These commercially produced devices operate by using a high current (~ 9 A) low energy (~ 60 keV) electron beam to amplify a low-power RF modulation (~ 20 W) to very high power (up to ~ 270 kW). During this process, the klystron electron beam kinetic energy is converted to electromagnetic wave energy and any residual energy is spent in a collector. The conversion efficiency approaches 60% or more.

ARIEL Facility Safety Report		
Document-51332	Release No. 3	Release Date.: 2015/07/06

Each klystron has a DC high voltage (60 kV) cathode, input and output coupling cavities for the RF waves, and a water-cooled anode and is powered by a DC high-voltage power supply and a low-power 1.3 GHz RF source. The two klystrons needed to power four multicell cavities are housed inside the e-Hall; their attendant power supplies are located on the e-Hall roof beams.

Power is transferred from the klystrons to the cavities by means of water-cooled rectangular waveguides a few metres in length coupled to air-cooled coaxial input couplers that penetrate the individual cavities inside each cryomodule. In addition to these main power distribution components, there are splitters to divide the power between the input couplers, and high power circulators and resistive loads to protect the klystron from any reflected power.

4.3.12 Cryogenic System

The purpose of the cryogenic system is to supply 2 K and 4 K liquid helium and 80 K liquid nitrogen to the three e-linac cryomodules. The helium plant is a closed system with negligible losses in normal operation. Liquid nitrogen, on the other hand, is delivered periodically by a commercial vendor and little attempt will be made to recover the evaporated gas.

The helium cryogenic system consists of the following main components:

- a pressurized He gas facility;
- refrigeration to 4K and liquefaction;
- further refrigeration to 2 K;
- sub-atmospheric pumping; and
- purification and impurity control

The main and recovery compressor, He purifier and sub-atmospheric pumps is housed in the Compressor Building South of the Electron Hall. The 100 m³ He gas storage tank is located adjacent to the Compressor building.

Pressurized He gas, at 14 bar, is transferred at ambient temperature (~ 300 K) through piping to the 4 K cold box in the Electron Hall where it is liquefied and collected in the dewar. 4 K liquid He will be divided in vacuum-insulated trunk lines between three cryomodules. Inside each cryomodule a dewar will act as a phase separator where 4 K gas will be drawn off the liquid and further Joule-Thomson expanded to 2 K liquid. An array sub-atmospheric pumps installed in the compressor building allows phase separation to support the 2K liquid helium bath that cools the RF cavities.

In practice, the cryoplant is more complicated than this brief description for two reasons: both the 2 K and 4 K He “spent” gas is used in heat exchangers to pre-cool inflowing gas before flowing out for recompression, and an 80 K liquid nitrogen is used both to pre-cool the helium and to cool directly the outer thermal shields of the cryomodules. Used nitrogen is warmed up in the ambient vaporizer and exhausted to the atmosphere outside the MAB.

ARIEL Facility Safety Report		
Document-51332	Release No. 3	Release Date.: 2015/07/06

4.3.13 Vacuum System

The vacuum system for the e-Linac beamline is divided into three parts with different requirements and volumes: a 5 m long source area operated at 10^{-9} Torr, a 15 m accelerator section composed of the cryomodules (at approx. 10^{-11} Torr) inter-connected by short beam lines at 10^{-8} Torr, and the 10 m and 60 m long respectively, EHDT and EHBT beam lines operated at 10^{-7} Torr. These requirements are standard ultra-high vacuum (UHV) practice at accelerator laboratories. The UHV is brought to the nominal pressure in successive steps: followed by a turbo pump to achieve high vacuum; and lastly by ion pumps to reach the UHV required for operation. The scroll pump exhaust for the dump section is directed to the HEPA filtered exhaust from the e-Hall. The ion pumps are self-contained and are regenerated periodically.

A 50 mm diameter vacuum pipe size has been chosen for the HEBT sections based on molecular conductance and the need to keep beam halo losses small. The vacuum pressure in these regions will be consistent with a total fractional beam loss, from residual gas scattering, summed over the entire beamline length below the 10^{-6} level.

4.3.14 Electrical Services

The dominant electrical loads are the high-power RF and cryogenic systems, magnet power supplies, and vacuum systems. Additional loads include controls, diagnostics, lighting, ventilation systems, water cooling pumps, and similar systems. In order to meet this increase in capacity, a new electrical services package was added to augment and upgrade the existing site capability consistent with an electron beam power up to 500 kW, and the usual engineering margins. Electrical service is provided by a hierarchical branched system starting with a tap from the 12.5 kV switchgear in the MAB Service Annex. From this point, the voltage is stepped down to 480 V and 208 V and distributed via breakout panels to e-Linac equipment loads. In the event of an interruption to site power, key linac components will receive power from a back-up diesel generator and uninterruptible power supply (UPS).

4.3.15 Control System

The ARIEL Control System software is based on the Engineering, Physics, and Industrial Control System (EPICS) toolkit, a multi-laboratory initiative to standardize and share controls device standards, protocols and software. Software is deployed in accordance with TRIUMF Quality Management System practice, and uses in-house software tools to ensure accuracy of software configuration and tracking of software versioning and history.

The hardware includes a combination of commercial, in-house, and partner laboratory designs, and includes Programmable Logic Controllers (PLCs), a VMEbus based CPU and IO hardware, dedicated control system networking (especially CANbus) apparatus, and commodity CPU and networking apparatus.

The control system hardware is based on standards employed and evolving since the beginning of the ISAC project in 1995.

ARIEL Facility Safety Report		
Document-51332	Release No. 3	Release Date.: 2015/07/06

4.3.16 100 kW Beam Dump (EHD) Design & Services

The 100 kW dump is located in the NW corner of the Electron Hall. The roof slab above the dump at the 284' elevation contains a hatch with removable shielding blocks in order to allow access to the dump with the Main Accelerator Building (MAB) crane. This crane can be used to unstack the dump shielding from the top so that the dump can be extracted and placed in a shielded flask for transfer to the Remote Handling work area at the east end of the MAB. The beam dump is cooled via a dedicated High Active Low Conductivity Water package (HA-LCW) which is in turn cooled by the Low Active – LCW (LA-LCW). The water package is located at the north end of the service tunnel at the B3 level. It has a separate surge tank to minimize the contact with air in the primary loop and keep the water conductivity low. A containment tray with a water sensor is used around the water package and a separate one around the connections and dump insert to contain water spills. The vent from the water package surge tank and that from the vacuum exhaust for the dump is piped separately into the filtered nuclear exhaust for the e-Hall.

Beam Dump Design and Protection

From the start it was realized that at full power (100kW) the electron beam would need to be rastered in order to reduce the power density on the incident plate for the beam dump. In addition, the incident plate was inclined at a shallow angle to the direction of the beam to allow a large area for heat transfer and to bring the cooling water close to the incident plate beam surface and provide efficient heat removal and limit the plate's temperature rise. Two rastering magnets immediately upstream of the beam dump are planned. An analysis was carried out to optimize the beam dump incident plate dimensions and angle as well as the rastering magnet frequencies and phases in both transverse directions. This study considered the full range of incident energies and is captured in [TRI-DN-13-03](#), *Preliminary Design of Target/Cooling Plate and Raster Pattern for a 100 kW Electron Beam Dump at 25-75 MeV*.

A quadrant monitor immediately upstream of the tuning dump is planned in order to protect the dump from damage in the event of a rastering magnet failure. The monitor will measure the beam halo current and comprise four quadrants. It will : i) initiate a fast beam trip upon understeering, a loss of rastering, or upon oversteering by the raster magnets; and ii) verify the distribution of the beam into all four quadrants. In addition two downstream beam properties monitors will be used to supplement the sensor capability. Design considerations are captured in [TRI-DN-13-24](#), *Design considerations for quadrant monitor for e-Linac 100 kW electron beam dump*.

4.4 Building Services

4.4.1 Electron Hall Building Services

The Electron Hall an air handling unit and the exhaust fan are both located on the roof of the Main Accelerator Building (MAB). The exhaust blower has a variable frequency drive and is rated at 3000 l/s with a 3.5" water column of back pressure to simulate the impedance of dirty HEPA filters. The exhaust duct for the fan is in the northeast corner of the hall.

Cooling water for the E-linac beam line components and the ancillary equipment in the klystron gallery is supplied as part of the low-active cooling water system (LA-

ARIEL Facility Safety Report		
Document-51332	Release No. 3	Release Date.: 2015/07/06

LCW) in the Main Accelerator Building. The 100 kW beam dump will have a separate high active cooling water package as described in Section 4.3.16 with a heat exchanger that is also cooled by the LA-LCW system.

4.4.2 ARIEL Building Services

These will be described in greater detail with the next revision of the Safety Report that will include target operation.

4.5 E-linac Control Room & Human Factors Engineering

The e-Linac Control Room for the commissioning phase is located in the Service Annex Room 103A, about 15 metres down the hall from the Main Control Room.

There are plans to eventually amalgamate all accelerator control rooms into one control centre, and the earliest this would occur is the second phase of ARIEL.

ARIEL will follow the same processes for beam delivery and maintenance as those already used for existing accelerator facilities and described in [TSOP-11 Operations Management](#).

A Human Factors Engineering Program Plan (HFEPP) has been released (Document – 108553) for the design of the e-Linac Control Room (ELCR). The plan addresses the technical considerations for human-machine interface in the control room environment and identifies the methods by which verification will be carried out to ensure compliance with known standards and validation exercises will be completed to assess human factor engineering performance. It was devised by completing a task analysis and comparing it with that for the ISAC Control Room, as both control rooms are similar from an operational stand point. Areas where operation of the accelerators differ were identified and these received a complete review for human factors design. Input and operational experience was also solicited from system experts.

The HFEPP identified both verification and validation processes to be followed and these are further described in the Human Factors Verification and Validation Plan for the ARIEL E-Linac Control Room (Document-109159). The verification process for the ELCR design was based on that completed for the ISAC Control Room. It examines the physical working environment, the human-machine interface for control of the accelerator, components and safety systems and compares the design to accepted standards for human factors. Validation of the design will be accomplished with a written questionnaire to survey and obtain feedback from the ELCR users. In addition, validation exercises will involve observing the completion of different operational scenarios in the ELCR. A report will be written capturing the outcome of the verification and validation processes.

Both the HFEPP and the HFV&VP documents have been reviewed by CNSC and their feedback and comments have been incorporated.

ARIEL Facility Safety Report		
Document-51332	Release No. 3	Release Date.: 2015/07/06

Chapter 5: Hazard Analysis

5.1 Electron Linear Accelerator Radiation Hazards

Prompt radiation from the electron accelerator comes from losses of the electron beam striking beam apertures; from x-rays from the RF-HV of the accelerating cavities; and from fields from the activation of air and cooling water.

Residual radiation fields are significantly less than the prompt fields and are mostly associated with areas of high beam loss such as the beam dump. These components are typically shielded and residual fields are only of concern when the shielding is removed.

5.1.1 Prompt Radiation – Photons

Energetic electrons incident on a target produce energetic photons called bremsstrahlung, or “braking” radiation. The emission of photons is a result of the conservation of energy that occurs when the relatively light electron is deflected and decelerated in the vicinity of the electromagnetic field of the target nucleus. Bremsstrahlung radiation is the dominant secondary radiation associated with energetic electrons.

The bremsstrahlung cross-section scales with Z^2 of the target nucleus and with increasing incident electron energy, E_0 . At energies below 1 MeV, electrons lose most of their energy through direct ionization of the target material. At higher energies radiative losses, i.e. bremsstrahlung, dominate. The critical energy (E_C) is defined for a given target material as the electron energy at which the energy loss from ionization is equal to that from radiation, and is given by the following expression:

$$E_C = \frac{800}{Z+1.2} \text{ MeV}.$$

The critical energy for some standard materials such as aluminum, copper and lead is 51.0, 24.8 and 9.5 MeV respectively.

The interaction of high energy photons with matter is dominated by pair production, from which electrons and positron in turn generate lower energy bremsstrahlung resulting in an electromagnetic shower. The production of bremsstrahlung therefore results in a continuous energy spectrum which peaks at $\sim 0.3E_0$ and diminishes down to zero at the incident electron beam energy, E_0 . For electron energies above a few MeV bremsstrahlung radiation is significantly forward peaked. The half-width of the angular distribution, $\theta_{1/2}$, is described by the following equation:

$$E_0 \times \theta_{1/2} = 100 \text{ MeV} \cdot \text{degrees}.$$

The photon spectrum in the forward direction is higher energy than in the lateral direction. These properties are important considerations when designing shielding for the accelerator.

The IAEA TRS188 report on the ‘*Radiological Safety Aspects of the Operation of Electron Linear Accelerators*’ provides some rules of thumb for bremsstrahlung dose rates from worst case thick targets. The absorbed dose rate at 0° for electrons above 20 MeV striking a thick high Z target is given to within a factor of two by:

ARIEL Facility Safety Report		
Document-51332	Release No. 3	Release Date.: 2015/07/06

$$H(\text{Gy} \cdot \text{m}^2 / \text{hr} \cdot \text{kW}) = 300 \cdot E_0$$

For the proposed ARIEL 500 kW, 49 MeV e-Linac, this works out to a worst case unshielded dose rate at one meter in the forward direction of:

$$H_0(0^\circ) = 1.5 \times 10^4 \text{ Gy} \cdot \text{m}^2 / \text{hr} \cdot \text{kW} \times 500 = 7.5 \times 10^6 \text{ Gy/hr}$$

TRS188 also provides an estimate for the dose rate laterally for the most penetrating bremsstrahlung component of:

$$H_0(90^\circ) = 50 \text{ Gy} \cdot \text{m}^2 / \text{hr} \cdot \text{kW} \times 500 = 2.5 \times 10^4 \text{ Gy/hr}$$

The angular distribution in the forward direction for 50 MeV electrons striking a thick high Z target is shown in Figure 5-1 and is taken from data in the NCRP51 Report *Radiation Protection Guidelines for 0.1 – 100 MeV Particle Accelerator Facilities*.

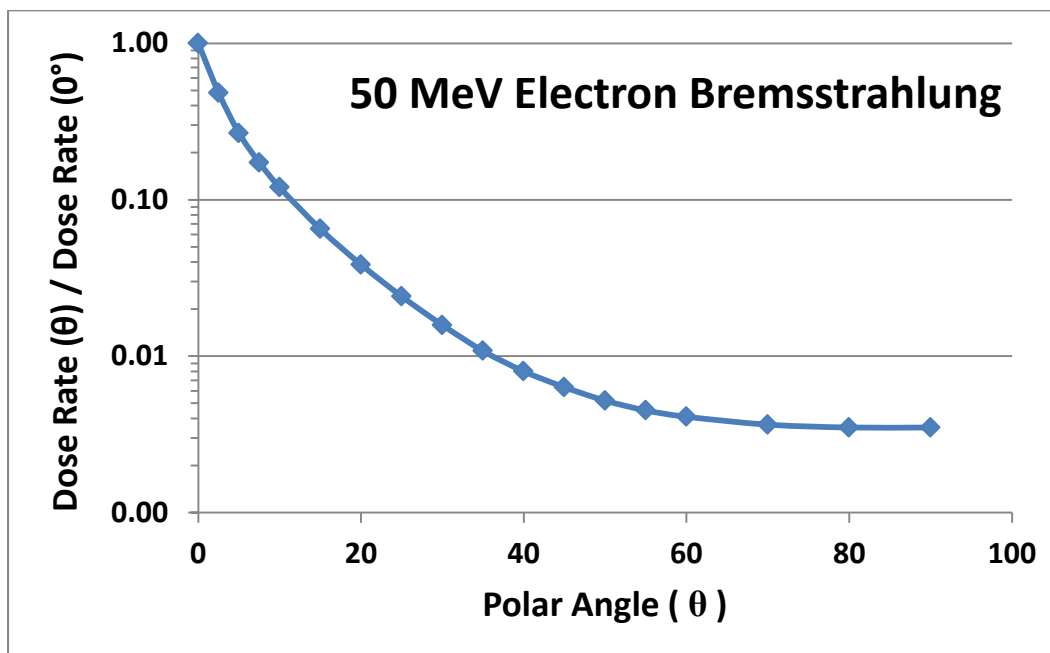


Figure 5-1 Bremsstrahlung dose rate angular distribution normalized to 0° for electrons striking a thick high Z target.

X-rays from the RF cavities will also contribute to the prompt radiation field. Dose rates have been measured for these higher gradient cavities by the TRIUMF SRF group. At a gradient of 10.4 MV/m quiescent dose rates at 30 mSv/hr at 0.3 m are observed and during cavity and coupler conditioning when multipacting can occur, dose rates up to 400 mSv/hr at 0.3 m have been measured. Nevertheless, at the ten meter distance of the overhead roof beams in the e-Hall, the additional contribution to the overall prompt radiation fields from these X-ray fields will be negligible.

5.1.2 Prompt Radiation – Neutrons

Photons of energies in excess of 7-10 MeV when interacting with material will produce neutrons. At photon energies less than 50 MeV the dominant photo-neutron

ARIEL Facility Safety Report		
Document-51332	Release No. 3	Release Date.: 2015/07/06

production mechanism is the giant dipole resonance (GDR), an excited state of the nucleus comprising an oscillation of protons and neutrons which can result in the emission of a neutron. The GDR neutron spectrum is spatially isotropic and has a Maxwellian energy distribution, with most of the spectrum for high Z targets below a few MeV. At higher electron energies quasi-deuteron scattering can give rise to a harder neutron spectrum, however below 50 MeV this production mechanism is considerably suppressed. For heavier nuclei such as uranium there is an additional neutron production component from photo-fission.

The neutron production yield grows from threshold at 7-10 MeV and for most materials saturates at about 35-50 MeV incident electron energy. The saturation yield is higher for higher Z materials. TRS188 lists approximate neutron yields for 100 MeV electrons on thick targets of aluminum, copper and lead of 0.5, 1.0 and $1.8 \times 10^{12} \text{ n/sec} \cdot \text{kW}$ respectively. The yield for uranium includes fission neutrons and is larger by about a factor of two at $3.9 \times 10^{12} \text{ n/sec} \cdot \text{kW}$.

5.1.3 Air Activation for the Electron Hall

Air activation is produced by bremsstrahlung radiation, resulting from chronic losses along the electron linear accelerator, incident on constituent air nuclei in the electron hall. A maximum value for the chronic beam loss is 10^{-5} per meter (5 watts/m) which for an approximate ten meter length in the hall amounts to 10^{-4} of the total power, or a 50 watt loss, or 1 uA at 50 MeV. This is a worst case as the highest operating beam loss, based on experience at other electron accelerator laboratories, is expected to be at least one order of magnitude less than this level, and typical quiescent operating losses would be two orders of magnitude lower than this worst case level. The 100 kW beam dump shielding has been designed to contribute less than 10% of the highest operating loss, and therefore will not add significantly to air activation from this worst case chronic loss.

The saturation air activation production rate for an electron beam stopping on a thick high Z target from TRS188 is shown in column 3 of Table 5-1 for the long-lived air activation products. Except for Ar-41 which is produced by neutron capture on Ar-40, the production mechanisms are photo-nucleon and photo-spallation reactions. The values are per meter path length of bremsstrahlung in the electron hall. For the electron-hall the saturation air activity production rate can be calculated using a mean path length of ten meters and a total chronic power loss of 50 Watts or 0.05 kW.

Table 5-1 Air activation for a chronic beam loss in the Electron Hall

Isotope	T _{1/2} (sec)	Saturation Activity (Bq/kw-m)	Derived Air Concentration (Bq/m3)	Equilibrium Activity Concentration (DAC)	Derived Release Limit (TBq)	Release Activity (DRL fraction)
H-3	3.88E+08	5.00E+06	1.34E+06	2.72E-09	1.32E+05	1.07E-12
Be-7	4.58E+06	1.00E+06	1.67E+05	3.71E-07	7.53E+02	3.17E-09
C-11	1.20E+03	1.00E+07	5.68E+04	1.35E-02	6.07E+03	4.87E-06
N-13	5.94E+02	1.00E+08	5.67E+04	1.62E-01	7.53E+03	4.70E-05

ARIEL Facility Safety Report		
Document-51332	Release No. 3	Release Date.: 2015/07/06

O-15	1.20E+02	5.60E+07	5.66E+04	1.07E-01	1.46E+04	1.60E-05
Cl-38	2.22E+03	2.20E+05	3.53E+04	3.75E-04	3.39E+03	1.50E-07
Cl-39	3.30E+03	1.50E+06	3.81E+04	1.93E-03	3.48E+03	8.13E-07
Ar-41	6.59E+03	1.78E-03 ³	4.27E+04	2.52E-06	4.40E+03	9.43E-10
Total				2.85E-01		6.88E-05

The equilibrium concentration air activity can be calculated by taking into account the production and removal rates. The production rate, C_0 , is given by

$$C_0 = A_{sat} \times P \times L \times 1/V$$

where

A_{sat} = saturation activity in Bq/kW-m

P = beam power (0.05 kW)

L = average path length of photons in the hall (10m), and

V = room volume (4400 m³).

The Electron Hall dimensions assumed for estimating the air activity are an 8.4m height by 22m length and 24m width for a total volume of 4.4×10^3 m³. The exit of EACB is 6.5 m from the north wall, and taken together with a distance from beam height to the underside of the roof beam of 7.7m, yields a path length from the hypotenuse of ~10m. This distance is also appropriate laterally since the effect of the north-south wall limits the extent of the direct photon path in the hall which is otherwise ± 12 m.

Using n to represent the number of radioactive atoms per unit volume, the removal rate is made up of the decay rate, λn , and the loss rate through ventilation, Rn/V , where R/V is the exhaust rate in room exchange per unit time.

At equilibrium, the loss rate from decay and removal is equal to the production rate and

$$\lambda n + \frac{Rn}{V} = C_0$$

The equilibrium activity concentration, C_{eq} , is then

$$C_{eq} = \lambda n = \frac{\lambda C_0}{\lambda + R/V}$$

The equilibrium concentration for the different isotopes in units of derived air concentration is shown in the right graph in Figure 5-2 as a function of the ventilation rate. In the limit of very few air changes the equilibrium concentration for all air activation products is expected to be about 0.3 Derived Air Concentration (DAC), with the dominant contributions coming from N-13 (9.9 min) and O-15 (2.0 min). The fifth column in Table 5-1 shows equilibrium concentrations in DAC units assuming one hall volume change per hour.

³ The Ar-41 saturation activity is in units of Bq/kW-cc.
20150820 173500 Template: Document-31139 Rel.1

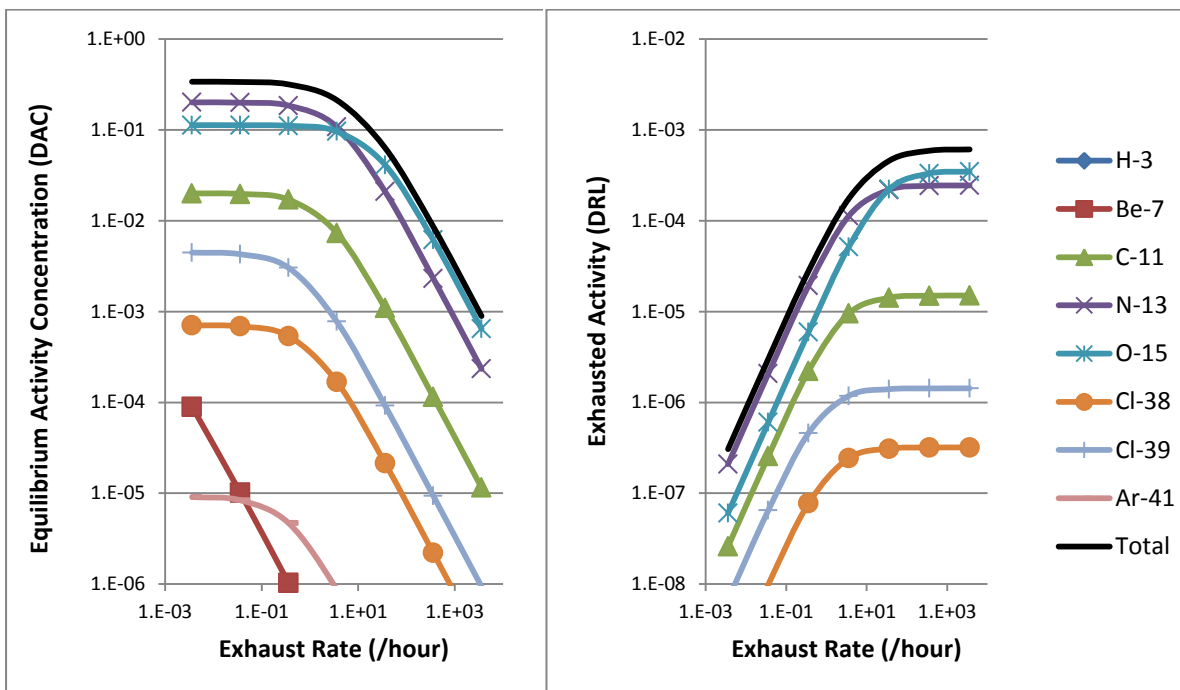


Figure 5-2 Equilibrium airborne activity concentration in DAC and total exhausted airborne activity in DRL as a function of Electron Hall exhaust rate.

The exhausted air activation can also be calculated as a function of the Derived Release Limit (DRL) for the site. Figure 5-2 shows the contribution of air activation products as a function of the exhaust rate. The level of releases at high ventilation rates saturate at 0.1% DRL, or about one tenth of the current site emissions. The exhausted activity for the planned ventilation rate of one volume change per hour are shown in the last column of Table 5-1 and total to less than 0.1% DRL.

Air activation was also examined using FLUKA for a 50 MeV electron beam on a 10 cm copper target in the center of the electron hall. The FLUKA saturation concentrations obtained were 10-20% of the worst case values from that obtained from the TRS188 values used in Table 5-1. The above estimates can therefore be considered conservative.

5.1.4 Residual Radiation & Activation

Residual radiation results from activation products from photonuclear reactions in components in the proximity of high bremsstrahlung fields. The residual radiation fields are anticipated to be highest for the beam dump which is heavily shielded to reduce prompt radiation fields, and which will only be exposed during maintenance.

The 100 kW dump in the Electron Hall consists of a water-cooled aluminum insert surrounded by a 10 cm thick lead shield followed by layers of steel and concrete. The shielding and simulations are described in detail in Chapter 6. Residual activation and dose rate information was also extracted from the simulations carried out for the shielding.

ARIEL Facility Safety Report		
Document-51332	Release No. 3	Release Date.: 2015/07/06

For 75 MeV⁴ electrons about three quarters of the 100 kW beam power is deposited in the aluminum and will contribute to activation. The anticipated long term operating scenario to the dump is one month per year for 20 years. Such a scenario, was used in a Monte Carlo simulation to generate residual dose rates that personnel would be exposed to when changing out the beam dump. The dominant activation species in the aluminum alloy (Al-6061) are H-3, and Na-22 from aluminum and V-48 and 49, Cr-51, Mn-54, Fe-55, Co-58 and Zn-65 from the trace quantities of iron, manganese, zinc and other elements. The dose rate at 6 m from the uncovered beam dump insert and the remaining surrounding shielding are shown in Figure 5-3. After 1 week decay the dose rate is 0.5 mSv/hr and is dominated by the dump insert activation products. A shielded hatch is located above the shielded dump and provides access with the MAB overhead crane for removing the dump insert. The crane will be used to place the dump insert in a shielded flask for transportation to the Remote Handling Hot Cell at the east end of the Main Accelerator Building for repair or replacement as required.

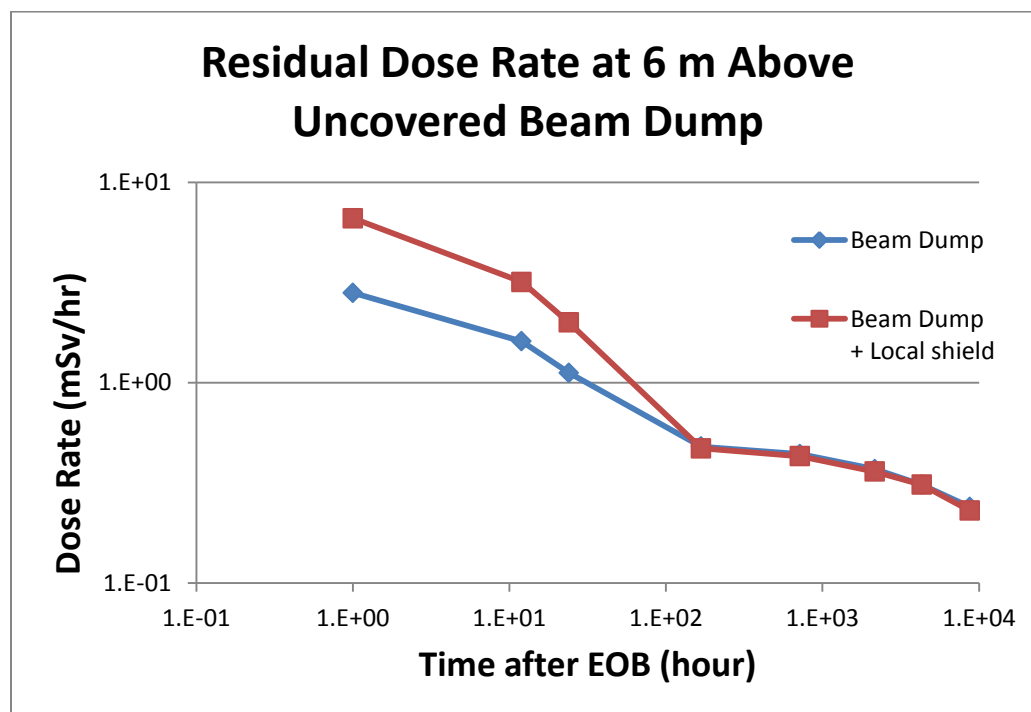


Figure 5-3 Dose rate at 6 m above the uncovered 100 kW beam dump as a function of time after the end of bombardment (EOB). The irradiation profile assumes twenty years of irradiation for 1 month annually with 1.33 mA, 75 MeV electrons..

Residual fields from water activation also need to be considered. The cooling water package resides at the north end of the West Service Tunnel below the e-Hall. The beam dump simulation showed that at lowest beam energies (25 MeV) one could expect up to 20% of the 100 kW beam power to be deposited in the water. The dose rate from the water package after two months of continuous operation is shown in

⁴ Although the e-Linac is being licensed as a Class II facility (i.e. E<50 MeV), in future with an energy recovery loop, the machine could operate up to 75 MeV. Therefore the studies for the beam dump have included energies up to 75 MeV.

ARIEL Facility Safety Report		
Document-51332	Release No. 3	Release Date.: 2015/07/06

Figure 5-4. [N.b. Two months of continuous operation, rather than 1 month for 20 years used for the dump insert, provides a worst case to the nominal 1 month annual operation as there are no long-lived activation products that can build up and contribute significantly to the dose for water activation.] The production cross sections used are from the FLUKA simulation for 75 MeV electrons and the total worst case deposited cooling water power of 20 kW associated with the low energy 25 MeV electron operation, was used. In as much, this represents a worst case activation level for the 100 kW water package. Most of the water activation products are short lived, and the dose rate from the water package after 6 hours, when most of the C-11 ($T_{1/2}=20\text{min.}$) has decayed away, is dominated by Be-7 and is 2 $\mu\text{Sv/hr}$ at one meter. The total tritium content after two months of irradiation is 0.25 GBq, or less than a percent of the tritium activity produced in the 500 MeV proton water packages. The high active water will be released to the MAB Service Annex active sump annually to limit the build up of tritium in the water package.

Lastly, residual radiation dose rates for beamline components that are subject to chronic beam losses (5 watts/meter) are expected to be modest, at $\sim 10\text{-}20 \mu\text{Sv/hr}$ at half a meter.

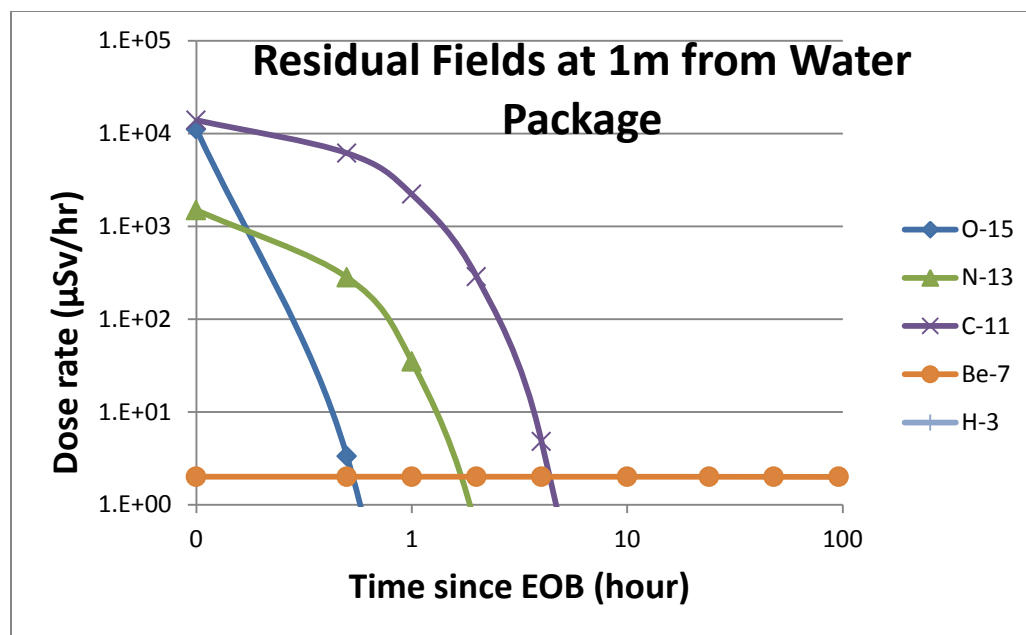


Figure 5-4 The dose rate at 1 m from the 100 kW water package as a function of time after the end of two months of bombardment (EOB)..

5.2 Non-radiological Hazards

5.2.1 Seismic Hazard

The Electron Hall occupies the below-grade western portion of the existing Accelerator Building, with a link to the new ARIEL facility via tunnel. The existing below-grade Accelerator Building structure is reinforced concrete, with a thick raft slab and thick side walls. The Accelerator Building was constructed in 1970 and designed to the applicable codes and standards of that time. The new works to create the

ARIEL Facility Safety Report		
Document-51332	Release No. 3	Release Date.: 2015/07/06

Electron Hall constitute a renovation to the existing building. The new works do not degrade the seismic performance of the existing building, but they also do not form a seismic upgrade to the existing building.

Structural and seismic analysis and design of the new structures within the Electron Hall complies with seismic provisions of BCBC 2006 (which is adopted from NBCC 2005) as well as the UBC Technical Guidelines (which refer to BCBC 2006). The new structures are designed for seismic loads and provisions corresponding to a Normal Importance building. Non-structural components and parts and portions of the building are designed and suitably restrained for seismic forces in accordance with Clause 4.18.17 of BCBC 2006. The new structures within the Electron Hall include mass concrete shielding wall and suspended slab elements. These are sufficiently strong that they are not expected to yield during the design earthquake as defined below. These elements are connected to the existing building by epoxy adhesive doweled reinforcing connections, so as to prevent sliding or overturning during the design earthquake. The existing 25mm structural gap along the East side of the Electron Hall (Gridline 4) has been respected and maintained with the new construction.

5.2.2 Conventional Electrical Hazards

Conventional electrical hazards include both high voltage and high current AC and DC power. The major source of AC power is a 10MW, 12.5 kV electrical distribution system. Electrical hazards during installation and operation will be mitigated by strict compliance with both the Canadian and BC Electrical Codes as well as the WorkSafe BC requirements. Installations are inspected by the site electrical engineer who has responsibility for ensuring compliance with the BC Electrical Code.

All work carried out on electrical systems must comply with the TRIUMF electrical safety requirements as described in the following TRIUMF Safety Notes (TSN): [TSN 5.8 - Electrical Safety at TRIUMF](#), [TSN 5.11 - High Voltage Safety](#), and [TSN 1.3 - TRIUMF Lock-out Policy and Procedures](#).

The high voltage supply for the 300 kV electron gun is enclosed in a high voltage cage. The high voltage supply is one of the beam inhibit devices for the e-Hall Access Control System. The engineered safety features incorporated into the design consist of the access control interlocks, disconnection of the supply power, and equipment for grounding the terminal before access to the cage.

5.2.3 Ozone Production

Under normal operation, at all times during acceleration and transport the electron beam is contained within the vacuum envelope. Therefore the only potential for production of ozone during normal operation comes from the chronic beam losses which give rise to bremsstrahlung radiation. As described in Section 5.1.3, the total worst case chronic beam loss is expected to be $1: 10^{-4}$, or 1 microampere. A worst case estimate for the ozone production is to assume that the electron beam loss directly ionizes the air. There are also loss mechanisms that need to be taken into account in order to arrive at a saturation quantity. Following the formalism laid out in

ARIEL Facility Safety Report		
Document-51332	Release No. 3	Release Date.: 2015/07/06

NCRP144 and the references therein, the rate of change of the ozone concentration in air is given by

$$\frac{dn}{dt} = gI - \alpha n - \kappa I n - \frac{R}{V} n, \text{ where}$$

g = # ozone molecules produced per eV (= 0.103/ eV)

I = ionization energy deposited (eV / m³-sec)

α = rate of decomposition of ozone molecules (/sec)

κ = # of ozone molecules destroyed per unit energy and concentration n (eV⁻¹m³) and

$\frac{R}{V}$ = the room ventilation rate (sec⁻¹).

The solution to this equation is

$$n(t) = n_{SAT} [1 - e^{-(\alpha + \kappa I + R/V)t}].$$

For a long irradiation time the concentration reaches saturation

$$n_{SAT} = \frac{gI}{\alpha + \kappa I + R/V}.$$

Using the chronic beam loss current and the electron ionization in air ($\mu_{coll} = 2 \text{ MeV} \cdot \text{cm}^2/\text{g}$) one obtains

$$I = \mu_{coll} \rho \frac{L}{V} i_{chronic}$$

where ρ is the air density and L/V is the path length in air divided by the room volume. Using 10 m for the path length and 2000 m³ for the volume yields

$$I = 7.85 \times 10^{14} \text{ eV/sec} \cdot \text{m}^3.$$

Conservative values for the rates of decomposition are $= 2.3 \times 10^{-4} \text{ sec}^{-1}$, and $\kappa = 1.4 \times 10^{-22} \text{ eV}^{-1} \text{m}^3$.⁵ Using one e-Hall volume change per hour ($R/V = 2.78 \times 10^{-4}$) as in Section 5.1.3 and plugging in values into the equation above yields an ozone saturation concentration of $3.51 \times 10^{17} \text{ m}^{-3}$. Dividing by the ideal gas molecular oxygen concentration at room temperature and pressure of $6.02 \times 10^{23} \cdot 0.21 / 0.0245 \text{ m}^3$, yields a saturation concentration of 0.068 ppm. This concentration is just below the ozone threshold limit value (TLV= 0.1 ppm) above which remediation measures are recommended. In conclusion, additional remediation measures are not anticipated to be required for ozone production. Sampling will be carried out to confirm the ozone concentration levels.

5.2.4 Radiolysis for the 100 kW Beam Dump

The deposited beam power in the cooling water for the cooled aluminum beam dump can result in radiolysis of the water generating ions and some gases. Experience with the 500 MeV production targets and beam dump has shown that these ionization products can be minimized by maintaining low conductivity for the primary cooling water loop. This is achieved with a closed primary loop that includes an ion-exchange resin that is devoid of water/air boundaries. In addition, the primary loop is connected

⁵ The value given for κ in NCRP144 is in error. The value used here is from the original source is Hoeffert, M. CERN-TIS-RP-175-CF breport, 1986

ARIEL Facility Safety Report		
Document-51332	Release No. 3	Release Date.: 2015/07/06

via a supply line to a secondary surge tank. The capping volume of air atop the water in the surge tank is exhausted to the nuclear exhaust. A similar water package design has been used for the water-cooled 100 kW dump. The 100 kW beam dump system requirements have been captured in [Document-57707](#).

Radiolysis of water occurs when deposited energy from charged particles result in splitting water molecules into free radicals. The average energy per dissociation is ~ 100 keV. Depending on the conditions the free radicals can then form H_2 and O_2 gas in the water which eventually collects in the capping volume at the top of the water package. The production of H_2 gas has been measured for different systems and is between 0.8-3.2 litres H_2 /MegaJoule.⁶ This value will depend on the water purity (high purity reduces the production) and 1.6 litres/MegaJoule is used here. [N.b. NCRP 144 has a value of 0.44 litres/MJ.]

Using 1.6 litres/MJ, and 10 kW of deposited power in the 100 kW dump cooling water results in $(10E-3 \text{ MJ/sec} * 1.6 \text{ litres/MJ} * 3600 \text{ sec/hr})$ 57.6 litres/hour of H_2 gas. The explosive limit for hydrogen gas is 4%. The air volume above the tank will be monitored and the gases vented to the hall exhaust to keep the maximum H_2 gas operating level below 1%. Assuming that none of the H_2 gas remains dissolved the required exhaust flow from the top of the surge tank would be $60 * 100 = 6E3$ litres/hour (100 Lpm). If the release of radioactivity associated with this exhaust is significant the tank capping air volume will need to be recirculated through a catalytic recombiner to remove the H_2 gas.

5.2.5 Thermal Considerations for the Beam Dump

This section addresses the design considerations taken to minimize the risk of damage to the beam dump. These risks do not pose an immediate personnel hazard but any work recovering from a failure would involve exposure to residual radiation fields and/or potential contamination.

100 kW Operation

The raster magnets will paint the beam through a 4 by 4 cm square aperture onto the (aluminum) dump incident plate angled at 3 degrees to the beam direction. The incident instantaneous spot size of 1 mm radius is spread over an ellipse with semi axes 1mm and 19 mm. Through the raster pattern, the beam is painted over a rectangular area roughly 3cm by 80 cm.

The thermal requirement for the dump insert is two-fold: (i) keep the maximum temperature of the cooling water below 90 C to remain well below the boiling point; and (ii) keep the incident aluminum plate temperature of the dump insert, the location where the power density is highest, below 150 C. This design limit provides a margin of 30 C above which material ageing effects can start to affect the material strength of 6061-T6 aluminum.

The thermal analysis was the subject of a design review (Document-104082) where two independent analyses were compared and found to agree within $\approx 10\%$. The maximum temperatures predicted for the beam dump insert at 25 (75) MeV incident electrons was 93 (114) C, with the maximum observed at the beam spot for 25 MeV

⁶ Walz et al. SLAC-PUB-0279 Beam Dumps, Energy Slits and Collimators at SLAC – Final Versions and First Performance Data

ARIEL Facility Safety Report		
Document-51332	Release No. 3	Release Date.: 2015/07/06

and at the lower surface centered along the length for 75 MeV electrons. The highest temperature away from the beam spot at 75 MeV is a result of the larger radiative fraction – 38% at 75 MeV as compared with 17.5% at 25 MeV. Yield stresses were also examined and found to be better than a factor of safety of two of the yield strength for the solid sections and better than a safety factor of three for the weld areas. A one third size prototype was also built to verify procedures for manufacturing and assembly as well as to check the integrity of the weld design through pressure tests and sectioning of the weld.

10 kW Operation

At power levels below 10kW, the dump may be operated without a raster provided that the beam spot size is increased up to 6mm r.m.s. The quadrupoles EHDT:Q5,Q6 and the wire scanner FWS6 are used to adjust and measure the spot size at low duty factor.

It is foreseen to use the beam dump insert at reduced power through the first year of operation. The same beam dump insert will be used for 10 kW operation, except that instead of rastering, the Gaussian beam will be defocused to a size of 1.41 cm FWHM ($\sigma_{rms} = 0.6$ cm) using two quadrupoles upstream of the dump (EHDT:Q5,Q6). A thermal analysis was performed using a uniform cylindrical incident power deposition having the same peak and r.m.s. power density (W/m²) and total power as that of the Gaussian beam shape. The analysis demonstrates that the dump insert and cooling water temperature requirements are satisfied for a Gaussian beam with total power up to 26 kW. The maximum temperature observed (T=119 C) for 26kW and no raster is slightly greater than that for the 100 kW rastered operation. However, the analysis has a comfortable safety factor of more than two for operating the dump at 10 kW: the thermal stress will be lower because at 10kW both the maximum temperature (67 C) and the width of the heated zone are significantly less than at 100 kW. The thermal analysis for the de-rated beam conditions is included in [E-Linac Beam Dump Maximum Un-Rastered Beam Power \(Document-115170\)](#) .

5.2.6 Oxygen Deficiency Hazard

The accelerator superconducting RF cavities are enclosed in three cryomodules that operate at below 4K. A cryomodule consists of an outer enclosure filled with liquid nitrogen (LN₂) and a smaller inner enclosure filled with liquid helium (LHe). The nitrogen boil-off is released to the atmosphere outside the Main Accelerator Building, whilst the helium gas is captured and circulated back to the Compressor Building for recompression. By eliminating the release of all evaporated cryogenic liquid from the hall, a defense in depth approach has been adopted to minimize an oxygen deficiency hazard.

The hazard assessment for oxygen deficiency in the e-Hall and Compressor Building is described elsewhere. ([Document-108576](#)) Table 5-2 summarizes the relevant quantities to assess the oxygen deficiency hazard in these areas, An oxygen deficiency hazard is said to exist when the 20.95% O₂ level normally present in air is depleted to below 18%. The first column includes the type of cryogenic liquid and the area in question. The second column is the volume of the area where personnel could be impacted; a conservative 1.4 m height above the floor for LN₂ since the cool

ARIEL Facility Safety Report		
Document-51332	Release No. 3	Release Date.: 2015/07/06

N2 gas will tend to pool at low elevations, and a 1.4 m depth below the ceiling for LHe in the e-Hall since that is 1 m above the elevation of the exit door and maze. The third column is the air exhaust rate from the area. The fourth column is the volume of cryogenic liquid that when released in the area would result in an OD hazard ($\leq 18\% \text{ O}_2$). The conversion from liquid to gas for LN2 is a factor of 700 and for LHe a factor of 750. The two right-most columns are the amount of liquid cryogen available in the area and the potential supply of cryogenic liquid to the area.

Table 5-2 Cryogenic liquid and gas volumes required to create an oxygen deficiency hazard in the e-Hall and Compressor Building. LN2 is not shaded and LHe is in the shaded rows,

AREA	Volume of Occupied Area ¹ (m ³)	AREA air Exhaust Rate (/hr)	Cryo Liquid Volume Necessary for ODH ² (litre)	Cryo Liquid Available in the AREA ³ (litre)	Cryo Liquid supplied to the AREA ⁴ (litre/hr)
LN2 in e-Hall (B2 Level)	720	1.3	192	330	3000
LHe in e-Hall (284' elevation)	720	1.3	1100	1150	0
LN2 in West Service Tunnel (B3 Level)	67	N/A	13	330	3000
LHe in West Service Tunnel (B3 Level)	67	N/A	12	0.45	0
LN2 in Compressor Bldg.	200	Return	39	50	3000
LHe in Compressor Bldg.	500	Return	93	0.45	3.6

1) Only consider the lower 1.4 m for the relevant volume as cold N2 gas will not mix readily with air. For the LHe include the top 1.4 m below the e-Hall ceiling.

2) Cryogenic liquid volume required to lower the O2 concentration below 18%. Includes the hourly exhaust air rate where applicable.

3) Includes the largest volume of the cryogenic liquid either in the area. In the case of the Service Tunnel, the He from the hall is not included as it will rise in the hall and never penetrate the apertures into the tunnel below the hall.

4) Flow rates into the area are based on the connecting line diameter from the 34000 Litre dewar to the area. As for the LHe it is based on a rupture of a 24 m long pipe carrying 14 bar He gas from the compressor building to the e-Hall and converted to an effective LHe volume for comparison with the ODH volume in column 4. Similarly, the supply for the compressor building is based on 0.75cc-atm/sec He gas flow rate at the compressor converted to an effective cryogenic volume.

ARIEL Facility Safety Report		
Document-51332	Release No. 3	Release Date.: 2015/07/06

A comparison of the cryogenic liquid volumes required in each area to create an oxygen deficiency hazard (column 4) and the volumes and flow rates available in those areas (columns 5 and 6) indicates that for LN2 all the areas in a worst case release have the potential for the oxygen to drop below 18% in the occupied region. Whereas for LHe the service tunnel and the compressor building do not have an oxygen deficiency hazard, and the top of the Electron Hall would only result in a concentration that is marginally below 18% in a worst case scenario. The last column shows the flow rate in effective cryogenic liquid volumes possible in the area. It is important to note that the 3000 litre/hr LN2 flow rate would only be possible if the control valve, on each of the lines, to the e-Hall via the service tunnel and/or the compressor building, failed to shut on an interlock signal from the oxygen deficiency monitor. Details of the engineering controls to limit the hazard are included in Chapter 6.

Lastly, there will be three cubic meter-atm of sulphur hexafluoride (SF₆) in a vessel containing the e-gun high voltage electrodes located at the south end of the Electron Hall. This is a relatively small volume and SF₆, which is heavy compared with air, will tend to migrate to the lowest elevations.

ARIEL Facility Safety Report		
Document-51332	Release No. 3	Release Date.: 2015/07/06

Chapter 6: Mitigation Measures

6.1 Shielding for the Electron Hall

Shielding which is described in this section is the primary level of passive personnel protection from prompt radiation hazard. In addition to shielding, active personnel protection is provided with an access control and radiation monitoring systems which are described in the section 6.2.

6.1.1 Shielding Requirements

Target dose rate limits for the shielding design are governed by *TRIUMF's Policy for Maximum Allowable Dose Rates in Accessible Areas TSN 1.8*. Prompt radiation dose rates outside shielding need to be considered for both normal and abnormal beam loss conditions when designing shielding. The requirements are that:

- under normal operation, for a chronic beam loss, the shielding must be sufficient to limit dose rates in high (low) occupancy areas to 0.5 (10) $\mu\text{Sv/hr}$; and
- under an abnormal or accidental beam loss condition the dose rate be limited to 50 mSv/hr.

The anticipated worst case chronic beam loss for the 500 kW e-Linac is 5 watt/meter which, over a ten meter length of the e-Linac, amounts to 50 watts, or $1: 10^{-4}$ of the full power. When one designs with a safety margin of two and uses a chronic dose rate for low occupancy areas of 5 instead of 10 $\mu\text{Sv/hr}$, the ratio of chronic over accidental loss dose rate limits ($5\mu\text{Sv/hr}/50\text{mSv/hr} = 10^{-4}$) is then equal to the fraction of full power for total chronic losses in the Electron Hall. Therefore using the target dose rate of ≤ 50 mSv/hr for a full accidental loss in designing shielding will provide sufficient shielding to remain below 5 $\mu\text{Sv/hr}$ for chronic losses.

Additional information from other CW electron accelerator laboratories indicate that the above chronic loss level is high and that maximum losses associated with normal operation are expected to be at least an order of magnitude lower. This would then bring the chronic loss dose rate ceiling to 0.5 $\mu\text{Sv/hr}$ in the low occupancy areas, and allow for higher occupancy while still remaining below the annual dose threshold of 1 mSv (2000 hours). There are high occupancy areas located further away from the electron hall and these will have dose rates that are correspondingly lower as well. These low occupancy areas are also examined in the shielding analysis below. An order of magnitude lower dose rate limit means that for an accidental full loss the dose rate should be below 5 mSv/hr.

The above shielding requirements need to take into account both bremsstrahlung photons and the resultant photonuclear neutrons generated by photon interactions with materials in the Electron Hall. The strong forward-peaked bremsstrahlung distribution as compared to the isotropic neutron distribution means that neutrons have the potential to constrain the shielding requirements in the lateral direction. Even then, as will be shown below, with 50 MeV electrons incident on a moderate Z target such as steel or copper, the neutrons contribute less than ten percent of the dose in the lateral direction. Where neutrons become the dominant contributor to

ARIEL Facility Safety Report		
Document-51332	Release No. 3	Release Date.: 2015/07/06

radiation fields outside shielding is at maze openings, as neutron transmission along a maze is superior to that for photons.

A plan view of the 49 MeV, 500 kW electron linear accelerator housed in the Electron Hall is shown in Figure 6-1. The e-Linac consists of a 300 kV electron gun followed by three individual cryomodules that accelerate the beam in stages up to 10 MeV (EINJ), 30 MeV(EACA) and 49 MeV (EACB). Out of the last accelerator cryomodule the beam can be directed either to the 100 kW beam dump or to the tunnel for delivery to a target in the ARIEL target hall.

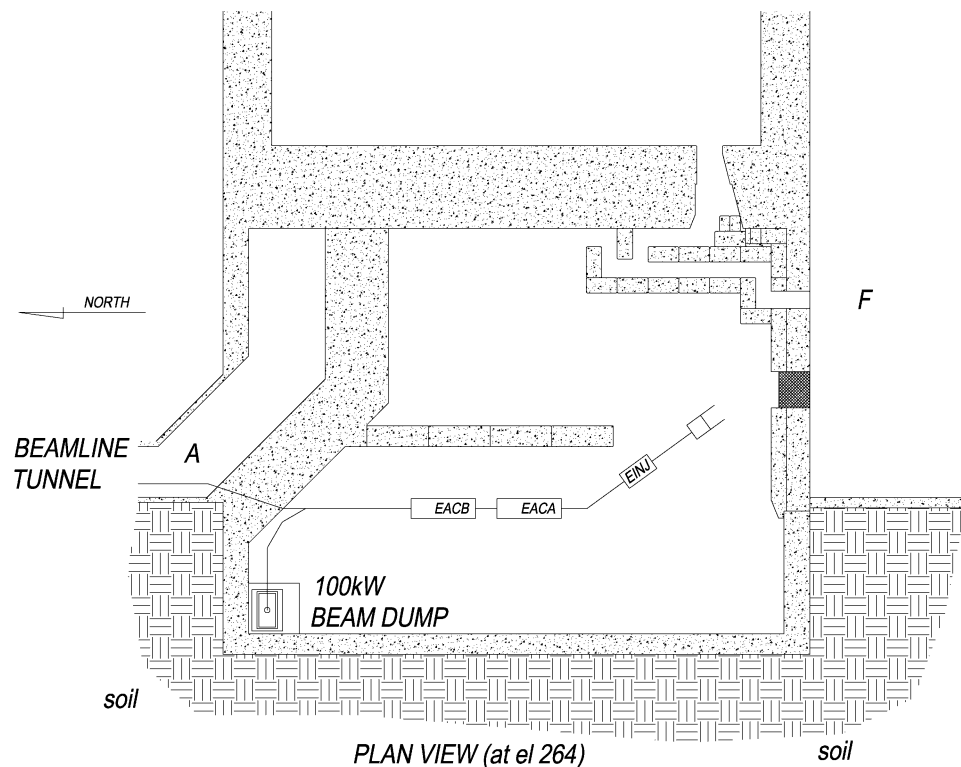


Figure 6-1 Plan view of the e-Linac and the shielding enclosure that makes up the Electron Hall. The inner north-south shielding wall is ten feet tall and provides prompt radiation shielding for the equipment gallery on the east side of the wall. Additional shielding added to the south wall to protect occupants at the B2 level (location F) is also shown.

6.1.2 Photon and Neutron Shielding Requirements

The dose rate outside shielding is given by:

$$H = H_0(\theta) \times 10^{-\left[1 + \frac{(t-TVL_1)}{TVL_n}\right]} \times 1/d^2$$

ARIEL Facility Safety Report		
Document-51332	Release No. 3	Release Date.: 2015/07/06

where $H_0(\theta)$ is the source dose rate at one meter as given in the previous section, t ($> TVL_1$) is the thickness of shielding and d is the total distance to the beam loss point, both in meters and each a function of theta.

The source term dose rates for bremsstrahlung photons at zero and ninety degrees given in the previous chapter and scaled for a chronic loss of 0.05 kW (500 kW $\times 10^{-4}$) are:

$$H_0(0^\circ) = 1.5 \times 10^4 \text{ Gy} \cdot \text{m}^2/\text{hr} \cdot \text{kW} \times 0.05 \text{ kW} = 7.5 \times 10^2 \text{ Gy} \cdot \text{m}^2/\text{hr}.$$

$$H_0(90^\circ) = 50 \text{ Gy} \cdot \text{m}^2/\text{hr} \cdot \text{kW} \times 0.05 \text{ kW} = 2.5 \text{ Gy} \cdot \text{m}^2/\text{hr}.$$

The neutron source term is isotropic and is correspondingly:

$$H_0(0^\circ) = 1.0 \times 10^{12} \text{ n/sec} \cdot \text{kW} \times 0.05 \text{ kW} = 5.0 \times 10^{10} \text{ n/sec}.$$

Attenuation lengths in tenth value layers (TVL) for different shielding materials for bremsstrahlung spectra produced by 50MeV electrons striking a thick, high-Z target are shown in Table 6-1 and were obtained from figures in TRS188 (Fig 46 and 47) and NCRP 51(Appendix E). Concrete has a slightly larger initial TVL than for successive layers and is shown separately in the table. TVLs for shielding in the lateral direction are also included.

Table 6-1 Different material Tenth Value Layer (TVL) thicknesses for 50 MeV electrons incident on a thick, high-Z target

Material	0° -TVL (meter)		90° - TVL (meter)	
	TVL ₁	TVL _n	TVL ₁	TVL _n
Bremsstrahlung photons				
Concrete	0.56	0.49	0.51	0.46
Steel	--	0.11	--	0.11
Lead	--	0.053	--	0.053
Bremsstrahlung neutrons				
Concrete	53.2	36.6	53.2	36.6

TRS188 Fig. 54 data, reproduced in Figure 6-2 below, show the attenuation of neutrons for 55 and 65 MeV electrons incident on various targets as a function of concrete thickness. The abscissa (B_n) is the dose equivalent per incident neutron fluence in units of pSv·cm²/neutron. The neutron attenuation lengths obtained from these data are shown in Table 6-1. The emission of neutrons is isotropic and the attenuation is therefore the same at zero and ninety degrees.

The shielding for the e-Linac was assessed for chronic losses in both the forward and lateral directions. Figure 6-1 shows a plan view and Figure 6-3 an elevation view of the accelerator in the hall.

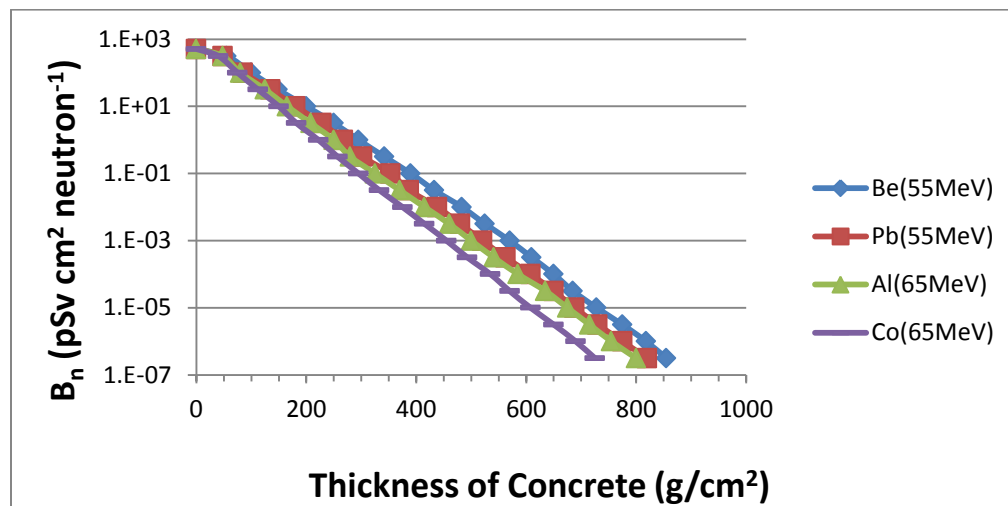



Figure 6-2 Attenuation of neutrons in concrete from different energy electrons impinging on different material targets

The accelerator is housed at the B2 level in the Electron Hall which is largely surrounded by soil to the northwest, west and southwest, and the 5 m thick cyclotron accelerator vault to the east. The only locations for occupancy at the B2 level are in the beam line tunnel directly ahead (Location A) and in the backward direction, Service Annex (Location F in Figure 6-1). In the lateral direction Figure 6-3 shows the locations B, C, D and E which also need to be assessed. Table 6-2 summarizes the relevant distance, concrete shielding thickness, gamma and neutron attenuation as well as the total dose rate for each of these areas.

Table 6-2 attenuation factors for gamma and neutron through the thickness shielding for different locations and the associated dose rates outside shielding

Location	Distance (m)	Concrete Thickness (cm)	Gamma Attenuation	Gamma Dose ($\mu\text{Sv/hr}$)	Neutron Attenuation	Neutron Dose ($\mu\text{Sv/hr}$)	Total Dose ($\mu\text{Sv/hr}$)
A (0°)	4.6	360	6.25E-08	2.22E+00	4.13E-10	1.69E-05	2.22E+00
B (90°)	6.3	180	1.57E-04	1.00E+01	3.43E-05	7.60E-01	1.08E+01
C (90°)	10.2	150	7.04E-04	1.71E+01	2.26E-04	1.90E+00	1.90E+01
D (90°)	24.9	192	8.61E-05	3.47E-01	1.61E-05	2.25E-02	3.70E-01
E1 (90°)	29	340	5.22E-08	1.55E-04	1.45E-09	1.50E-06	1.57E-04
E2 (90°)	33.1	192	8.61E-05	1.96E-01	1.61E-05	1.27E-02	2.09E-01
F (90°)	23.4	240	7.79E-06	3.55E-02	7.86E-07	1.24E-03	3.68E-02
A (90°) (+60 cm)	3.9	255	8.69E-06	1.43E+00	3.06E-07	1.74E-02	1.44E+00

ARIEL Facility Safety Report		
Document-51332	Release No. 3	Release Date.: 2015/07/06

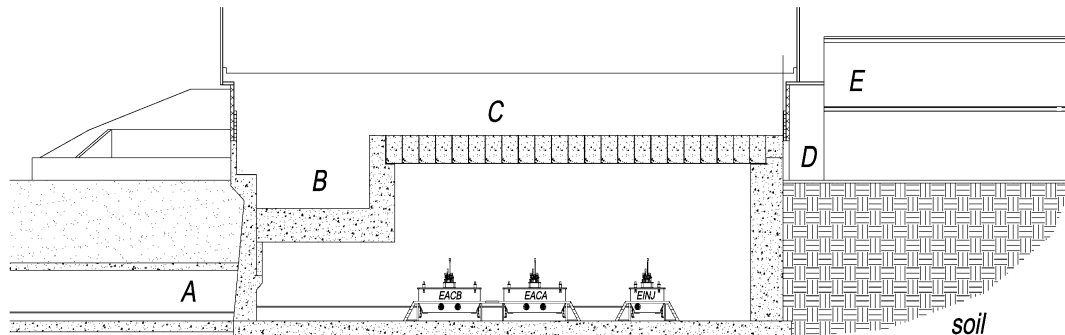

ELEVATION VIEW (LOOKING EAST)


Figure 6-3 Elevation view taken at the accelerator axis looking towards the Cyclotron Vault. The tunnel extending North of the Electron Hall can be seen on the left. The letters refer to locations discussed in the text. This section is to the West of the Service Annex space to the South of the Hall, and as a result shows the soil fill at the B2 and B1 level.

All locations except E are low occupancy areas where the design dose rate limit is 5 $\mu\text{Sv/hr}$ for a chronic loss or 50 mSv/hr for a full point loss. The point kernel method indicates that the dose rate for locations B and C, i.e. the roof beams and the slab, exceed this limit. Location E is an office area and there the design dose rate limit is 0.5 $\mu\text{Sv/hr}$. The table shows the dose rate assessed at the north end of the area (E1) where the shine is through the roof beams, and at the south end of the area where the shine is through the south shielding wall (E2). In both cases the dose rate falls within the limit.

The Monte Carlo analysis described in the next section addresses locations B and C where the point kernel method shows an excess of 5 $\mu\text{Sv/hr}$ for a chronic point loss or 50 mSv/hr for an accidental full point loss.

Figure 6-4 shows an elevation view of the Electron Hall looking north and includes the West Service Tunnel. The tunnel is part of the access controlled area and will not be accessible during e-Linac operation.

ARIEL Facility Safety Report		
Document-51332	Release No. 3	Release Date.: 2015/07/06

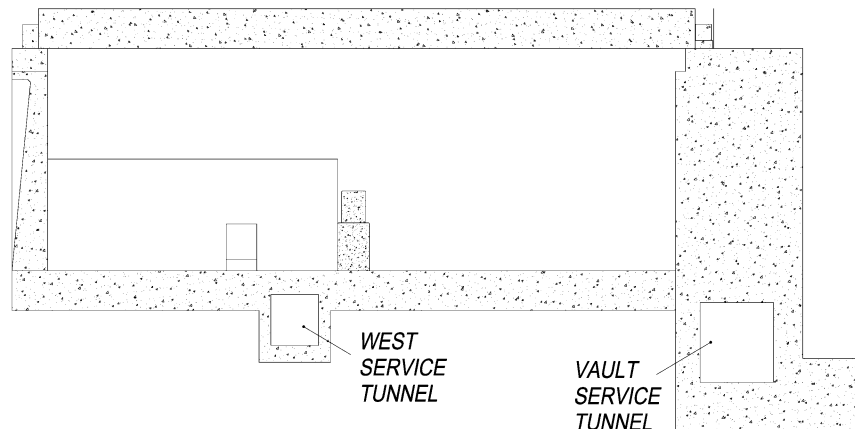

ELEVATION VIEW (LOOKING NORTH)

Figure 6-4 Elevation view looking North showing the West Service Tunnel located below the Electron Hall. It will be used for routing North to South cryogenic pipes and cable trays for the electrical services for the e-Linac. The inside concrete shielding wall is shown in the middle of the hall. The additional shielding at the ends of the roof beams is also shown.

6.1.3 100 kW Beam Dump Shielding

Simulations to optimize the local shielding for the 100 kW dump have been conducted and are summarized in [TRI-DN-13-29](#). The simulations used FLUKA^{7,8}, a Monte Carlo code optimized for modeling accelerator shielding problems.

The configuration that proved optimum for the shielding footprint is a layered steel and concrete structure as shown in Figure 6-5. The electron beam is directed west which is to the left in the figure. The dump insert will be water cooled aluminum which is surrounded by a water cooled lead shield that is 10 cm thick azimuthally and 13.5 cm thick in the forward direction.

⁷ G. Battistoni, S. Muraro, P.R. Scala, F. Ceruti, A. Ferrari, S. Roesler, A. Fasso, J. Ranft, The FLUKA code: description and benchmarking, 2006

⁸ A. Ferrari, P.R. Sala, A. Fasso, and J. Ranft, FLUKA: a multi-particle transport code, CERN-2005-10, INFN/TC_05/11, SLAC-R-773, 2005

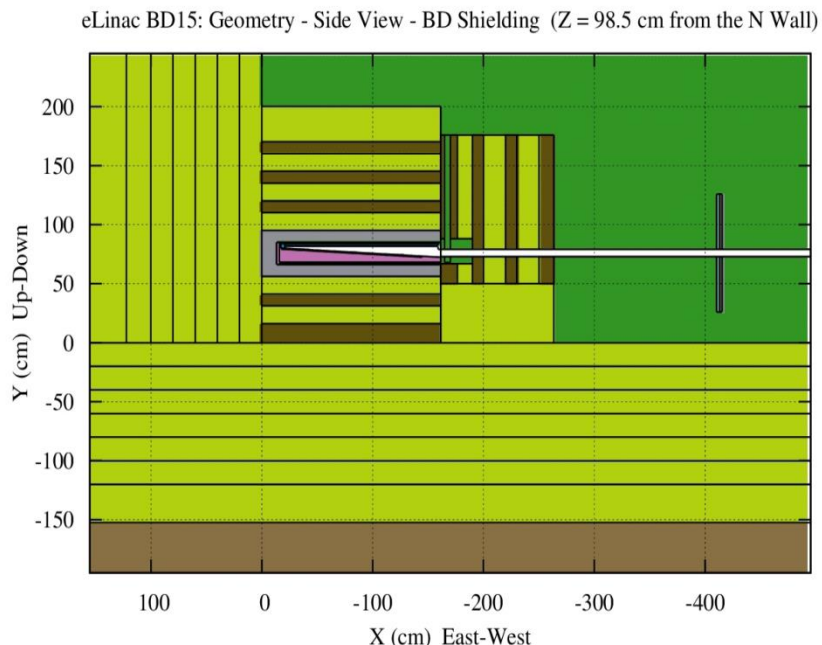


Figure 6-5 Elevation view of the simulation geometry for the shielded dump showing the layers of steel (brown) and concrete (green). The layers in the Electron hall poured-in-place concrete for the west wall and floor were used for biasing in the simulation.

The total thicknesses for the dump shielding materials are captured in Table 6-3.

Table 6-3 Local shielding thickness for the 100 kW dump

	Total Shielding Material Thickness (cm)					
	Above	Below	North	South	West	East
	Outside	Inside	Outside	Inside	Outside	Inside
Lead	10	10	10	10	13.5	0
Concrete	75	30	60.25	85	0	53.6
Steel	30	36.2	20	20	0	48.3

The shielding requirements included in the 100 kW dump system specification document ([Document-57707](#)) are itemized below as well as a summary of the simulation results from [TRI-DN-13-29](#).

Requirement (RS 10) The beam dump prompt radiation shielding shall attenuate the prompt neutron fluence in the soil to less than 1×10^4 neutrons/cm²-sec for high energy neutrons (Energy >20 MeV) and less than 1×10^5 neutrons /cm²-sec for low energy neutrons.

Rationale: To limit soil and ground water activation.

ARIEL Facility Safety Report		
Document-51332	Release No. 3	Release Date.: 2015/07/06

Results: The neutron fluence in the soil was limited to 10 mSv/hr in all directions. Given the electron beam energy and the moderation through the shielding, this is largely a low energy neutron spectrum and for the most conservative energies corresponds to a fluence limit of 4×10^3 neutrons/cm²-sec and easily meets the requirement above. The dose rates at the soil boundary are captured in Table 6-4. The requirement is met for all soil boundaries.

Table 6-4 Maximum dose rates at the inner and outer boundary of the poured-in-place concrete in the Electron hall

	Dose Rate (mSv/hr)					
	West Wall		Floor Slab		North Wall	
	Outside	Inside	Outside	Inside	Outside	Inside
Total	110	1.4E7	<0.01	7.1E3	<<0.01	305
Neutrons	1.7	1.4E7	--	6.9E3	--	196
Photons	63	9.4E5	--	220	--	87

Requirement (RS 11) The beam dump prompt radiation shielding in the vertical direction at a distance of 3 meters outside the shielding shall attenuate neutrons to a dose rate of 50 mSv/hour and photons to a dose rate of 5 mSv/hour.

Rationale: To meet a design limit for the total chronic loss dose rates outside the 1.8 m concrete roof shielding of 5 uSv/hour for a low occupancy area. The above dose rate requirements will result in a combined neutron and gamma dose rate of 1 uSv/hour to the area immediately above the dump, In addition this area will have a contribution from chronic losses along the accelerator shining through the vertical wall of ~2 uSv/hour, thereby keeping the total dose below 5 uSv/hour. [The TRIUMF policy on dose limits for a low occupancy area is 10 uSv/hour TRIUMF Safety Note 1.8 – Document-544]

Results: The dose rate above the dump had to be kept lower than this requirement in order to also meet the requirement RS13 for dose rate limits in the Electron Hall for radiation-sensitive components. The total, neutron and gamma dose rates above the dump local shielding are 6, 1.5 and 4.5 mSv/hr.

Requirement (RS 12) The neutron dose rate outside the dump shielding shall be limited to 10 mSv/hour, in order to keep long-lived concrete activation below the CNSC regulatory Unconditional Clearance Level (UCL) of 0.1 Bq/g.

Rationale: Trace quantities of naturally occurring Europium in the Main Accelerator Building concrete (~0.25ppm), when exposed to thermal neutrons leads to long-lived activation products. The Electron Hall wall activation should be kept below the UCL so as to limit the cool-down time at the time of decommissioning.

Results: The maximum dose rates at the inner boundary of the poured in place concrete in the Electron Hall are shown in Table 6-4. For none of the concrete surfaces in the vicinity of the dump was this requirement able to be met. The north

ARIEL Facility Safety Report		
Document-51332	Release No. 3	Release Date.: 2015/07/06

wall is within a factor of twenty of the requirement and the west wall and the floor both exceed the requirement. This means that the poured-in-place concrete in the vicinity of the dump will need to be considered as activated material in the decommissioning of the Electron Hall.

Requirement (RS 13) The beam dump prompt radiation shielding shall result in a combined neutron and gamma dose rate outside the dump shielding of less than 1 mSv/hour, at 3 meters in the upstream direction from the outside of the beam dump shielding.

Rationale: To limit the additional contribution to the chronic loss dose rate in the hall to less than 10%. The latter is required to protect radiation-sensitive components such as CCD cameras.

Results: This requirement does not affect personnel protection or the radiological environment for the hall. It is the requirement, however, that drives the size of the local shielding for the dump. The total material thickness in the dump as well as an elevation view of the dump is shown in Figure 6-5.

The simulation examined the dose rate at a distance of 6 meters from the exposed beam dump and shielding to provide a dose rate estimate for personnel carrying out remote handling tasks above the dump. After one week of cool down the dose rate is 0.5 mSv/hr and comes entirely from the Na-22 activation in the aluminum beam dump insert. Residual fields from the dump insert will be shielded with a lead lined transport flask. A 5 cm thickness of lead will attenuate the residual fields after one week of cool down to less than 10 μ Sv/hr.

6.1.4 De-rated (10kW) Beam Dump Shielding

Due to budget constraints, it was decided to operate on a de-rated beam dump at a maximum beam power of 10 kW with an un-rastered beam. The bulk shielding for the dump including the upstream shielding could then be made more economically from off-the-shelf concrete blocks rather than the layered steel concrete shown in Figure 6-5. The only steel retained is a collimator embedded in the upstream shielding that is 18cm thick and 0.5m x 0.5 m in the lateral direction to reduce the backscattered bremsstrahlung from the beam dump. Figure 6-6 shows the aluminum insert on which the beam is incident, the surrounding lead shielding, and the bulk and upstream concrete shielding. The layering through the concrete shielding is for purposes of variance reduction used in the FLUKA simulation to assess the shielding, and is not intended to delineate block dimensions. The shielding will be made of large removable concrete blocks whose total volume and outer extent are equivalent to that shown in the figure.

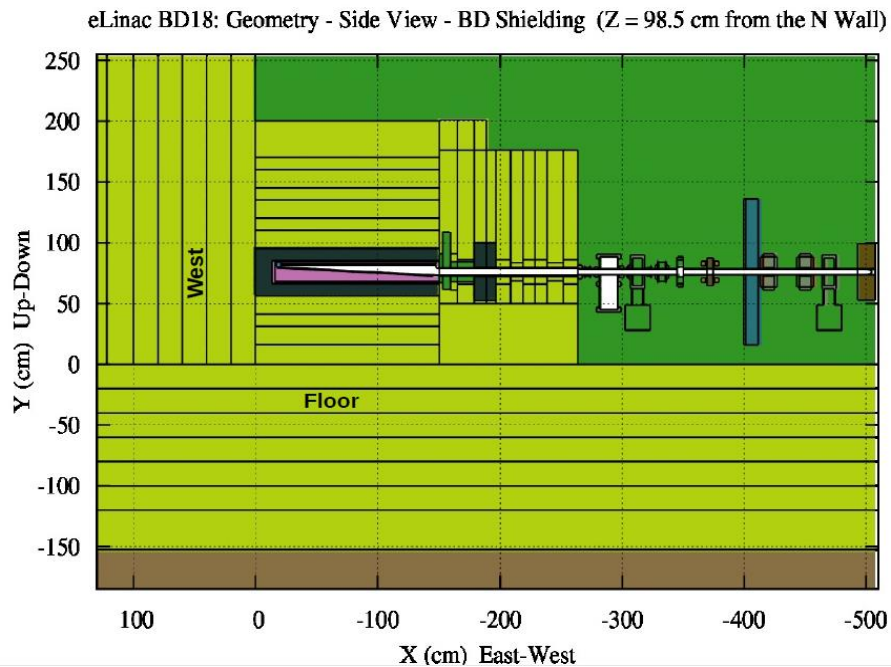


Figure 6-6 Elevation view of the 10kW dump shielding sectioned through the beam line showing the aluminum insert, the surrounding lead shielding, and the bulk and upstream concrete shielding.

The bulk shielding thicknesses for the lead and concrete are captured in Table 6-5.

Table 6-5 10 kW dump shielding thicknesses

	Total Shielding Material Thickness (cm)					
	Above	Below	North	South	West	East
Lead	10	10	10	10	13.5	0
Concrete	105	56.2	80.25	105	0	101.9

FLUKA Simulations were completed using 25 MeV electrons and quantified to 10 kW which corresponds to 400 microamperes beam current. A Gaussian beam distribution was used in both directions with a FWHM=1.41 cm. Figure 6-7 and Figure 6-8 show the results of the FLUKA simulation completed with 1.56 billion primaries. These results have been summarized in the Design Note [TRI-DN-14-13](#).

A summary of the shielding results compared with the requirements as presented in Section 6.1.3 for the 100 kW dump is included here. The requirements are repeated to facilitate comparison with the results of the simulation.

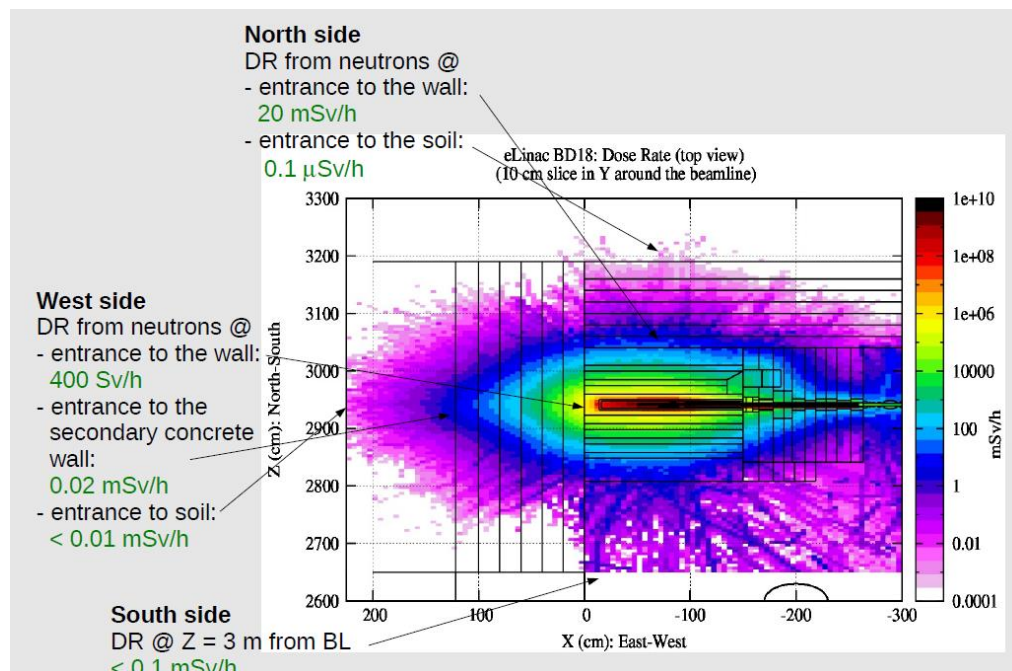


Figure 6-7 Plan view showing the total dose rate for the 10 kW dump bulk and upstream shielding. Neutron dose rates at concrete and soil boundaries are noted. The south side dose rate is a total dose rate.

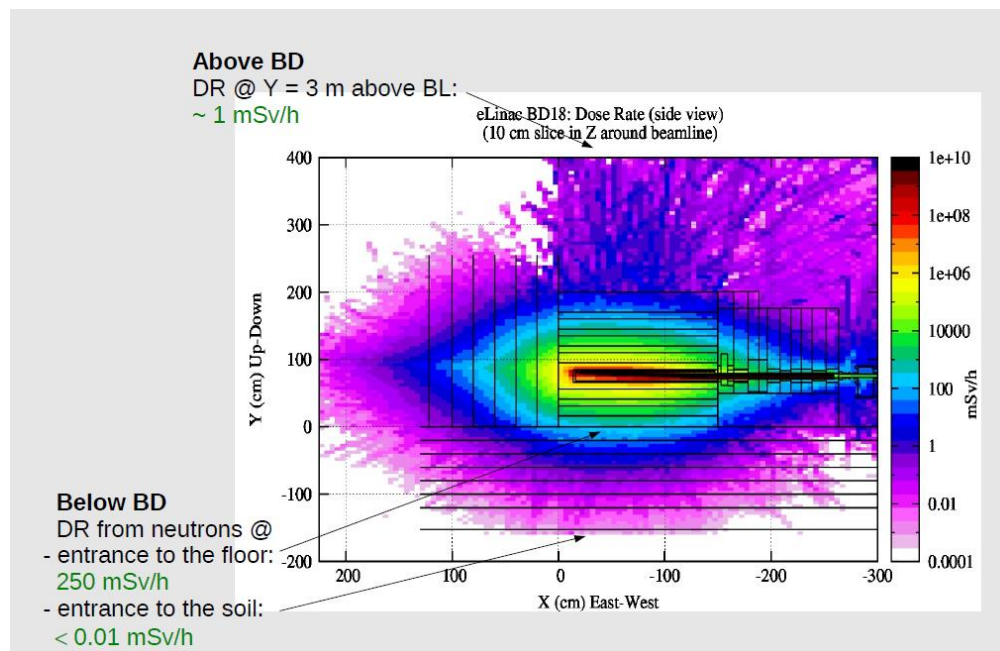


Figure 6-8 Elevation view showing the total dose rate for the 10 kW dump bulk and upstream shielding. Neutron dose rates at concrete and soil boundaries are noted. The dose rate above is a total dose rate.

ARIEL Facility Safety Report		
Document-51332	Release No. 3	Release Date.: 2015/07/06

Requirement (RS 10) The beam dump prompt radiation shielding shall attenuate the prompt neutron fluence in the soil to less than 1×10^4 neutrons/cm²-sec for high energy neutrons (Energy >20 MeV) and less than 1×10^5 neutrons /cm²-sec for low energy neutrons.

Results: A neutron dose rate limit at the soil boundary of 10 mSv/hr meets the above requirements. The neutron dose rates for the 10 kW dump, summarized in Table 6-6, meet this requirement at the outside wall-soil boundary. The last row of the table are the neutrons dose rates for the 75 MeV, 100 kW dump shielding configuration as reported in Table 6-4. All inside wall dose rates with the concrete bulk shielding for 25 MeV, 10 kW are less by at least an order of magnitude than those for the 100 kW dump.

Table 6-6 - Neutron dose rates at the soil boundaries outside the north and west walls and the floor for the 10 kW dump and in the last row for the 100 kW dump (see Table 6-4)

	Dose Rate (mSv/hr)					
	West Wall		Floor Slab		North Wall	
	Outside	Inside	Outside	Inside	Outside	Inside
Neutrons	0.02	4.0E5	<0.01	2.5E2	<0.001	20
Neutrons @100kW	1.7	1.4E7	--	6.9E3	--	196

Requirement (RS 11) The beam dump prompt radiation shielding in the vertical direction at a distance of 3 meters outside the shielding shall attenuate neutrons to a dose rate of 50 mSv/hour and photons to a dose rate of 5 mSv/hour.

Results: The dose rate above the dump had to be kept lower than this requirement in order to also meet the requirement RS13 for dose rate limits in the Electron Hall for radiation-sensitive components. The total dose rate above the dump local shielding at 3 meters is 1 mSv/hr.

Requirement (RS 12) The neutron dose rate outside the dump shielding shall be limited to 10 mSv/hour, in order to keep long-lived concrete activation below the CNSC regulatory Unconditional Clearance Level (UCL) of 0.1 Bq/g.

Results: The maximum dose rates at the inner boundary of the poured in place concrete in the Electron Hall are shown in Table 6-4. The 100 kW dump shielding design was not able to meet this requirement, and despite lower dose rates for the 10 kW dump shielding design; this requirement is again not satisfied. Therefore the conclusion remains the same - ultimately, in the decommissioning of the Electron Hall, the poured-in-place concrete in the vicinity of the dump will be considered as activated material.

Requirement (RS 13) The beam dump prompt radiation shielding shall result in a combined neutron and gamma dose rate outside the dump shielding of less than 1 mSv/hour, at 3 meters in the upstream direction from the outside of the beam dump shielding.

Results: This requirement does not affect personnel protection or the radiological environment for the hall. It is the requirement, however, that drives the size of the

ARIEL Facility Safety Report		
Document-51332	Release No. 3	Release Date.: 2015/07/06

local shielding for the dump. Figure 6-7 and Figure 6-8 show that the dose rate on the south side and above the dump is at or below 1 mSv/hr at three meters.

In conclusion, the dump shielding requirements are better satisfied for the de-rated 10 kW dump than for the 100 kW.

[N.B. The simulations for the de-rated dump were conducted for 25 MeV since the lowest energy presents the most stringent requirements for power deposition in the incident plate of the dump, and these results were required for the thermal analysis. The operation of the dump at 10 kW with the licensed electron energy of 30 MeV would result in an increase in the dose rate in the forward direction from $6 \text{ to } 9 \times 10^3 \text{ Gy}\cdot\text{m}^2/\text{h}\cdot\text{kW}$ [TRS188 Fig.17]. The listed dose rates for the West Wall in Table 6-6 would increase correspondingly. Note, however, that the forward direction shielding (i.e. for the west wall) is the same for the 10 and 100 kW dumps. Therefore the design meets the shielding requirements for 75 MeV and 100 kW, and it will also meet the shielding requirements for 30 MeV and 10 kW.

6.1.5 Dismantling the 10 kW Beam Dump Shielding

Simulations were carried out to assess the activation of the de-rated beam dump and surrounding shielding. Operation with the de-rated dump is expected to last between one and two years, ramping up gradually to full power. The irradiation profile for calculation of residual fields assumed a worst case of 1 year operation on average 8 hours per day.

Dose rates were examined that will impact dismantling and disconnection of services from the service stand when the shielding is reconfigured from the 10 to 100 kW dump. With the upstream shielding removed, the dose rate from the beam dump insert and surrounding shielding after one week of decay will be 10-20 $\mu\text{Sv/hr}$ at half a meter from the unshielded dump opening. Anticipated access would be for at most 4-5 hours with the aluminum insert in place. In addition, removing the aluminum insert would allow for placement of lead bricks at the opening of the lead shielding thereby reducing further the dose rate, should a more lengthy access be required.

The activation of the bulk concrete shielding blocks for the 10 kW dump was examined to determine the length of time required for radiation fields to decay to a level that allows the blocks to be used in other beam line applications. The simulations showed that after one year, the on-contact dose rate for the most exposed side of the concrete blocks (i.e. facing inward) is 10-15 $\mu\text{Sv/hr}$. These few blocks will be used inside other shielded enclosures or stored to allow for self-shielding of the higher dose rate side. Sides of the blocks away from the dump insert have significantly lower activation, and outer blocks will be reusable with no restrictions within one month of dismantling the 10 kW dump shielding.

6.1.6 Shielding Verification using FLUKA

In addition to the point kernel method, the shielding was assessed with FLUKA simulations which are documented in [TRI-DN-13-11](#). The simulations were completed for 50 MeV, 500 kW electron beam directed north with the e-Linac and also for an eventual energy recovery ring that would have 500 kW electrons directed south around a ring. Attenuation of photons and neutrons for different configurations

ARIEL Facility Safety Report		
Document-51332	Release No. 3	Release Date.: 2015/07/06

are shown in Figure 6-9 to Figure 6-18, and are discussed below. The locations (A – F) shown on the plan and elevation views of Figure 6-1 and Figure 6-3 are used for purposes of discussion. Results from the simulation correspond to $\sim 1 \times 10^8$ 50 MeV electrons incident on a 10 cm long by 5 cm diameter iron target, an equivalent material and geometry for any of the magnets where the beam could be miss-steered. Standard concrete has been used for the shielding material and the beam loss position for assessing each area was taken to be at the location that would maximize the dose outside shielding. The simulation results are converted to an ambient dose equivalent using the AMB74⁹ dose conversion coefficients. All projections displayed are shown averaged over a 40 cm slice to provide a conservative estimate of the dose rate. As well all projections are shown for a full beam loss and under these conditions the design dose rate outside shielding is ≤ 50 mSv/hr.

The conclusion from this shielding comparison is that generally dose rates calculated using the FLUKA model are comparable or less than those from the point-kernel method for shielding design presented above. This is consistent with earlier measurements made at TRIUMF along with comparisons of point-kernel method and FLUKA results for protons. Concurrence between these two methods provides confidence that FLUKA can be used to assess complex shielding configurations that do not lend themselves to the point-kernel method.

Location A (264' Elevation – Dogleg Shielding Void)

This location was initially assessed with a 12 foot thickness of concrete and a modest size hole bored through the north wall for the beam line transport from the e-Hall to the tunnel. The beam line optics necessitated a larger void in the concrete wall to accommodate the beamline components for the dogleg. In addition the simulations carried out demonstrated that it would not be possible, with the tunnel section of the beamline built, to place sufficient shielding around the beamline components along the dogleg to attenuate the dose rates sufficiently to allow occupancy of the tunnel when operating in the e-Hall. Therefore the tunnel will need to be defined as an access controlled area when accelerating beam in the Electron Hall.

However, during the first phase of commissioning before the tunnel section of the electron beam line is installed, it is proposed to add sufficient temporary shielding to the north wall to allow occupancy in the tunnel. A “worst case” beam loss scenario postulating the failure of the first dipole (EHAT:MB4) immediately upstream of the north wall was simulated to determine the necessary amount of temporary shielding with a 100 kW, 75 MeV electron beam directed to the beam dump inside the Electron Hall ([TRI-DN-13-11](#)). The downstream end of the dipole vacuum vessel was assumed to be 0.31cm thick stainless steel oriented perpendicular to the direction of the electron beam, 1.2m from the nearest downstream point in the north shielding wall.

The highest dose is along the axis that points through the thinnest shielding at the back of the north wall dogleg void. This is along the segment labelled KL in Figure 6-10. The dose rate attenuation along this axis is shown below in Figure 6-9 and

⁹ The AMB74 dose conversion coefficients are based on the ICRP74 operational quantity, ambient dose equivalent, for photons and neutrons.

ARIEL Facility Safety Report		
Document-51332	Release No. 3	Release Date.: 2015/07/06

represents average dose rates within ± 25 cm of the vertical plane for several vertical slices of 50 cm thickness.¹⁰

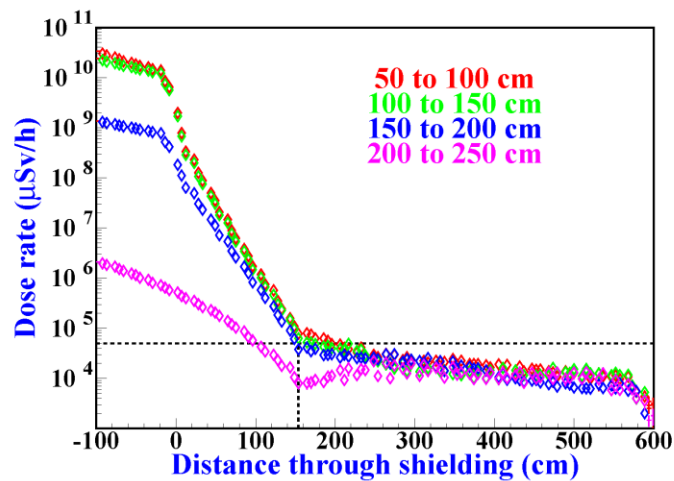


Figure 6-9 Attenuation through the dogleg shielding void in the North wall for different elevations. The horizontal dashed line is at 50 mSv/h and the vertical dashed line indicates the total thickness of concrete shielding used in the simulation

The horizontal dashed line is at 50 mSv/h, the maximum allowed “worst case” dose rate outside shielding. The vertical dashed line indicates the total thickness of concrete (the existing wall plus 66 cm) shielding used in the simulation. Based on the attenuation profile, a total of 120cm of concrete will be added to the existing wall to bring the maximum dose rate to less than half of the 50 mSv/h limit.

¹⁰ Due to the symmetry of the 0-50 cm and 100-150 cm slices with respect to the 75 cm beam height, these attenuation profiles are essentially identical, and only the 100-150cm profile is shown.

ARIEL Facility Safety Report		
Document-51332	Release No. 3	Release Date.: 2015/07/06

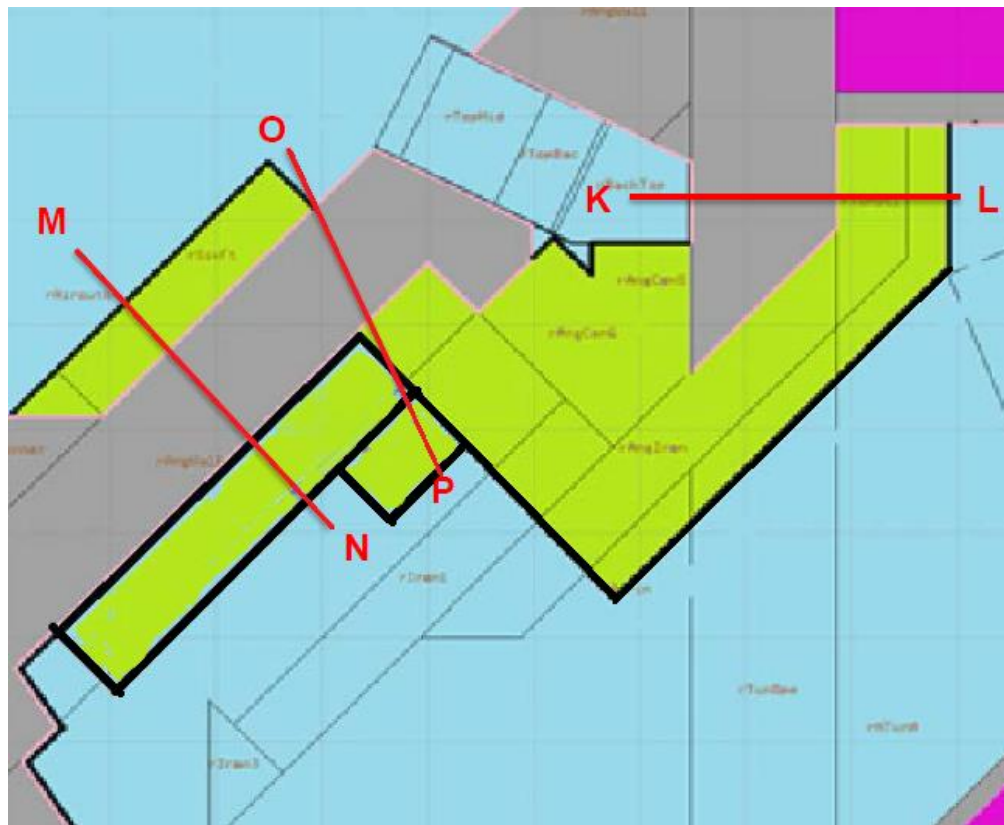


Figure 6-10 Specification for the BL4N/ARIEL tunnel shielding.

Figure 6-10 shows the specifications for shielding added to allow tunnel occupancy for operation of the e-linac at 100 kW into the electron hall beam dump. The original poured in place concrete is shown in grey, while added concrete is shown in green. Inside the hall, along the segment labelled MN, a total thickness of 65 cm was poured in place. The total thickness of that wall along the MN segment also includes 114.5 cm (ARIEL dwg #17662) poured concrete wall shown in gray, and temporary shielding blocks (30" = 76.2cm) shown in green with blue crosses, for a total concrete thickness perpendicular to the wall of 255.7cm, or 8.4 feet. [N.b. The specification was for 24" of temporary shielding, however only 30" blocks were able to be purchased.]

The adequacy of this shielding thickness for 100 kW operation is captured in Figure 6-11 which shows the results of a simulation that was carried out for the first version of the safety analysis report. This simulation did not include the dogleg void which has already been analyzed with a worst case loss above. The simulation does however cover a forward direction loss immediately out of the second cryomodule, showing the impact in the forward direction on the north west wall from a worst case loss. This is the most upstream location where 50 MeV electron beam is available.

The simulation was carried out for 4×10^9 primaries and shows a penetration for the total dose rate of 10 mSv/hr immediately outside the northwest wall on the left side looking downstream. The wall thickness in this region ($Z = 2400 - 2800$ cm) is 210 cm (≈ 7 feet). Figure 6-11 shows a significant reduction in dose for $Z < 2500$ cm

ARIEL Facility Safety Report		
Document-51332	Release No. 3	Release Date.: 2015/07/06

owing to the attenuation inside the e-Hall from the north-south wall. As indicated above the wall thickness along segment MN in Figure 6-10 will be 256 cm, and will, as such, provide more than sufficient protection to ensure dose rates for an accidental full loss remain below 50 mSv/hr.

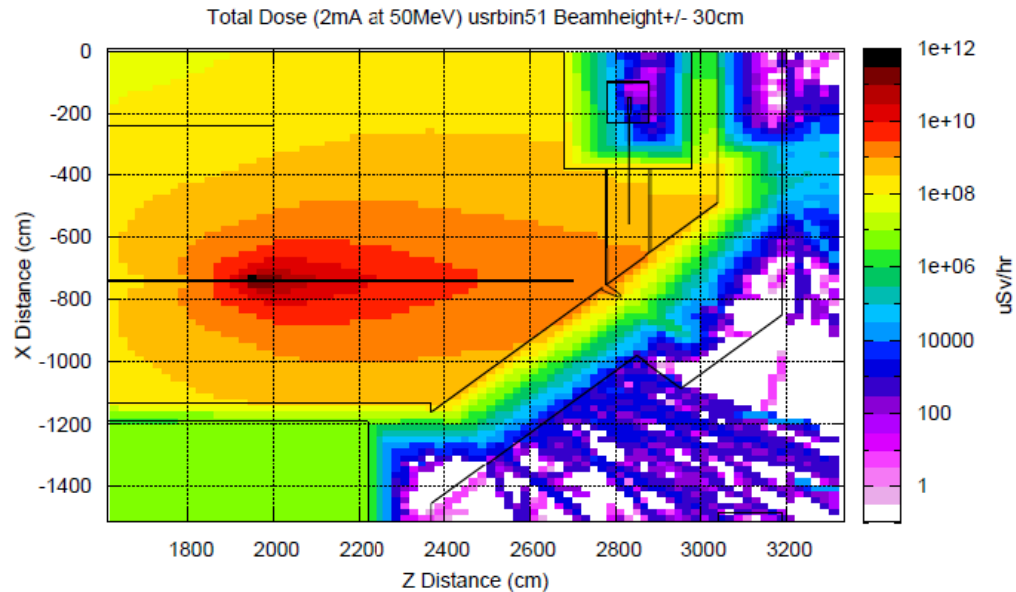


Figure 6-11 Total dose rate for a 50 MeV, 100 kW beam loss immediately downstream of the second cryomodule.

In comparing with the point kernel estimate of 12 feet of concrete for a forward direction loss, the 256cm thickness scaled by $1/\cos(45^\circ)$, yields a total thickness of 362 cm, or 11.9 feet. Likewise as indicated in Section 6.1.1 Shielding Requirements, the expected *worst case* chronic losses will result in a dose rate, scaled from the accidental full loss value, will be below 1 μ Sv/hr.

In the direction of the thinnest shielding, along segment OP in Figure 6-10, the total distance is slightly larger than the sum of the perpendicular thickness of the gray and temporary shielding, $114.5 + 76.2 + 60 = 250.7$ cm. The only shine from this direction would be from a lateral loss so 90° has been used and the attenuation calculated and shown in the last row of Table 6-2, bringing the dose rate down to 1.5 μ Sv/hr.

Location B (284' Elevation)

Figure 6-12 is an elevation view for a loss at a northern most point along the beamline ($Z=2650$ cm) normalized for a loss of 500 kW, as location B will have occupancy with e-Linac operation at full power. The beam is directed to the right onto an iron target. In the lateral direction, directly above the beam loss point, photons shown in the left plot are seen to be more penetrating than neutrons shown in the right plot.

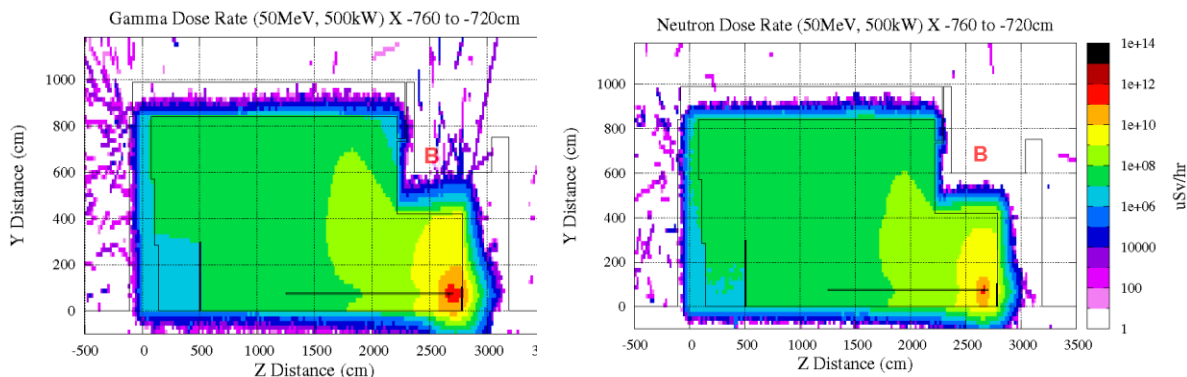


Figure 6-12 Elevation view showing the photon & neutron ambient dose rate at Location B for a 50 MeV, 500 kW electron beam loss just inside the north shielding wall. Location B above the slab is indicated.

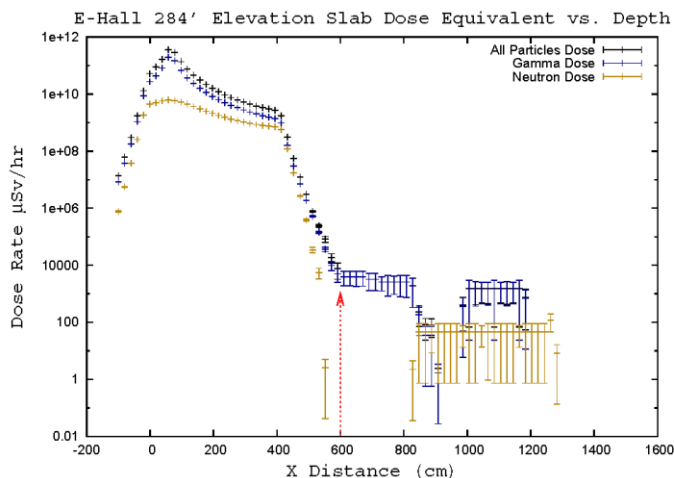


Figure 6-13 Attenuation of the dose equivalent through the six foot thick slab at the 284' elevation. The red arrow marks the top of the slab.

The attenuation profile of the dose equivalent through the six foot thick slab is shown in Figure 6-13 for the different radiation components. Given the close proximity to the beam loss an area of ± 50 cm in the highest dose rate region has been used to extract the one-dimensional projection. The dose rate immediately above the slab for this catastrophic loss is 6.8 mSv/hr, and is well within the 50 mSv/hr limit.

Location C (297' Elevation)

The full point loss at the end of the last cryomodule was used to evaluate the dose directly overhead atop the Electron Hall roof beams (Location C). This point was chosen as this is the earliest point at which the electron beam is at its full beam power. Figure 6-14 is a projection looking South, with the cyclotron vault located to the left in the figure.

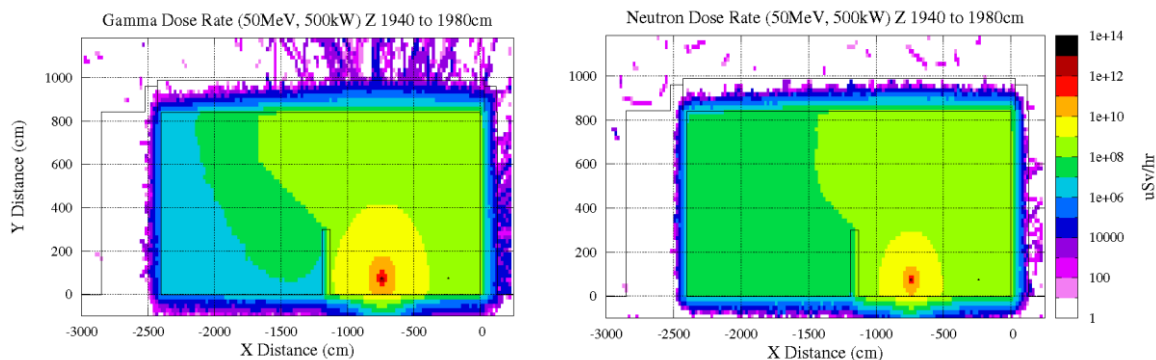


Figure 6-14 Elevation view looking South showing the penetration of photons and neutrons for the roof beams for a 50 MeV, 500 kW electron beam loss. The region right of the West shielding wall ($X > 1.2\text{m}$) is normally filled with soil below grade ($Y < 7.6\text{ m}$)

Figure 6-15 is an elevation view, a projection looking West, with the beam directed to the right. Locations B and C are marked in the figure to orient the reader.

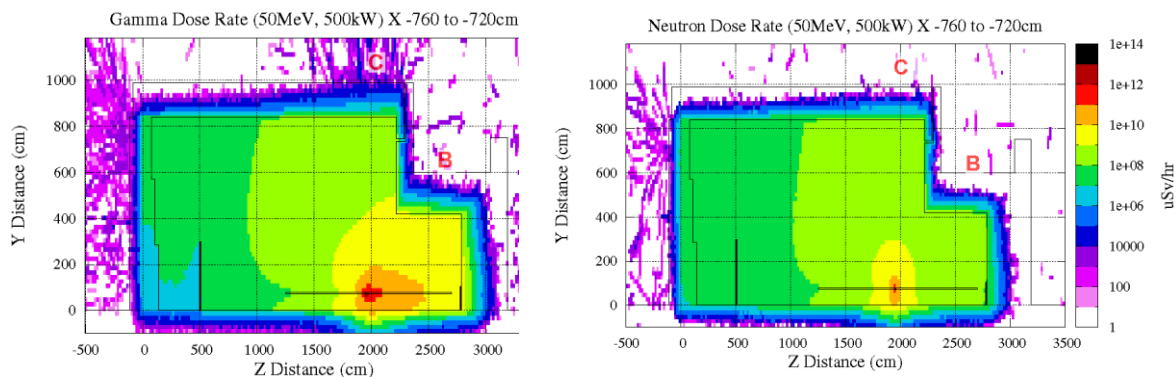


Figure 6-15 Elevation view looking West showing the photon and neutron penetration for the roof beams for a 50 MeV, 500 kW electron beam loss. Locations B and C are also indicated.

Figure 6-16 shows the extracted dose rate through the thickness of the roof beam, showing for a $2\text{m} \times 2\text{m}$ area in X and Z. The photons are the dominant contribution to dose and for the 75 MeV, 500 kW beam result in a dose rate of 19 mSv/hr immediately above the roof beam. This is within the 50 mSv/hr dose rate limit for an accidental full beam loss.

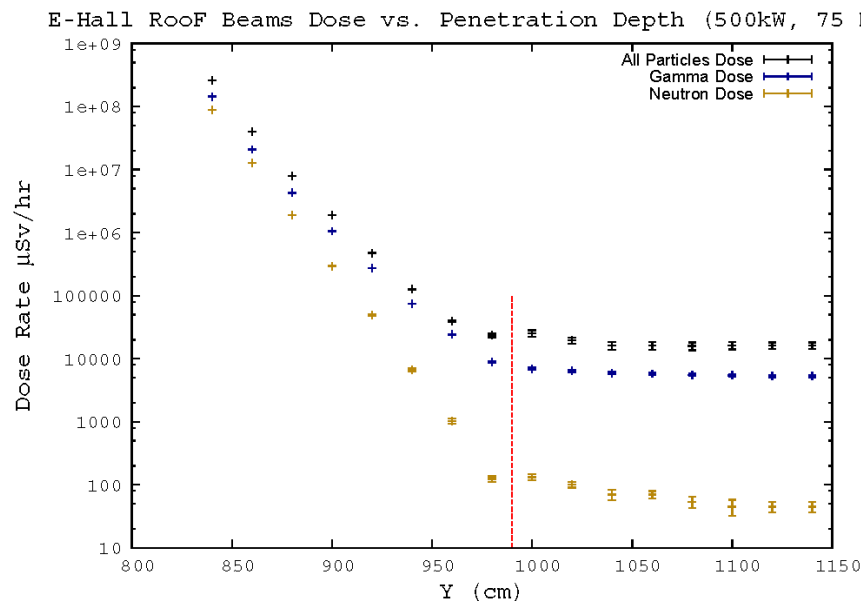


Figure 6-16 Dose equivalent attenuation through the roof beams for an accidental full loss of 75 MeV, 500 kW electrons in the e-Hall. The red line indicates the outside of the roof beam.

Location D (289' Elevation), E (301' Elevation) & F (264' Elevation)

A projection taken east of the e-Linac to include locations D, E and F on the South side of the Electron Hall is shown in Figure 6-17. The beam loss location, energy and power is the same as for Figure 6-14 and Figure 6-15. Both locations F and D on the south side of the Electron Hall ($Z \leq 0$) at the B2 level ($Y=0$ cm) and at grade ($Y=760$ cm) respectively have dose rates below 10mSv/hr for a full 500 kW loss. Location E where offices are located at ($Y=1160$ cm) has a dose rate of less than 1 mSv/hr. Both these dose rates are well within the requirements for the respective low and high occupancy areas.

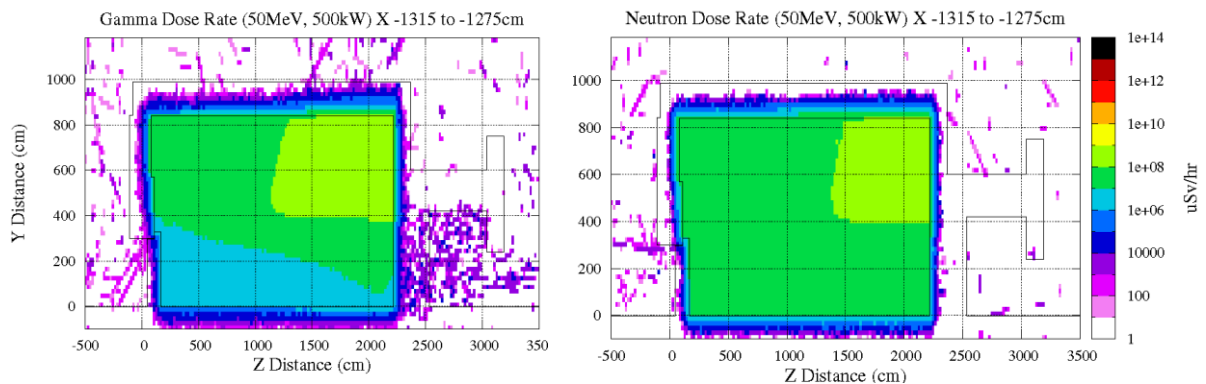


Figure 6-17 Elevation view looking West showing the photon and neutron dose rate on the South side at different elevations

ARIEL Facility Safety Report		
Document-51332	Release No. 3	Release Date.: 2015/07/06

Electron Hall Access Mazes

FLUKA is a useful tool for assessing the design for penetrations and mazes in the shielding walls. The simulation shows that at the mid-point along the length of the southeast maze the neutron dose rate is an order of magnitude higher than the gamma dose rate. Therefore, unlike the bulk shielding, in the case of the maze the neutrons are more penetrating and therefore drive the shielding design. Figure 6-18 shows the neutron dose rate for a 500 kW point loss immediately after the cryomodule EACB for both the southeast maze at the B2 level and the northeast maze at the 284' elevation. The B2 level projection also shows the dose rate at the cyclotron vault maze entrance, where the e-Maze vault-side access control door is located that forms part of the lock-up chain for the Electron Hall. This door is located at X=2700 where the simulation shows dose rates well below 50 mSv/hr.

The e-Maze ehall-side access door remains in much the same location as it was in the former Proton Hall. An additional bend to the vault maze on the vault side was added during the 2014 shutdown in order to reduce the dose rate at the e-Maze, e-Hall-side door which arises from proton beam losses in the 500 MeV cyclotron. This additional shielding has reduced the chronic dose rate in the e-Hall maze to less than 10 μ Sv/hr.

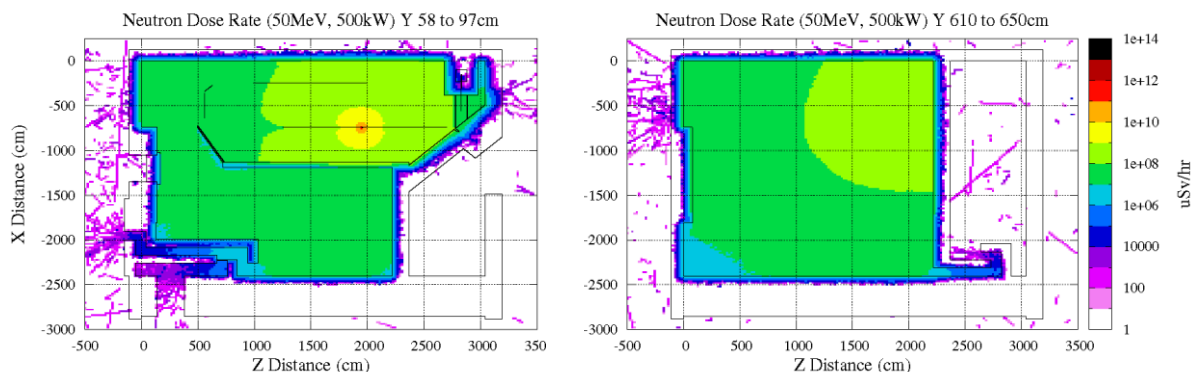


Figure 6-18 Neutron dose rates at the B2 level (264'elevation) and the 284' elevation showing the attenuation along each of the access mazes for the Electron Hall

6.2 Access Control and Radiation Monitoring System

6.2.1 Interlocked Access Control System

Hazardous levels of prompt radiation are present in some areas of the ARIEL project due to operation of the electron accelerator. The Access Control System (ACS) protects people from this hazard by maintaining safe configurations that keep people out of these areas when the hazard is potentially present, and by turning off the accelerators and clearing any unsafe configurations should they occur as the result of a failure or intervention. In the parlance of radiation safety systems these areas are known as 'exclusion areas'.

ARIEL Facility Safety Report		
Document-51332	Release No. 3	Release Date.: 2015/07/06

The requirements for the e-Linac Access Control System have been described elsewhere ([Document-43329](#)). The system consists of e-Linac beam inhibit devices and Area Safety Units, both interfaced to a central logic controller backed up by relays and hardware disconnects. It performs two complementary interlock functions that together maintain safe configurations:

It enforces standard beam delivery procedures and ensures that a safety beam inhibit device cannot be used to turn a beam on unless all exclusion areas that might receive beams are locked and secured;

It enforces standard area access procedures and ensures that a locked and secured exclusion area cannot be unlocked unless beams to the area are off. Once a locked and secured area has been unlocked and opened the system prevents beams from being turned on.

It also turns off the accelerator (an 'access trip') and restores a safe configuration if a safe configuration is lost due to a beam inhibit device failure or area intervention.

As described in Section 3, the areas to be designated as exclusion areas have been determined by the application of existing TRIUMF policy [TSN 1.8.0. Policy for Maximum Allowable Dose Rates in Accessible Areas at TRIUMF](#) taking into account shielding effectiveness and both normal and abnormal accelerator operation.

The radiation hazard associated with e-Linac operation derives from both X-rays that are present when RF power is applied to the accelerating cavities, and from bremsstrahlung and neutrons with accelerated beam present. The areas designated exclusion areas during e-Linac operation are:

- the Electron Hall (including the West Tunnel); and
- the E-hall/Cyc Maze that connects the e-Hall and 500 MeV Vault.

As described in Section 6.1.6, during the first phase of operation of the e-Linac in the e-Hall, sufficient temporary shielding has been added to the angled north wall to allow ARIEL Tunnel occupancy while operating with 100 kW beam to the dump. For the second phase of operation when the temporary shielding is removed to allow completion of the beamline, the ARIEL Tunnel will be added to the exclusion areas for e-Linac operation.

Area Safety Units (ASUs) are subsystems that interface beam exclusion areas within an ACS.

Each ASU shall:

- House mechanical hardware that provides a signal indicating that all doors to an exclusion area are 'locked' ;
- Use Watchman's Stations to enforce timed physical searches that ensure an area is unoccupied before access doors are closed;
- Initiate audible and visual start-up alarm cycles including a final warning after doors are closed and provide a 'secured' signal at the end of the final alarm cycle;
- Act as the central termination point for all area Emergency Trip pushbuttons.

ARIEL Facility Safety Report		
Document-51332	Release No. 3	Release Date.: 2015/07/06

The exclusion area locks are designed so that a locked area cannot be unlocked unless the Area Safety Unit is receiving a key release control signal, therefore Area Safety Unit locked and secured signals and central logic can reliably ensure areas are unoccupied and are inaccessible.

The ASU for the Electron Hall is located at the southeast maze entrance at the 264' elevation. The ASU for the E-hall/Cyc Maze exclusion area connecting the Electron Hall and the 500 MeV Vault is also located adjacent to the e-Hall ASU.

The beam inhibit devices are capable of assuming states that:

- prevent beam from being created in the accelerator, or
- prevent beam from being accelerated within the accelerator, or
- effectively block beam to a given area, or
- prevent beam from being directed into an area.

The beam inhibit devices are designed so that they cannot deliver accelerated beams to areas unless they are receiving enable control signals, therefore approved combinations of electron accelerator safety beam inhibit device safe status signals and central logic backed up by hardware disconnects can reliably ensure beams are off and are prevented from coming on. The beam inhibit devices for the e-Linac are:

- e-gun HV power supply (350 kV);
- Injector (EINJ) klystron power supply (65 kV); and
- Accelerator module EACA klystron supply (65 kV).

In addition there are beam inhibit devices for confining the electron beam to the e-Hall and directing it to the dump. These depend on the settings for a combination of two benders; EHAT:MB4 which directs beam to the dump and the bender EHAT:MB0 downstream of MB4 that directs beam to the tunnel.

- EHAT:MB4 bender polarity switch and reed switch; and


EHBT:MB0 power supply.[N.b. This feature of the ACS was initially foreseen as a requirement to allow access to the ARIEL tunnel during operation in the e-Hall. Even though this will no longer be possible once the temporary shielding in the tunnel is removed, it may still be advantageous to have the ability to define the beam as confined to the e-Hall when considering access requirements to other areas of the ARIEL building. Therefore devices to define this beam mode have been retained in the ACS.]

The status of all beam inhibit devices and exclusion areas are displayed in the e-Linac Control Room on a dedicated ACS console.

The Access Control System incorporates an independent Emergency Trip system that unconditionally turns off the electron accelerator should any Emergency Trip pushbutton be activated.

ARIEL Facility Safety Report		
Document-51332	Release No. 3	Release Date.: 2015/07/06

A schematic of the e-Linac Access Control System showing the different elements described above and the interface to the e-Linac Radiation Monitoring System is shown in Figure 6-19.

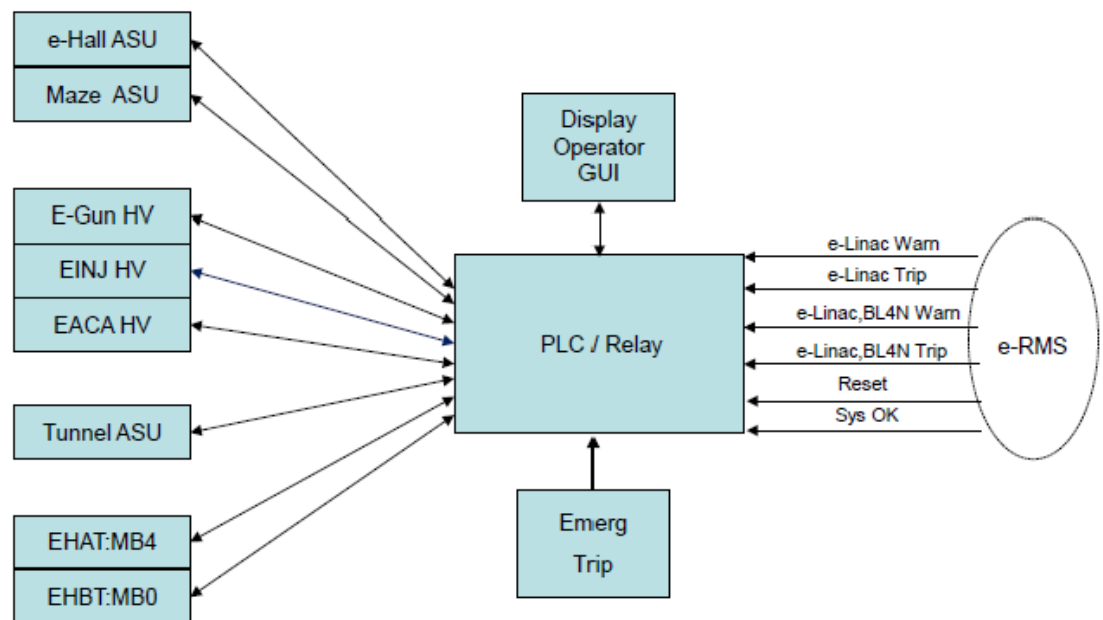

e-Linac Access Control System

Figure 6-19 Schematic of the e-Linac Access Control Systems and the interface to the different components and the e-Linac Radiation Monitoring System

A review of the Access Control System device locations for watchman stations and beacons, as well as the type and duration of the lock-up alarm was completed incorporating human factor considerations in the design. Eight watchman stations are now in place in the E-Hall. All the changes made have been captured in the E-Linac Access Control System requirements ([Document-43329](#)). Future configuration changes of the accelerator will now trigger a design review of the access control system. In addition, training has been implemented for Locking Up and Accessing the E-Hall and is captured in Section 7.7.

6.2.2 E-Linac Radiation Monitoring System

The e-Linac Radiation Monitoring System (eRMS) uses both gamma and neutron detectors to directly measure dose rates outside shielding, with particular attention being paid to maze openings where neutron levels are expected to be higher.

Each detector has associated warn and trip setpoints of 10 and 20 $\mu\text{Sv/h}$ respectively. Local and Control Room audible and visual alarms are energized when

ARIEL Facility Safety Report		
Document-51332	Release No. 3	Release Date.: 2015/07/06

any warn setpoint is exceeded. The electron accelerator will be turned off when any trip setpoint is exceeded.

The speed of the trip will be such that the maximum dose per beam loss incident is less than 100 uSv.

The status of all radiation detectors will be displayed in the e-Linac Control Room on a dedicated RMS console.

The design of the eRMS is described elsewhere ([Document-43329](#)). The locations of gamma monitors mounted on the roof of the e-Hall at two elevations are shown in Figure 6-20. The locations of gamma/neutron detector pairs mounted at the two access mazes to the e-Hall are shown in Figure 6-21.

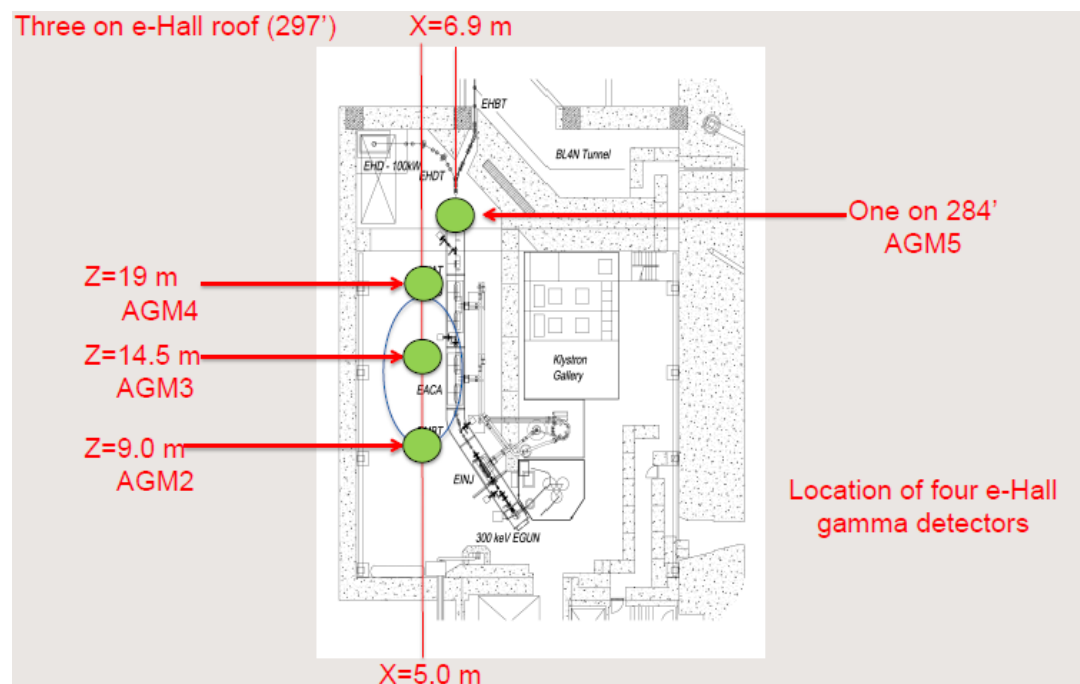


Figure 6-20 Schematic showing the location of e-Hall gamma monitors. These are located on the roof at elevation 297' and one is on the lower elevation roof (284') at the north end of the e-Hall. [N.b. The gap in the south wall is where the 4-foot thick shielding door will be located.]

ARIEL Facility Safety Report		
Document-51332	Release No. 3	Release Date.: 2015/07/06

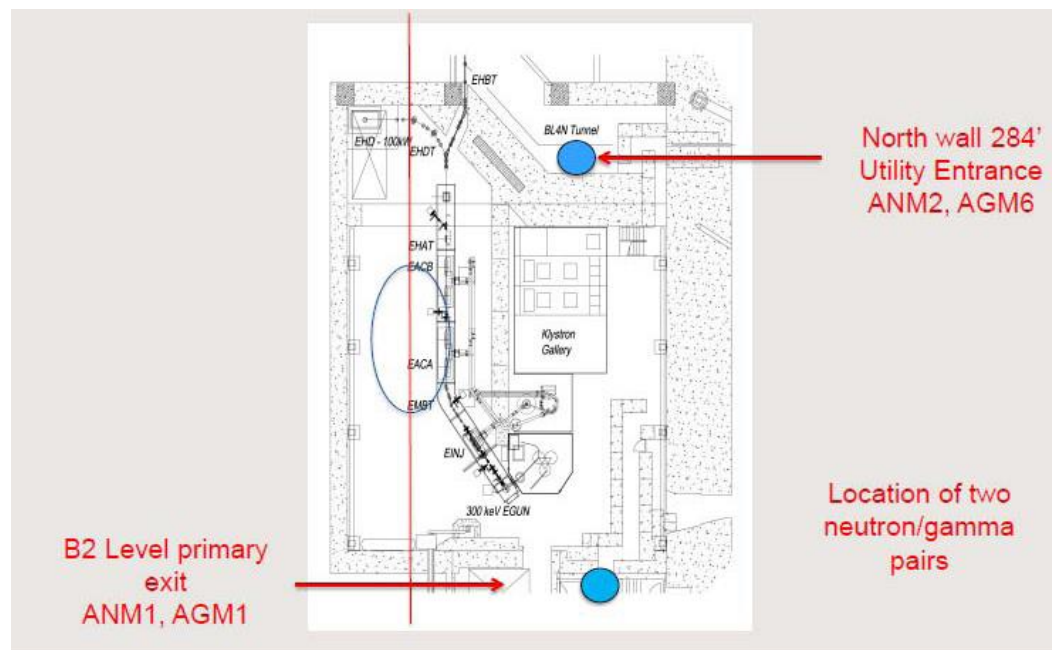


Figure 6-21 Schematic showing the location of the neutron/gamma monitor pairs. One is located at the 264' elevation south exit maze, and the other is located at the 284' elevation north exit maze from the Electron Hall. [N.b. The gap in the south wall is where the 4-foot thick shielding door will be located.]

6.2.3 Emergency Power

The Access Control System, the Radiation Monitoring System, the Oxygen Deficiency Monitoring System are powered by an uninterruptible power supply (UPS) backed up by the diesel generator.

6.3 Operating Mode Definitions

When it is implemented, the only mechanism for Operators to configure the e-linac operating conditions will be through the Operating Modes interface of the EPICS controls. The terminology “beam property” and “beam path” were introduced at the ISAC facility, but the usage at e-linac is not identical. Permitted combinations of property and path result in an Operating Mode. The beam property is a prescribed range of in-pulse current and duty factor (up to C.W) leading to a maximum power at a prescribed beam energy. The “beam path” is a start-through-end list of in-beamline elements starting at the gun and terminating on a prescribed beam dump. The property and modes are tabulated in the ARIEL e-linac MPS Requirements, Document-85636. The EPICS control will reject Operator requests for non-permitted combinations of property and path. Using the control system to define modes to ensure delivery of beam at or below the rated power level for all consistent beam paths provides an extra level of redundancy for machine protection.

6.4 Electron Hall Air Monitoring

As described in Section 5.1.3, 5.1.4, and 5.2.4 only modest levels of air activation and emissions from beam operation to the 100 kW dump. Activated air from the e-Hall or

ARIEL Facility Safety Report		
Document-51332	Release No. 3	Release Date.: 2015/07/06

the top of the surge tank from the water package, as well as vacuum exhaust from the section of the beam line in proximity to the 100 kW dump will be directed to a dedicated HEPA filtered exhaust stack on the roof of the Main Accelerator Building. A sampling manifold has been installed in the duct and is used to draw a sample to a new air monitor that has been added to the bank of air monitors on the 500 MeV Vault roof.

Emissions from the water package are directed to the nuclear exhaust by ventilation fan EHDT:HVC:EF01. Machine Protection System slow interlocks are in place to inhibit beam operation if either this local fan or the e-Hall main ventilation fan are off. A hydrogen sensor is located at the top of the water package surge tank. An MPS slow interlock will trip the beam if the hydrogen concentration exceeds half of the explosive limit ($\geq 2\%$). Radioactive emissions will be monitored and additional mitigation measures put in place if these represent a measurable fraction of current site emissions.

A separate bank of air monitors, located in the ARIEL building penthouse is planned for the Target Hall and associated activities in the ARIEL building

6.5 Radiation Surveys and Area Dosimeters

A radiation survey will be required prior to entry into all ARIEL high radiation areas. This is controlled by the work permitting process described in [TSOP-12 Configuration Management](#). The radiation survey will consist of field measurements throughout the area to be entered.

In addition, a radiation survey must precede maintenance or repair work. These surveys will also include swipes for removable contamination and air sampling when vacuum systems are to be opened.

The areas outside high radiation areas for the Electron Hall and ARIEL building areas will be added to the regular rotation of surveys in order to ensure dose rates remain as low as reasonably achievable (ALARA). Together with the surveys 'area dosimeters' will be deployed in those areas of high occupancy to provide an integrated dose for the area and verification that dose rates will remain ALARA.

6.6 Personnel Dose Monitoring

Dose monitoring for personnel will follow the established dose monitoring program at TRIUMF as described in [TSN 1.2 TRIUMF Policy on Radiation Exposure](#). OSL¹¹ dosimeters are issued for all staff and personnel with regular access inside the security fence. Short-term visitors are issued a direct reading dosimeter and escorted on site by the TRIUMF contact.

¹¹ OSL dosimeters are the Landauer badges that use the optically stimulated luminescence technology.

ARIEL Facility Safety Report		
Document-51332	Release No. 3	Release Date.: 2015/07/06

6.7 Mitigation of Other Hazards

6.7.1 Ozone Monitoring

As shown in Section 5.2.3, with an air exchange rate of approximately once per hour, ozone equilibrium concentration levels in the Electron Hall during machine operation are just below the Threshold Limit Value (TLV) for which remediation measures are recommended. In the early stages of operation, a hand-held ozone monitor will be used to confirm levels in the Hall immediately after accelerator operation. Depending on these findings, procedures and hall exhaust will be adjusted to ensure that ozone levels are well below the TLV before the hall is opened for occupancy.

6.7.2 Hydrogen Monitoring for the Beam Dump

Emissions from the water package are directed to the nuclear exhaust. A hydrogen sensor is located at the top of the water package surge tank. The control system for the 100 kW dump services will ensure that this air volume is flushed as required to keep hydrogen levels below half of the explosive limit in air (< 2%). Radioactive emissions will be monitored and additional mitigation measures put in place if these represent a measurable fraction of current site emissions.

6.7.3 Oxygen Deficiency Monitoring System & Cryogen Safeguards

The Electron Hall and the Compressor Building are equipped with an Oxygen Deficiency Monitoring System that consists of the same model sensors as those used in the upgraded system at ISAC. The upgrade at ISAC was to use an electro-chemical cell sensor with a full membrane rather than a capillary type sensor in order to obtain a more linear oxygen concentration response for both an LN₂ and an LHe mixture in ambient room air. Two sensors have been positioned in the Electron Hall on the east and west side of the north-south shielding wall and one sensor is located in the west service tunnel at the B3 level immediately below the E-Hall. Because of the high neutron radiation fields anticipated on the west side of the shielding wall in the Electron Hall and in the service tunnel, these sensors are positioned immediately outside the e-Hall, and a pump is used to draw a sample from each of these locations. The pumps as well as the sensors and monitoring system are on emergency power. A local alarm and beacon is located in the respective areas and a green/red indicator light at the entrance to the area in order to inform staff that it is safe/unsafe to proceed into the area.

The ODM system requirements are that upon a drop in the oxygen level below 19.5%

- a local audible alarm in the area and a remote alarm in the Main Control Room is generated;
- the green status indicator changes to red at the entrances to the area;
- air exhaust for the area is driven to the maximum flow rate; and

ARIEL Facility Safety Report		
Document-51332	Release No. 3	Release Date.: 2015/07/06

- the enable signal for the control valves on the distribution line for LN2 to the Electron Hall is removed forcing the valve to close.

The Compressor building is also equipped with a sensor mounted at 1.4 m above the floor with a local alarm and beacon and a red/green status indicator is mounted at the entrance to the building.

6.7.4 SF₆ Mitigation Measures

The 3 m³-atm of SF₆ is not sufficient to cause an asphyxiation hazard in the service tunnel which has a volume below a 1.4 m height of 67 m³. Nevertheless, this area has oxygen deficiency monitoring and personnel will be alerted should an SF₆ leak result in a local alarm.

6.7.5 Fire Suppression Systems

A fire hazard analysis has been completed for the ARIEL project by an outside consultant to meet the requirements of NFPA-801 in addition to the NBBC and NFCC. In addition the modifications to the Electron Hall and the construction of the new ARIEL building and tunnel have had a code design analysis completed by the code specialist retained by the A&E firm for the project.

A revision to the fire hazard analysis for the former proton hall is being completed. To first order the fire hazard is comparable in nature and magnitude for the Electron Hall as it was when the space was the Proton Hall. Both spaces include beam line components and associated services. The one difference, regarding the added combustible inventory for the insulating oil (500 litre) used in the e-Linac klystrons, is being reviewed by a fire protection engineer.

There is no sprinkler system for the Electron Hall. Two smoke detectors mounted in the exhaust air ducts for the hall are displayed and will annunciate as part of the Fire Alarm System in the Main Control Room.

6.7.6 Communication Systems

Communication between the Control Room and the Electron Hall will be via a public address system. In addition telephones in a few locations in the hall have been installed.

6.8 Excursions from Normal Operation

6.8.1 Radiation Monitoring System Failure

The Radiation monitoring System is designed to detect excursions of beam losses that can result in high radiation fields and to terminate beam operation within 0.2 seconds. A failure of the RMS simultaneous with an accidental full loss of the 500 kW beam could result in dose rates up to 50 mSv/hr in areas outside shielding. It is unlikely that such catastrophic beam losses would remain undetected by the machine protect system for very long. Nevertheless, if undetected for an hour it would result in a dose of 50 mSv to TRIUMF personnel.

ARIEL Facility Safety Report		
Document-51332	Release No. 3	Release Date.: 2015/07/06

6.8.2 Oxygen Deficiency Monitoring System Failure

Failure of an oxygen deficiency monitor could result in an undetected asphyxiation hazard for personnel particularly in the areas below grade such as the Electron Hall and the West Service Tunnel. The ODM system is on emergency power and has been designed to alarm should any system component fail. Cryogenic system procedures that have an associated increased risk for release of cryogenic liquids shall require personnel to wear personnel O₂ monitors and may also require a buddy system.

6.8.3 Cooling Water Failure

Interlocks in all water circuits provide for the shutdown of the appropriate accelerator system in the event that flow rates or pressures in that system deviate from nominal values.

A leak in the high active cooling water package for the 100 kW dump is detected either with sensors in the catch tray or a level monitor on the ballast tank. Either indicator results in shut down of the accelerated beam to the dump. All drains in the Electron Hall are directed to the Main Accelerator Building radioactive sump. This water is assayed by the TRIUMF Radiation Protection Group (RPG) as part of the Emissions Monitoring Program before release to the sanitary sewer.

In the worst case, should a leak of tritiated water into the hall occur, access would be restricted and require Personal Protective Equipment (PPE) specified by the RPG to limit the exposure from both inhalation (air-supplied respirator) and skin absorption (TYVEK suit).

6.8.4 Electrical Power Failure

The accelerator installation has been designed so that an electrical power failure leads to safe shutdown of the accelerator and the cryogenic system.

6.8.5 Fire

The [TRIUMF Fire Protection Program](#) includes a pre-incident plan that provides emergency responders, Vancouver Fire & Rescue Services, with a convenient summary of ignition sources, fire loads and other hazards in each area of the laboratory.

The procedures in the event of a fire are described in the [TRIUMF Emergency Response Plan](#).

A fire hazard analysis has been completed to address the modifications being made for the Electron Hall. The added combustible load from the volume of stored insulating oil in the klystron and e-gun RF systems is mitigated by safeguards for containing the oil and a minimization of ignition sources in the Hall. In addition, there is no significant inventory of radioactivity present in the Electron Hall that could be released from the facility in the event of fire.

6.8.6 Explosion

There is no explosion hazard directly associated with this facility. All vessels containing cryogenics or compressed gas have pressure relief valves in the event of

ARIEL Facility Safety Report		
Document-51332	Release No. 3	Release Date.: 2015/07/06

over pressure. In addition the cryogenic modules include a burst disc to mitigate against a sudden warm up of the LHe in the cavity.

6.8.7 Design Level Earthquake

The BCBC 2006 and NBCC 2005 define the design level earthquake as the seismic ground motion at a given site having a 2% probability of exceedance in 50 years at a median confidence level. This is statistically equivalent to a 0.04% annual probability of exceedance. This probability level was chosen because it is in line with the accepted reliability level for the seismic performance of building structures in Canada, and it allows this reliability level to be achieved uniformly across the varying seismotectonic environments in the country. The design ground motion does not correspond to a single value of earthquake magnitude. Rather, it results from a probabilistic evaluation of the many possible seismic events of varying magnitudes, types, distances, and likelihoods that all contribute to the total seismic hazard at a given site.

Seismic design of new Normal Importance buildings according to the provisions of the BCBC 2006 and NBCC 2005 are intended to provide the following outcomes:

- Protect the life and safety of building occupants and the general public as the building responds to strong ground shaking (i.e., the design ground motion).
- Limit building damage during low to moderate levels of ground shaking.

The Code acknowledges that the building and its contents may suffer damage during the design level earthquake which may require significant repair before occupancy and functioning of the building can be resumed, but that structural collapse will be prevented and that the lives of its occupants will be safeguarded.

ARIEL Facility Safety Report		
Document-51332	Release No. 3	Release Date.: 2015/07/06

Chapter 7: Commissioning

7.1 E-Linac Commissioning

A commissioning plan ([Document-108335](#)) has been revised outlining the all activities and their correspondence with the relevant TSOP processes to ensure compliance with TRIUMF's Quality Management System. Principal among the processes are those for Commissioning TSOP-13, Operations Management TSOP-11, and Training TSOP-04. The plan identifies roles and responsibilities, engineered and administrative controls for safe operation, readiness requirements for equipment commissioning without and with beam, the acceptance criteria and deliverables for each stage of commissioning.

It is foreseen that Commissioning of the E-linac to 30 MeV and 100 kW will be accomplished in several stages. Figure 7-1 includes a layout of the different beam transport sections and the beam dumps associated with each of these sections. These are referenced in the following list of commissioning stages.

1. Injector Commissioning – beam energy up to 10 MeV with the average e-beam power increased up to 1kW delivered to the analyzing station EMBD.
2. Accelerator Commissioning – beam energy up to 30 MeV with average e-beam power to 30 kW delivered to EABD and subsequently to EHD, the high power beam dump.
3. High Power Commissioning – With a maximum accelerated energy of 30 MeV, progressively increase the beam power up to 100 kW.

Much of stages 1 and 2 will be conducted at low beam current and duty factor, leading to low average power, until such a time as the machine protection system is commissioned and the average beam power can be raised. The commissioning plan (Rel.3) submitted with this revised application describes the sub-stages to be followed for operation up to 1 kW. With successful commissioning at that level, the upper limit would be raised to the de-rated beam dump limit of 10 kW which will be in place for the next year. Once sufficient experience is acquired with these stages of commissioning, the plan will be revised to describe the steps that will be taken for High Power Test commissioning.

For each stage of commissioning equipment readiness of the relevant systems will be verified prior to the start of commissioning. In addition, the system commissioning and verification plans listed below have been prepared for the first phase of E-linac commissioning.

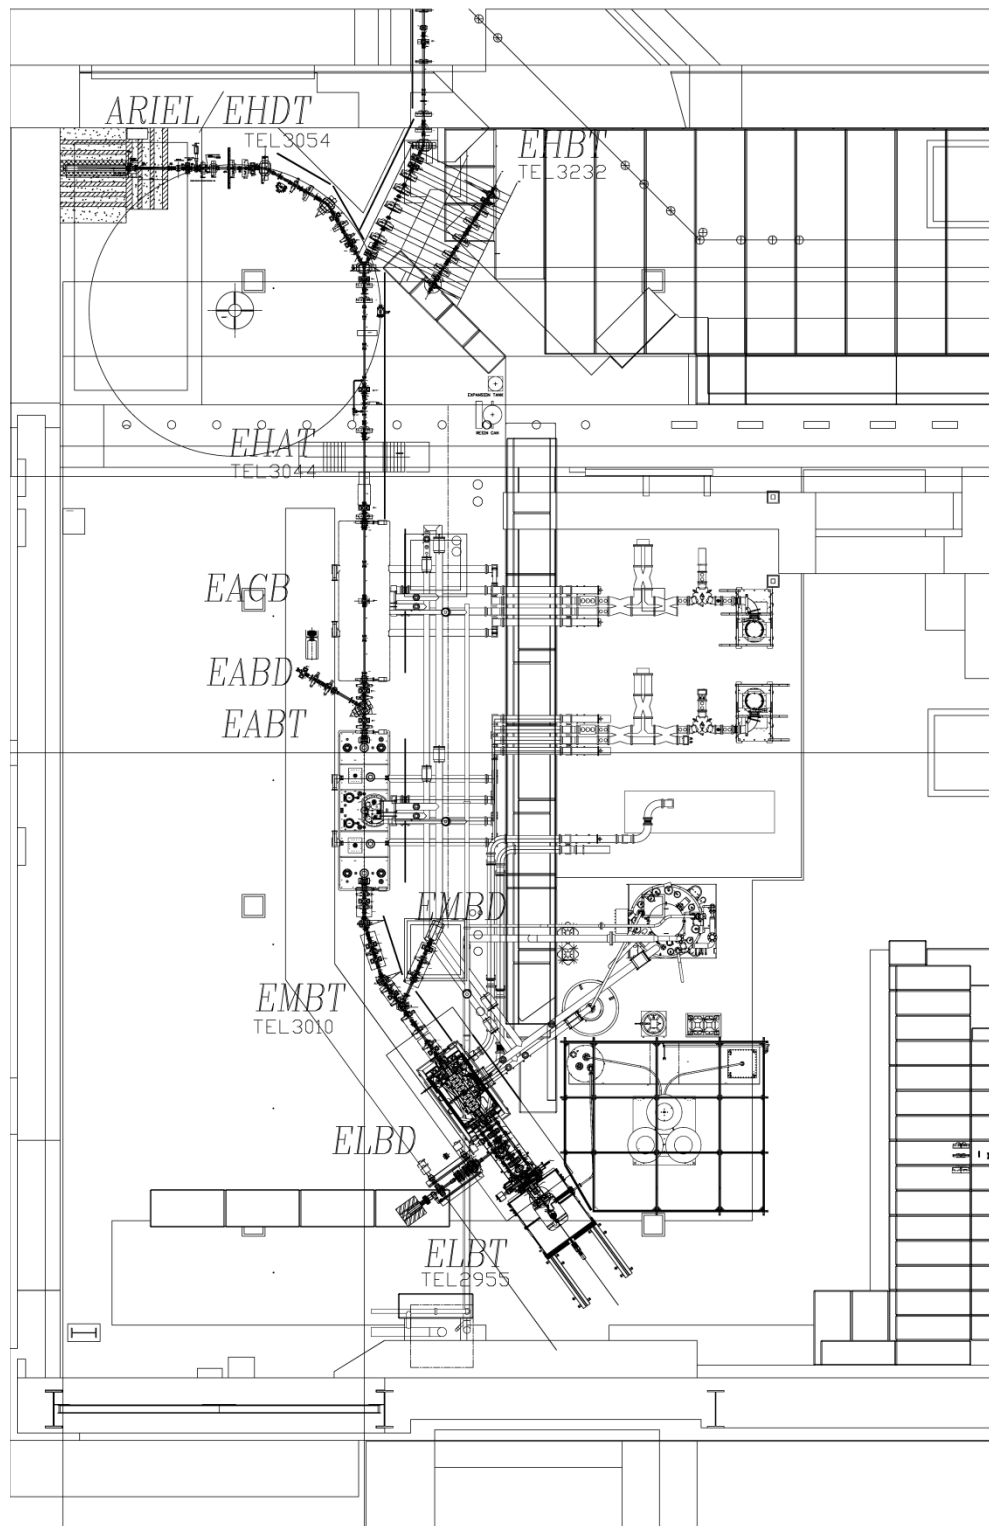


Figure 7-1 Electron Hall beam line component layout January 2014

ARIEL Facility Safety Report		
Document-51332	Release No. 3	Release Date.: 2015/07/06

7.2 Administrative Procedures

The commissioning plan (CP) describes roles and responsibilities for the commissioning team to ensure that operation for the purposes of commissioning adheres to the processes in TSOP-11 for the two basic activities at commissioned facilities - beam delivery and equipment maintenance. A commissioning schedule overseen by the head of commissioning will be followed that captures both beam commissioning and maintenance activities. Communication of the schedule will be via a web accessible calendar and a digest of the work completed will be captured in the TRIUMF site maintenance list. An electronic log will also be used for capturing the day's activities, and the seconded operator on day shifts will assist with these administrative operational tasks.

A process for transitioning from maintenance to commissioning activities has been defined and is consistent with TSOP-12 Configuration Management process for scheduled maintenance work. The CP outlines the process for configuration control during the installation and operations phases. Once equipment is commissioned, all maintenance work on the e-Linac will be controlled work. Fault reports will be used for managing repairs to equipment. These generate work permits for controlled work on all commissioned systems. TSN 1.5 Policy and Procedures for Defeat of Interlocks and for Device Disables will be followed.

7.3 E-Linac Radiation Safety System Commissioning

The commissioning plan ([Document-108174](#)) for the E-linac Radiation Safety Systems was used to carry out the system tests and a commissioning report completed by the Safety Systems Group prior to accelerating beam in the Electron Hall ([Document-109675](#)). The tests include: a check of all safety system device functionality; testing the Access Control System area safety unit functionality; verification of all signal inputs and outputs for the safety system PLC and relays; and a PLC simulator test for a variety of input signal states and confirming the correct output signal state. An addendum to these tests was completed once the eight watchman stations were installed and the record is [Document-114067](#).

In addition a verification exercise was designed to ensure that the search path defined by the eight watchman stations does provide good coverage of the E-Hall exclusion area. The verification plan ([Document-114264](#)) also captures a performance requirement of 100%. A record of successful completion of the exercises is [Document-114067](#).

7.4 Oxygen Deficiency Monitoring System Commissioning

The Oxygen Deficiency Monitoring System commissioning plan was released ([Document-110698](#)) and includes a full testing of the functionality of the system for each sensor; checks of all interior and exterior status indicator lights and alarms; checks of the remote controlled shut-off valves; with the above testing done with both a 19% and 17% O₂ gas mixture as well as a complete failure of the sensor. The commissioning report is [Document-113818](#).

ARIEL Facility Safety Report		
Document-51332	Release No. 3	Release Date.: 2015/07/06

7.5 Shielding and Radiological Assessment

A Shielding and Radiological Assessment Plan ([Document-108545](#)) describes the radiological measurements to be completed at each stage of commissioning. These include: prompt radiation dose rates outside shielding; measurements where possible inside shielding to verify the radiation field source term; residual activation dose rates for beam line components, beam line services systems; and lastly activity concentration for exhausted Electron Hall air and dump cooling water.

7.6 E-Linac Control Room Human Factors Engineering

It is anticipated that the verification and validation plans will be completed and reports written during the early stages of commissioning. Reports will be submitted to the CNSC for review by their human factors specialists.

7.7 Training Implementation

Training plans have been developed consistent with the Systematic Approach to Training (TSOP-04). The E-Linac training coordinator and the seconded operator have completed the E-Linac Commissioning Team Training Program (Document-120509). The framework for the program is a task analysis which draws on existing facility operations training plans and has been tailored for e-Linac systems and commissioning. Specifically the plan captures the different skill set of an operator versus an accelerator physicist, both of whom will carry out operational tasks at different times in the control room during commissioning. The broad category of tasks in the training plan include personnel safety alarm response, major equipment alarm response, access control system procedures for the E-Hall exclusion area, performance of administrative tasks, use of EPICS for monitoring the E-Linac control system, and operation and monitoring of all E-Linac systems. The plan does not include any operator training for beam tuning and delivery as those tasks will be performed by system experts during the commissioning phases.

In addition training has been implemented for all who access the E-Hall exclusion area.

- Working in Exclusion Areas Training - [Document-114192](#) – This training is required for all who access the E-Hall, which is an exclusion area. It includes training for Personnel Safety Alarm, Lock-out/Tagout as well as some on-the-job training.

Training needs analysis will be completed and training plans adjusted as new procedures are brought online and/or added to the e-Linac Operations Manual. The training needs will capture additional training requirements as we transition from operation by system experts to operation by non-experts in order ensure that the accelerator is operated safely.

:

ARIEL Facility Safety Report		
Document-51332	Release No. 3	Release Date.: 2015/07/06

Appendix A

This Appendix contains an up to date beam line layout for the Electron Hall, and Electron Hall architectural drawings from the as-built drawing package.

Electron Hall e-Linac beam line layout, Jan 2014 (as shown in Fig. 7-1)



TEL1814_3.pdf

TRIUMF dwg# 17660 Electron Hall Site Summary



17660_Ehall_COVER
SITE_Rec_Drwg.pdf

TRIUMF dwg# 17661 Electron Hall B3 plan



17661_Ehall_B3PLAN
.pdf

TRIUMF dwg# 17662 Electron Hall B2 plan



17662_Ehall_B2PLAN
.pdf

TRIUMF dwg# 17663 Electron Hall Grade plan



17663_Ehall_GRADE
_PLAN.pdf

TRIUMF dwg# 17664 Electron Hall Roof plan



17664_Ehall_ROOF.
pdf

TRIUMF dwg# 17665 Electron Hall Sections



17665_Ehall_SECTIO
NS.pdf

A complete set of architectural drawings including the ones attached here will be available on the TRIUMF document server.